LIGHT Impressions

2026 | 2027

Lámparas de Essen

LIGHT Impressions 2026 | 2027

Lámparas de Essen

Soluciones de iluminación profesionales. Diseñadas a medida. Disponibles rápidamente.

Desde hace más de 30 años, KS Licht, mayorista de iluminación con sede en Essen, es socio de electricistas, proyectistas y empresas. Con **LIGHT Impressions 2026 | 2027**, presentamos una selecta gama de luminarias para aplicaciones profesionales, proyectos comerciales y proyectos residenciales de alto nivel.

TIENDA ONLINE B2B Y ADQUISICIONES DIGITALES

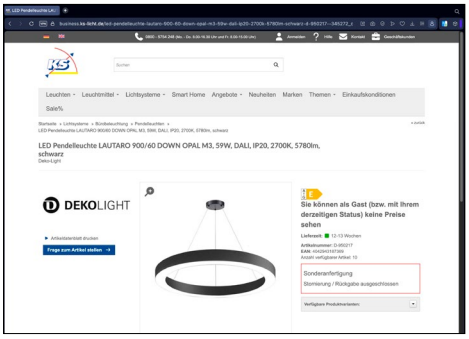

En la tienda online KS Multi Brand Business (ks-luz.es) encontrará productos actuales, novedades, ofertas y toda la información importante para su trabajo diario. Compruebe la disponibilidad en línea, busque y pida las piezas de recambio adecuadas y utilice catálogos, catálogos para hojear y enlaces a productos como ayuda rápida en el asesoramiento, la elaboración de presupuestos y la gestión de proyectos.

DISEÑO DE ILUMINACIÓN Y ASISTENCIA EN PROYECTOS

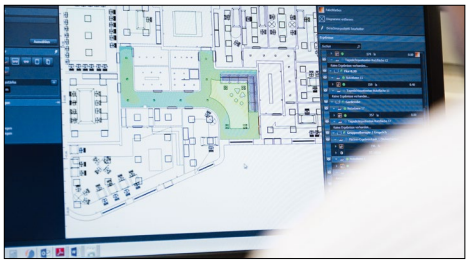

Ya se trate de oficinas, comercios, hostelería, hoteles, consultas médicas o edificios: le ayudamos a elegir las luminarias adecuadas y desarrollamos soluciones de iluminación prácticas para su proyecto. Nuestros diseñadores de iluminación le asesorarán personalmente y, si lo desea, le proporcionarán datos técnicos, textos de licitación, curvas de distribución luminosa y archivos LDT para la planificación y la ejecución.

EXPOSICIÓN Y ASESORAMIENTO CON CITA PREVIA

En nuestra exposición de Essen mostramos, en más de 300 m², una selección de luminarias de distintos fabricantes. Previa cita, estaremos encantados de asesorarle personalmente, comparar productos y mostrarle el efecto lumínico y la calidad directamente in situ.

PUNTO DE RECOGIDA EN ESSEN-FRILLENDORF

Los productos que se hayan pedido con recogida en Essen estarán a su disposición una vez que le hayamos avisado:
Manderscheidtstraße 12, 45141 Essen.
De lunes a jueves, de 8:30 a 16:00 h; viernes, de 8:30 a 15:00 h

Descubre ahora nuestra gama de productos, concierta una cita o solicita un proyecto de iluminación:
ks-luz.es

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 C
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

verkauf@ks-germany.com
www.ks-germany.com

LIGHTING DESIGN, VISUALISATION AND PROJECT SUPPORT

Professional lighting design provides confidence when implementing lighting projects. Realistic 3D visualisations, lighting calculations and lighting designs allow lighting effects, illuminance levels and potential energy savings to be evaluated before installation.

Comprehensive planning resources are available for the products featured in this catalogue. These include LDT data, DIALux data, technical product information and specification texts. This enables projects to be planned quickly, accurately and in compliance with applicable standards.

From the initial concept through to implementation, professional planning services support efficient, cost-effective and goal-oriented project execution.

In our main catalogue, you will find our complete product range as well as practical system solutions that combine luminaires, accessories and technology to form comprehensive concepts for a wide variety of applications.

DISCOVER

01 service
03 table of contents
04 areas of application
06 refurbishment solutions
08 product highlights

INTERIOR LIGHTS

20 pendant lights
40 surface mounted ceiling lights
86 built in ceiling lights
129 downlights
144 insert panels
162 surface mounted wall lights
172 built in wall lights
180 reading lights
190 table and floor lights
200 office lights
219 hall floodlight
229 damp-proof luminaires

TRUNKING SYSTEMS

240 trunking systems

SANOTRUNK UNIVERSAL
tool-free universal trunking refurbishment

POWER RAILS

266 D ONE 1-phase power rail system
287 1-phase power rail luminaires
302 D LINE 3-phase power rail system
334 D LINE DALI 3-phase power rail system
364 power rail luminaires

D LINE DALI
flexible multifunctional track system

BATTERY LIGHTS

414 battery lights

OUTDOOR LIGHTS

422 bollard lights
442 surface mounted wall lights
484 ceiling and wall lights
488 built in wall lights
494 spherical lamps
498 energy distributor
508 surface mounted / ground spike lights
520 wall washer
524 ground recessed lights
540 floodlight
544 display lights

SYSTEM LAUTARO

550 pendant lights

558 surface mounted ceiling lights

LAUTARO
circular lighting solution with system

SYSTEM PLANO

564 luminaire system

582 profile system

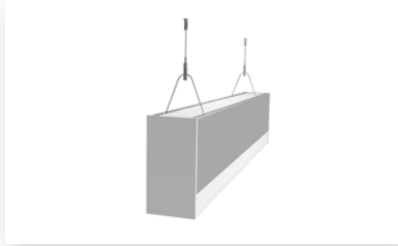

PLANO
individually configurable lighting system

SYSTEM COMBO

590 concrete profile

596 built-in profile

600 facade profile

604 insulation profile

606 click profile

COMBO
innovative profile-in-profile solution

ALUMINIUM PROFILES

614 linear light in 5 steps

618 assembly

620 homogeneous light image

622 U-profiles - flat + high - built-in / built-on

644 T-profiles - flat + high - built in

658 H- and groove-profiles

662 step/plinth/angle/corner-profiles - built-in/-on

684 dry construction profiles

704 tile profiles

712 profiles for outdoor usw - walk-/trafficable

LED STRIPES

724 quick finder

728 COB

744 12V

746 24V

770 48V

784 230V

786 mounting material for LED strips

POWER SUPPLIES

792 DC - CV

808 DC - CC

818 AC - CV

CONTROLLER

824 RF-smart

850 Casambi Bluetooth

852 DALI / DMX dimmer

ILLUMINANTS

860 MR16 / GU53

861 G9 - GU10

864 E27

867 GX53

ACCESSOERIES

872 indoor

875 outdoor

883 chemical products

LOOK UP

884 legend

886 lighting solutions

890 index

THE RIGHT LIGHTING FOR EVERY APPLICATION

Our versatile range for professional building lighting offers you the right solution - whether for refurbishment, modernisation or new build. With well thought-out lighting concepts and innovative products, we create optimum conditions for every application situation.

industrie
High-performance, efficient lighting creates optimal working conditions in industry, logistics, and manufacturing. DEKO-LIGHT offers durable lighting solutions that sustainably reduce energy consumption, maintenance requirements, and operating costs.

hotel and restaurant industry
Lighting creates atmosphere and shapes the character of hotels, restaurants, and cafés. Decorative fixtures and flexible lighting solutions help create inviting spaces with a special ambiance.

residantial
The right lighting lends every living space personality and comfort. Our versatile product range offers customized lighting solutions for stylish home designs.

retail
Professional lighting draws attention to products and creates a pleasant shopping experience. From track lighting to accent lighting, DEKO-LIGHT offers the right solution for modern retail spaces.

outdoor areas
Outdoor lighting combines safety, wayfinding, and architectural highlighting. Our extensive portfolio enables customized lighting concepts for facades, pathways, and outdoor areas.

office
Modern office lighting combines functionality, comfort, and design. High-quality lighting solutions create work environments that promote concentration, communication, and well-being.

educational institutions
Optimal lighting supports concentration, wayfinding, and a pleasant learning atmosphere. DEKO-LIGHT offers efficient lighting solutions for schools, universities, and educational institutions.

healthcare facilities
Professional lighting creates optimal conditions for treatment, orientation, and well-being. Our lighting solutions combine functionality with a pleasant and reassuring atmosphere.

SYSTEMATIC RETROFITTING

Rising energy costs, new efficiency requirements and outdated lighting systems make the modernisation of existing lighting systems more important than ever. With the SANOTRUNK UNIVERSAL and PRO OFFICE SANO refurbishment solutions, DEKO-LIGHT offers two cost-effective systems for quick and straightforward conversion to modern LED technology.

SANOTRUNK UNIVERSAL enables the refurbishment of existing T5 and T8 continuous lighting systems and is compatible with almost all standard track systems. PRO OFFICE SANO has been specially developed for replacing conventional grid-mounted luminaires and, thanks to its optimised dimensions, reliably covers existing installation channels.

Both systems offer the benefits of simple installation, high energy efficiency and modern light quality, whilst meeting the requirements for BEG funding. This allows existing lighting systems to be modernised quickly, cost-effectively and with minimal disruption to the existing infrastructure.

05
06

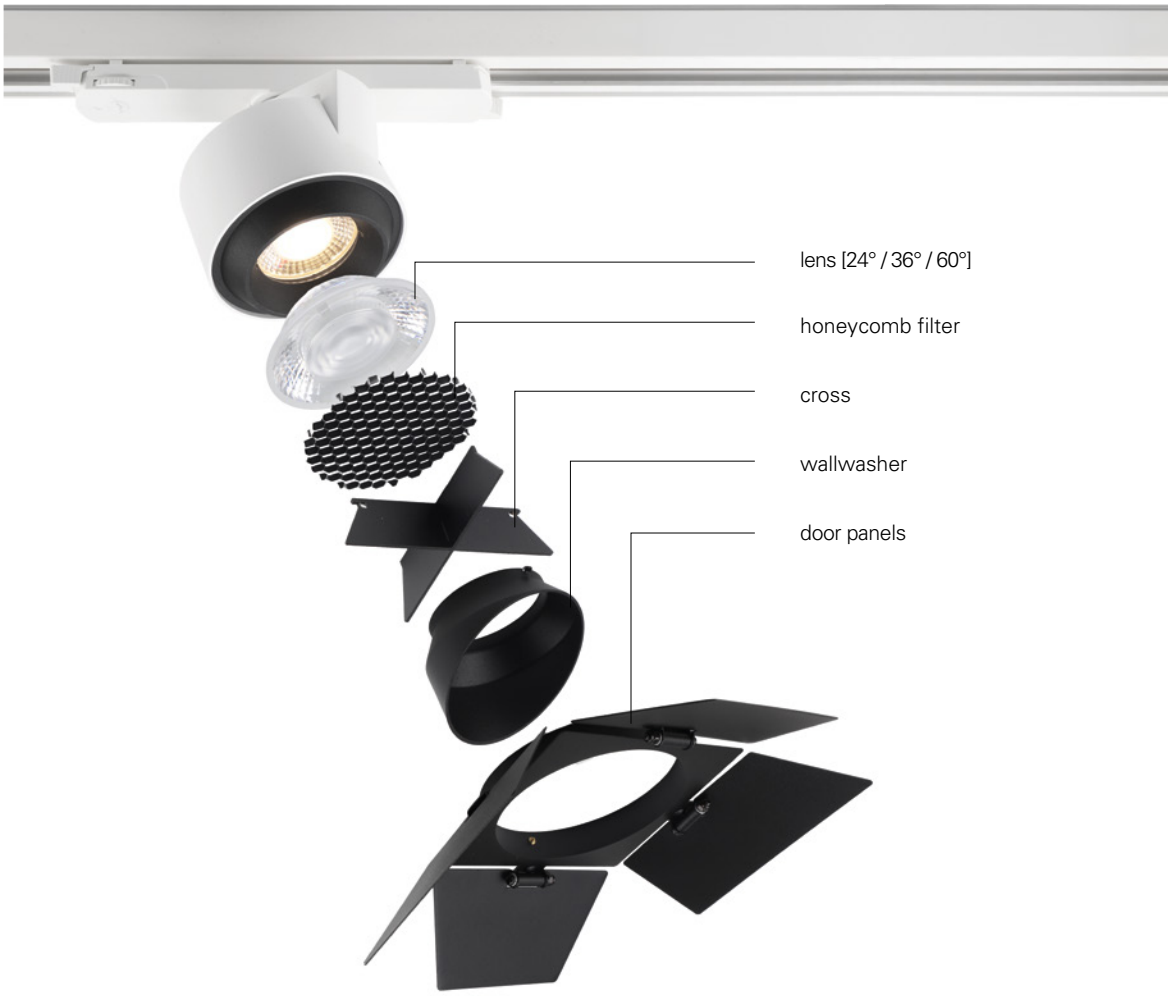

CERES – MAXIMUM FLEXIBILITY, SUPERIOR LIGHT QUALITY

Flexible 3-phase track spotlight with high energy efficiency and excellent light quality. Thanks to its extensive range of accessories, various power levels and colour temperatures of 3000 K and 4000 K, the luminaire can be perfectly adapted to individual lighting requirements. Available in ON/OFF and DALI versions and eligible for BEG funding.

FOCARIS – MAXIMUM PRECISION, COMPLETE FLEXIBILITY

The FOCARIS track spotlight combines maximum flexibility with precision lighting technology. Thanks to its continuously adjustable beam angle from 15° to 50° or 60°, the light can be precisely adapted to any application – without the need to change reflectors. The homogeneous light distribution ensures high-quality illumination of retail areas, exhibitions and display objects. Optional honeycomb louvres provide additional glare control. FOCARIS is available in TRI-AC and DALI versions, making it the ideal solution for demanding lighting applications.

CURVED D LINE – NEW FREEDOM FOR CREATIVE LIGHTING CONCEPTS

The CURVED D LINE track opens up entirely new design possibilities for modern lighting concepts. With its 90° bend [radius 1 m], it allows for the creation of semicircles, circles or waves. The 1.57 m-long segments can be used as both D LINE DALI and D LINE standard tracks. A wide range of mounting options ensures maximum flexibility during installation. Never before have there been so many possibilities for designing track lighting systems.

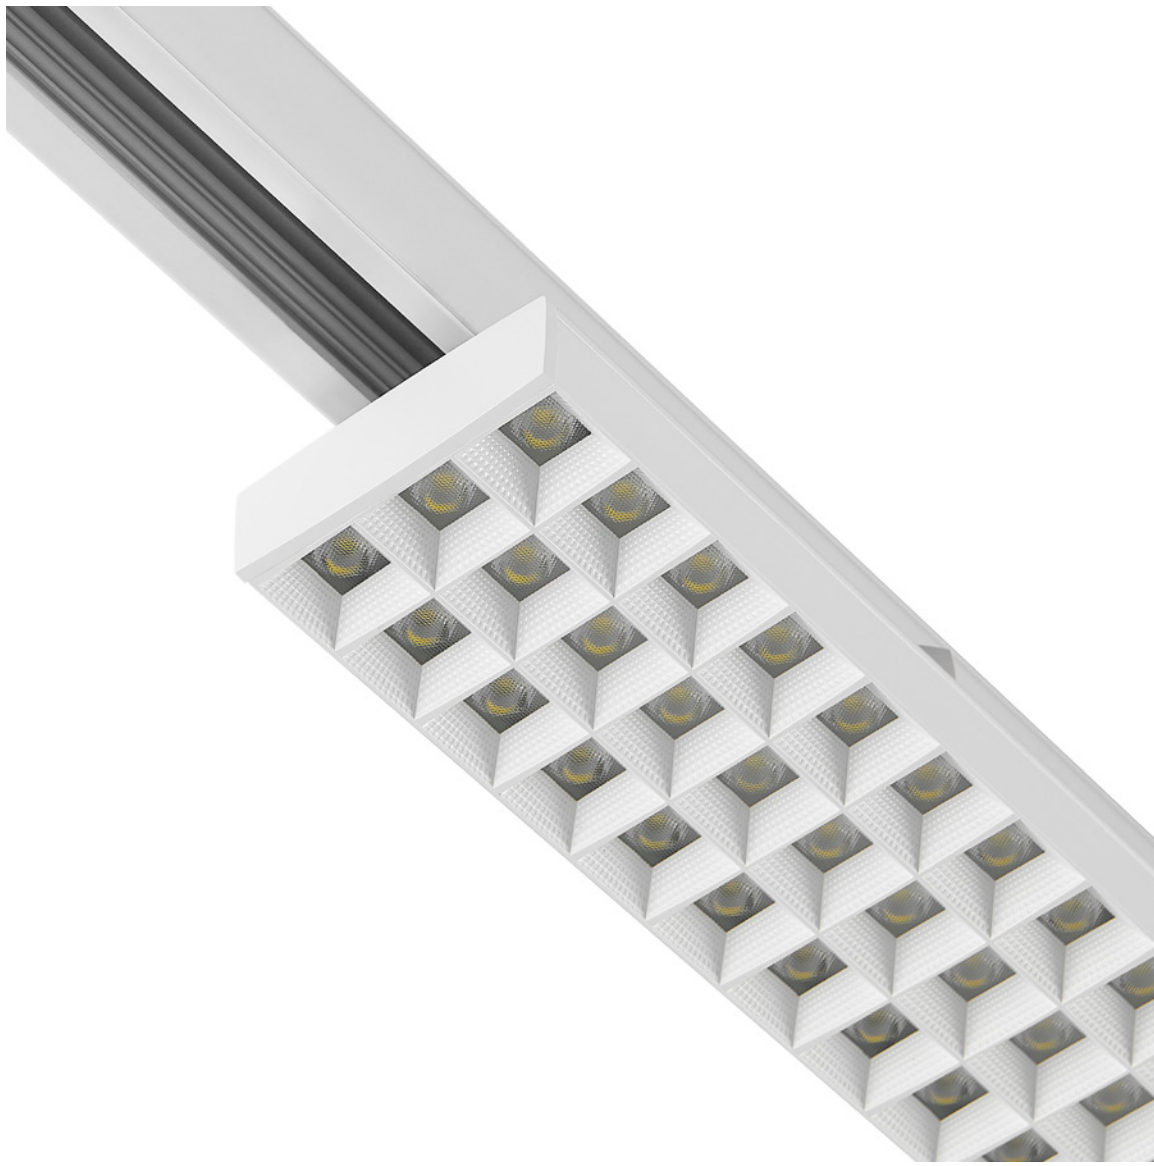

OFFICE SERIES – PROVEN LIGHTING QUALITY, NEW POSSIBILITIES

For years, the OFFICE THREE series has been synonymous with high-quality workplace lighting, offering excellent light quality and a high level of visual comfort. With the new pendant luminaire, the successful product family is expanding to include yet another solution for modern office and working environments. It is complemented by the LINEAR PRO OFFICE – the office version of the tried-and-tested LINEAR PRO track lighting series. Together, both product families offer comprehensive lighting solutions for modern working environments.

Whether for individual workstations, open-plan offices or meeting areas – thanks to their suitability for computer workstations, high colour rendering and eligibility for BEG funding, both the OFFICE THREE series and the LINEAR PRO OFFICE meet the requirements of modern office concepts. From table, floor and pendant luminaires to track lighting, DEKO-LIGHT offers the right solution for every lighting task.

FARO – PREMIUM BOLLARD LIGHTING FOR DEMANDING OUTDOOR AREAS

The FARO bollard luminaire series stands for high-quality outdoor lighting with exceptionally uniform light distribution and excellent glare control. With the new FARO ON/OFF, DEKO-LIGHT complements the existing FARO DALI with a more compact version for a wide range of lighting applications.

Robust materials, seawater-resistant properties and premium workmanship make FARO the ideal solution for pathways, public spaces and demanding outdoor environments.

RF-SMART SPOT – SMARTLY CONTROLLED, PERFECTLY STAGED

The RF-smart ground spike spotlights offer dimmable brightness and colour saturation, as well as 16 million colours and a continuously adjustable colour temperature. 18 pre-installed automatic programmes, together with the ability to synchronise multiple RF-smart components, ensure maximum flexibility. Control is conveniently carried out via RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included] or via any Zigbee 3.0-compatible control systems and apps such as Amazon Alexa, Google Assistant or Tuya [corresponding gateway required]. The RF-smart WIDE-SPOT provides even, wide-area illumination, whilst the RF-smart SPOT, with its narrow beam angle, is ideal for precise accent lighting.

COB STRIPS – GREATER EFFICIENCY, PERFECT LINES OF LIGHT

With the new COB Standard and Professional series, DEKO-LIGHT introduces a completely redesigned portfolio for modern linear lighting and architectural illumination. The new series impress with improved efficiency, expanded colour temperature options and attractive variants for a wide range of project requirements.

While the Standard series stands out with high light quality, RGBW technology and an excellent price-performance ratio, the Professional series sets new benchmarks in luminous efficacy, efficiency and light uniformity. Thanks to the dot-free COB technology, both series are ideally suited for demanding lighting concepts and premium lighting applications.

The portfolio is complemented by the proven specialist solutions for sauna and façade applications, which remain available.


+24V
-

24V+
W
B
G
R

DEKOLIGHT

INTERIOR LIGTHS

24 pendant lights
44 surface mounted ceiling lights
90 built in ceiling lights
132 downlights
148 insert panels
166 surface mounted wall lights
176 built in wall lights
184 reading lights
194 table and floor lights
204 office lights
222 hall floodlight
232 damp-proof luminaires

pendant lights

page 20

page 22

page 24

page 26

page 28

page 29

page 30

page 32

page 33

page 34

page 35

page 36

MENKAR

The pendant lights in the MENKAR series impress with clever lighting functions and high-quality aluminium accents. The separate rear light (approx. 15 - 20 % indirect light component) enables permanent indirect lighting. The light colour can be adjusted in 2 stages [3000/4000K] via a CCT switch.

page 40

CCT

MENKAR

- **Indirect and direct lighting**
- **High light intensity**
- **Light colour adjustable in two stages**
- **Can be suspended by up to 1,800/3,000 mm [depending on model]**
- **Optional diffuser lens for UGR<19**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Height	90 mm	CRI (Ra)	80
Base Height	30 mm	IK Protection Class	IK04



342201

Article	Housing Color			Luminous Flux	Power	Ø	Pendulum Length	Base Ø	Price
342201	White	WW	NW	3300/3500 lm	45.0 W	400 mm	1800 mm	100 mm	**€ 191.95**
342202	Black	WW	NW	3300/3500 lm	45.0 W	400 mm	1800 mm	100 mm	**€ 191.95**
342203	Light grey	WW	NW	3300/3500 lm	45.0 W	400 mm	1800 mm	100 mm	**€ 191.95**
342204	Dark brown	WW	NW	3300/3500 lm	45.0 W	400 mm	1800 mm	100 mm	**€ 191.95**
342205	White	WW	NW	5600/6000 lm	65.0 W	600 mm	1800 mm	120 mm	**€ 319.95**
342206	Black	WW	NW	5600/6000 lm	65.0 W	600 mm	1800 mm	120 mm	**€ 319.95**
342207	Light grey	WW	NW	5600/6000 lm	65.0 W	600 mm	1800 mm	120 mm	**€ 319.95**
342208	Dark brown	WW	NW	5600/6000 lm	65.0 W	600 mm	1800 mm	120 mm	**€ 319.95**
342209	White	WW	NW	8400/8700 lm	90.0 W	800 mm	3000 mm	150 mm	**€ 447.95**
342210	Black	WW	NW	8400/8700 lm	90.0 W	800 mm	3000 mm	150 mm	**€ 447.95**
342211	Light grey	WW	NW	8400/8700 lm	90.0 W	800 mm	3000 mm	150 mm	**€ 447.95**
342212	Dark brown	WW	NW	8400/8700 lm	90.0 W	800 mm	3000 mm	150 mm	**€ 447.95**

IP20

Accessories for **342201**, **342202**, **342203**, **342204**
930709 Diffusing lenses UGR 19 for Menkar 400 lamp **€ 11.95**

Accessories for **342205**, **342206**, **342207**, **342208**
930710 Diffusing lenses UGR 19 for Menkar 600 lamp **€ 19.95**

Accessories for **342205**, **342206**, **342207**, **342208**, **342209**, **342210**, **342211**, **342212**
843340 DALI, Triac dimmer, 100-240 V, 400 W, IP20 **€ 59.95**

Accessories for **342209**, **342210**, **342211**, **342212**
930711 Diffusing lenses UGR 19 for Menkar 800 lamp **€ 31.95**

Accessories for **342210**, **342211**, **342212**
843503 RF-smart, Triac dimmer, 230 V, 300 W, IP20 **€ 55.95**

MEROPE

The pendant lamps of the MEROPE series combine timeless elegance and subdued modernity. Available in the diameters 380, 580 and 780 mm, the light colour [3,000/4,000 K] can be selected before installation using a CCT switch. The exterior finish is brushed aluminium in the colours coffee and silver or matt powder-coated in black and white.

page 42

CCT

MEROPE

- **Light colour adjustable in two stages**
- **Can be suspended by up to 1,800/3,000 mm [depending on model]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Height	35 mm	CRI (Ra)	80
Base Height	65 mm	IK Protection Class	IK04



342189

Article	Housing Color			Luminous Flux	Power	Ø	Pendulum Length	Base Ø	Price
342189	White	WW	NW	2100/2200 lm	30.0 W	380 mm	1800 mm	220 mm	**€ 167.95**
342190	Black	WW	NW	2100/2200 lm	30.0 W	380 mm	1800 mm	220 mm	**€ 167.95**
342191	Light grey	WW	NW	2100/2200 lm	30.0 W	380 mm	1800 mm	220 mm	**€ 167.95**
342192	Dark brown	WW	NW	2100/2200 lm	30.0 W	380 mm	1800 mm	220 mm	**€ 167.95**
342193	White	WW	NW	3100/3200 lm	42.0 W	580 mm	1800 mm	220 mm	**€ 223.95**
342194	Black	WW	NW	3100/3200 lm	42.0 W	580 mm	1800 mm	220 mm	**€ 223.95**
342195	Light grey	WW	NW	3100/3200 lm	42.0 W	580 mm	1800 mm	220 mm	**€ 223.95**
342196	Dark brown	WW	NW	3100/3200 lm	42.0 W	580 mm	1800 mm	220 mm	**€ 223.95**
342197	White	WW	NW	4800/4900 lm	60.0 W	780 mm	3000 mm	275 mm	**€ 375.95**
342198	Black	WW	NW	4800/4900 lm	60.0 W	780 mm	3000 mm	275 mm	**€ 375.95**
342199	Light grey	WW	NW	4800/4900 lm	60.0 W	780 mm	3000 mm	275 mm	**€ 375.95**
342200	Dark brown	WW	NW	4800/4900 lm	60.0 W	780 mm	3000 mm	275 mm	**€ 375.95**

IP20

Accessories

843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20		**€ 55.95**
843340	DALI, Triac dimmer, 100-240 V, 400 W, IP20		**€ 59.95**

SLIM ROUND

SLIM series lights include single-luminaire and triple-luminaire pendant lamps, recessed ceiling lights and matching pendant lamps for the DEKO-LIGHT current track system. The die-cast aluminium light body is the same size for all variants (300 × 39 mm). Several SLIM models therefore can also be combined with each other in larger spaces. The pendant lamps for ceiling installation with max. 180 cm suspended mounting are available in a one or three-luminaire variant; three-luminaire variant both with long or round base depending on the arrangement of the lights.
While the fixed SLIM models create a pleasant warm white light in dining rooms, reading nooks and more, the single-luminaire SLIM current track light is ideal for gastronomy and retail projects with changing room layouts. The premium SLIM series is rounded off with the opportunity for customisation using interchangeable reflector rings and lenses.

Ra>90 UGR<19

SLIM ROUND

- **Extra-soft fabric cable**
- **Glare-free, due to low UGR value [<19]**
- **Slim design at just 39 mm in diameter**
- **Incl. silver-coloured reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Height	25 mm
Colour Temperature	2700 K	Power Supply Unit incl.	Yes
Rated Input Voltage	220-240 V/AC	Light Beam Angle	24 Degree
Height	300 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	39 mm		
Pendulum Length	1800 mm	CRI (Ra)	90



342237

Article	Housing Color		Luminous Flux	Power	Base Ø	Price
342237	Black	WW	500 lm	5.0 W	100 mm	**€ 67.95**
342238	White	WW	500 lm	5.0 W	100 mm	**€ 67.95**
342241	Black	WW	1500 lm	15.0 W	240 mm	**€ 167.95**
342242	White	WW	1500 lm	15.0 W	240 mm	**€ 167.95**

IP20

Accessories

930744	Reflector ring white for Slim series	**€ 3.95**
930745	Reflector ring black for Slim series	**€ 3.95**
930746	Reflector ring gold-coloured for Slim series	**€ 4.75**
930747	24° lens for Slim series	**€ 3.95**
930748	36° lens for Slim series	**€ 3.95**
930749	60° lens for Slim series	**€ 3.95**

Accessories for **342237**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black	**€ 23.95**

Accessories for **342238**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white	**€ 23.95**

Accessories for **342241**, **342242**

843340	DALI, Triac dimmer, 100-240 V, 400 W, IP20	**€ 59.95**
843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20	**€ 55.95**

LUCEA CCT

LUCEA series pendant lights with CCT are available in 10, 15 and 20 W versions and offer up to 2,000 lumens of light output. The maximum suspended mounting is 1,800 mm. Optional lenses can be used to narrow or expand the light emission angle of the individual models. LUCEA lights feature a die-cast aluminium housing.

page 60

page 62

page 400

page 404

CCT Ra>90 SDCM<5

LUCEA CCT

- **Light colour adjustable in two stages**
- **Incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000 K	Light Beam Angle	36 Degree
Rated Input Voltage	220-240 V/AC	Control	Leading-edge dimmer, Trailing-edge dimmer
Pendulum Length	1800 mm	CRI (Ra)	90
Base Height	29 mm	IK Protection Class	IK03
Base Ø	104.5 mm		



342177

Article	Housing Color			Luminous Flux	Power	Height	Ø	Price
342177	White	WW	NW	930/1000 lm	10.0 W	157 mm	65 mm	**€ 111.95**
342178	Black	WW	NW	930/1000 lm	10.0 W	157 mm	65 mm	**€ 111.95**
342181	White	WW	NW	1930/2000 lm	20.0 W	178 mm	85 mm	**€ 143.95**
342182	Black	WW	NW	1930/2000 lm	20.0 W	178 mm	85 mm	**€ 143.95**

IP20

Accessories for **342177**, **342178**

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

Accessories for **342177**, **342181**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white	**€ 23.95**

Accessories for **342178**, **342182**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black	**€ 23.95**

Accessories for **342181**, **342182**

930680	Lens 24° for Lucea 15/20	**€ 9.95**
930681	Lens 60° for Lucea 15/20	**€ 9.95**
930759	Reflector ring for Lucea 15/20 white	**€ 4.75**
930760	Reflector ring for Lucea 15/20 black	**€ 4.75**
930761	Reflector ring for Lucea 15/20 gold	**€ 4.75**

Ra>90 SDCM<5

LUCEA

- **Extra-soft fabric cable**
- **Incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Ø	104.5 mm
Colour Temperature	2700 K	Power Supply Unit incl.	Yes
Rated Input Voltage	200-240 V/AC	Light Beam Angle	36 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm		
Pendulum Length	1800 mm	CRI (Ra)	90
Base Height	29 mm	IK Protection Class	IK03

Article	Housing Color		Luminous Flux	Power	Price
342243	White	WW	800 lm	6.0 W	**€ 103.95**
342244	Black	WW	800 lm	6.0 W	**€ 103.95**
342245	White	WW	1300 lm	10.0 W	**€ 111.95**
342246	Black	WW	1300 lm	10.0 W	**€ 111.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

Accessories for **342243**, **342245**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white	**€ 23.95**

Accessories for **342244**, **342246**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black	**€ 23.95**

page 64

page 64

page 296

page 297

dtw Ra>90

LUCEA DTW

- **Extra-soft fabric cable**
- **Dim-to-warm 1,800 K-2,700 K**
- **Incl. black reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Pendulum Length	1800 mm
Colour Temperature	1800-2700 K	Power Supply Unit incl.	Yes
Luminous Flux	750 lm	Light Beam Angle	36 Degree
Power	10 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	200-240 V/AC		
Height	157 mm	CRI (Ra)	90
Ø	65 mm	IK Protection Class	IK03

Article	Housing Color		Price
342247	White	WW	**€ 119.95**
342248	Black	WW	**€ 119.95**

IP20

Accessories

930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

Accessories for **342247**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white	**€ 23.95**

Accessories for **342248**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black	**€ 23.95**

page 60

page 62

page 400

page 404

CAN

The CAN pendant light in lengths 150 mm and 350 mm combines modern design with practical functionality. The GU10 base enables quick and simple replacement of the lamp. The screw-on cylinder enables tool-free maintenance and optional decorative rings allow colourful accents to be created. The pendant light is part of the CAN series, which also contains ceiling, wall, reading and outdoor lights and therefore provides versatile application options for private and commercial spaces.

page 68

page 70

page 167

page 168





CAN

- **Flat and discreet lamp base**
- **Can be customised with a wide range of accessories**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Max. Power	1x max. 7.5 W
Ø	60 mm	Rated Input Voltage	220-240 V/AC
Pendulum Length	1700 mm	Control	Dimmable via optional light source
Base Height	27 mm		
Base Ø	60 mm		

Article	Housing Color	Height	Price
342254	White	150 mm	**€ 51.95**
342255	Black	150 mm	**€ 51.95**
342256	White	350 mm	**€ 59.95**
342257	Black	350 mm	**€ 59.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

Accessories for **342254**, **342256**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white	**€ 23.95**

Accessories for **342255**, **342257**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black	**€ 23.95**

LAMP SOCKET SEGULA DESIGN BULBS

The pendant lights are fitted with textile cables. This generous cable length enables flexible installation even in high rooms and allows individual height adjustment depending on the installation situation. The housing is characterised by a reduced, clear design language and is therefore ideal for modern architectural and lighting concepts in interiors. The E27 sockets used are deliberately oversized. The enlarged sleeve creates a visually harmonious unit between the socket and light source - without visible transitions or technical breaks. Compatible with our DESIGN-BULB light sources, this pendant luminaire is particularly suitable for project-oriented applications in the interior design, shop fitting or catering sectors. It provides an ideal basis for decorative lighting solutions with design requirements.

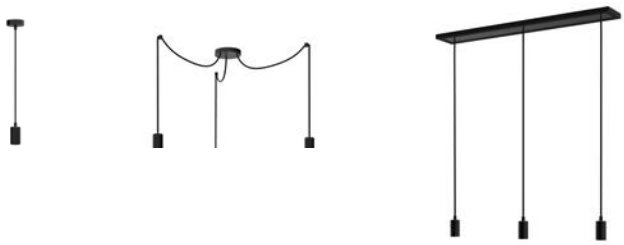

LAMP SOCKET SEGULA DESIGN BULBS

- **Sliding E27 socket sleeve(s) for adapting to lamps with special dimensions**
- **Ideal for use in conjunction with our designer bulb series**
- **Soft textile cable**
- **High-quality surface finish**

Housing	Metal, Plastic	Rated Input Voltage	220-240 V/AC
Height	80 mm	Connection Type	Connectionbox IP20
Ø	50 mm		

Article	Housing Color	Max. Power	Base Length	Base Width	Base Height	Base Ø	Price
930908	Black	1x max. 60.0 W			20 mm	100 mm	**€ 47.95**
930909	Black	1x max. 60.0 W			20 mm	100 mm	**€ 55.95**
930965	Black	3x max. 57.0 W			25 mm	125 mm	**€ 155.95**
930966	Black	3x max. 57.0 W	990 mm	150 mm	25 mm		**€ 263.95**

IP20 | E27

Ra>90

DEKO-LIGHT LED DESIGN-BULB ORBIT E27 DIMMABLE

- **Glass body is manufactured by hand**
- **Filigree lamp**
- **Reflections create the impression of floating light**
- **Patented soft filament technology**
- **Suitable for decorative and creative lights with and without lampshade**
- **Ideal for use in combination with our sockets with sliding socket sleeve**

Housing	Glass	Rated Input Voltage	220-240 V/AC
Light Beam Angle	330 Degree	Life Time	20000 h
Height	120 mm	Control	Trailing-edge dimmer
Ø	220 mm	Channels	1

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Power Consumption	CRI (Ra)	EEI	Price
180731	Smoky	WW 1900 K	185 lm	4.5 W	5 kWh/1000h	85		**€ 109.95**
180730	Gold	WW 2200 K	240 lm	4.0 W	4 kWh/1000h	90	G	**€ 109.95**

E27 | IP20 | 1 CH

DEKO-LIGHT LED DESIGN BULB SHINE E27 DIMMABLE

Let our new designer light series ORBIT, SHINE and MOON take you into the world of style. The sophisticated luminous elements and the reflections generated in the glass create the impression of floating light. Whether light and airy in your living room at home or opulent and spacious in the hotel lobby - the dimmable LED lamps from the designer bulb series are perfect for open lights without shades or lampholders with E27 sockets and are a real eye-catcher wherever they are used.

Ra>90

DEKO-LIGHT LED DESIGN BULB SHINE E27 DIMMABLE

- **Glass body is manufactured by hand**
- **Filigree lamp**
- **Reflections create the impression of floating light**
- **Patented soft filament technology**
- **Suitable for decorative and creative lights with and without lampshade**
- **Ideal for use in combination with our sockets with sliding socket sleeve**

Housing	Glass	Rated Input Voltage	220-240 V/AC
Light Beam Angle	330 Degree	Life Time	20000 h
Height	190 mm	Control	Trailing-edge dimmer
Ø	200 mm	Channels	1
Power Consumption	5 kWh/1000h		

Article	Housing Color	Colour Temperature	Luminous Flux	Power	CRI (Ra)	EEI	Price
180733	Smoky	WW 1900 K	210 lm	5.0 W	85		**€ 93.95**
180732	Gold	WW 2200 K	300 lm	4.5 W	90	A G	**€ 93.95**

E27 | IP20 | 1 CH

Ra>90

DEKO-LIGHT LED DESIGN BULB MOON E27 DIMMABLE

Housing	Glass	Control	Trailing-edge dimmer
Light Beam Angle	330 Degree	Channels	1
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Height	Ø	EEI	Price
180734	Smoky	WW 1900 K	220 lm	6.0 W	165 mm	125 mm		**€ 56.95**
180735	Smoky	WW 1900 K	260 lm	6.0 W	185 mm	150 mm		**€ 64.95**
180736	Smoky	WW 1900 K	300 lm	6.0 W	230 mm	200 mm		**€ 89.95**
180737	Smoky	WW 1900 K	350 lm	8.0 W	320 mm	300 mm		**€ 199.95**
180741	Black	WW 2200 K	240 lm	4.0 W	165 mm	125 mm	A G	**€ 71.95**
180742	Black	WW 2200 K	240 lm	4.0 W	200 mm	150 mm	A G	**€ 91.95**
180743	Black	WW 2200 K	240 lm	4.0 W	230 mm	200 mm	A G	**€ 119.95**

E27 | IP20 | 1 CH

68 MM CEILING MOUNT ADAPTER FOR PENDANT LAMPS

The recessed ceiling adapter is the ideal solution for discreetly and securely installing pendant lights weighing up to 2.5 kg. Thanks to the integrated three-pin connection box with strain relief and feed-through wiring, the adapter can be connected to the power supply quickly and reliably. Suitable for cable diameters of 5-7 mm and ceiling thicknesses of 2-15 mm, the adapter ensures that the light is seamlessly integrated into the ceiling. The result: A simple, high-quality look that discreetly conceals all electrical components and meets the highest aesthetic demands.

68 MM CEILING MOUNT ADAPTER FOR PENDANT LAMPS

- **Secure installation of pendant lamps in 68 mm ceiling recesses**
- **Includes three-pin connection box with strain relief and feed-through wiring**
- **Suitable for cable diameters of 5-7 mm**
- **Suitable for ceiling thicknesses of 2-15 mm**

Housing	Polycarbonate, Steel	Installation Depth	27 mm
Height	32 mm	Cut Out Ø	65-75 mm
Ø	90 mm		

Article	Housing Color	Price
930913	White	**€ 23.95**
930914	Black	**€ 23.95**

IP20

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

surface mounted ceiling lights

page 40

page 42

page 44

page 46

page 48

page 50

page 51

page 54

page 55

page 56

page 57

page 58

page 59

page 60

page 62

page 64

page 64

page 66

page 67

page 68

page 69

page 70

page 72

page 76

page 76

page 78

page 79

page 80

page 83

MENKAR

MENKAR series ceiling and wall lights feature clever lighting functions and high-quality aluminium accents. The rear light (approx. 15-20 % indirect light) also allows additional indirect lighting.

page 20

CCT

MENKAR

- **Direct and indirect lighting (light proportion approx. 15-20 %)**
- **Light colour adjustable in two steps**
- **Optional diffuser lens for UGR<19**
- **Can be used as a wall or ceiling light (depending on model)**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium, Polycarbonate, Steel	Power Supply Unit incl.	Yes
		Control	Leading-edge dimmer, Trailing-edge dimmer
Colour Temperature	3000/4000 K		
Height	90 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK04



348198

Article	Housing Color			Luminous Flux	Surface	Ø	Power	Price
348200	Light grey	WW	NW	3300/3500 lm	Brushed	400 mm	45.0 W	**€ 175.95**
348201	Dark brown	WW	NW	3300/3500 lm	Brushed	400 mm	45.0 W	**€ 175.95**
348198	White	WW	NW	3300/3500 lm	Matt	400 mm	45.0 W	**€ 175.95**
348199	Black	WW	NW	3300/3500 lm	Matt	400 mm	45.0 W	**€ 175.95**
348204	Light grey	WW	NW	5600/6000 lm	Brushed	600 mm	65.0 W	**€ 303.95**
348205	Dark brown	WW	NW	5600/6000 lm	Brushed	600 mm	65.0 W	**€ 303.95**
348202	White	WW	NW	5600/6000 lm	Matt	600 mm	65.0 W	**€ 303.95**
348203	Black	WW	NW	5600/6000 lm	Matt	600 mm	65.0 W	**€ 303.95**
348208	Light grey	WW	NW	8400/8700 lm	Brushed	800 mm	90.0 W	**€ 431.95**
348209	Dark brown	WW	NW	8400/8700 lm	Brushed	800 mm	90.0 W	**€ 431.95**
348206	White	WW	NW	8400/8700 lm	Matt	800 mm	90.0 W	**€ 431.95**
348207	Black	WW	NW	8400/8700 lm	Matt	800 mm	90.0 W	**€ 431.95**

Accessories for **348198**, **348199**, **348200**, **348201**
930709 Diffusing lenses UGR 19 for Menkar 400 lamp **€ 11.95**

Accessories for **348202**, **348203**, **348204**, **348205**
930710 Diffusing lenses UGR 19 for Menkar 600 lamp **€ 19.95**

Accessories for **348206**, **348207**, **348208**, **348209**
930711 Diffusing lenses UGR 19 for Menkar 800 lamp **€ 31.95**

Accessories
843503 RF-smart, Triac dimmer, 230 V, 300 W, IP20 **€ 55.95**
843340 DALI, Triac dimmer, 100-240 V, 400 W, IP20 **€ 59.95**

MEROPE

The timeless MEROPE demonstrates not only impressively high luminous flux and a low assembly height, it is also highly visually appealing thanks to its elegant outer aluminium ring – available in sandblasted white or black, brushed in silver or on-trend coffee. Available in the diameters 380 mm, 580 mm and 780 mm, the MEROPE can be integrated into very different environments even more flexibly.

In addition, the light colour can be adjusted in 2 stages, 3,000 K or 4,000 K.

page 22

CCT

MEROPE

- **High luminous flux**
- **Light colour adjustable in 2 stages**
- **Low assembly height**

Application Area
Home / Living

Housing	Aluminium	Control	Leading-edge dimmer, Trailing-edge dimmer
Colour Temperature	3000/4000 K		
Height	60 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK04
Power Supply Unit incl.	Yes		



348186

Article	Housing Color			Luminous Flux	Surface	Ø	Power	Price
348188	Light grey	WW	NW	2100/2200 lm	Brushed	380 mm	30.0 W	**€ 151.95**
348189	Dark brown	WW	NW	2100/2200 lm	Brushed	380 mm	30.0 W	**€ 151.95**
348186	White	WW	NW	2100/2200 lm	Matt	380 mm	30.0 W	**€ 151.95**
348187	Black	WW	NW	2100/2200 lm	Matt	380 mm	30.0 W	**€ 151.95**
348192	Light grey	WW	NW	3100/3200 lm	Brushed	580 mm	42.0 W	**€ 219.95**
348193	Dark brown	WW	NW	3100/3200 lm	Brushed	580 mm	42.0 W	**€ 219.95**
348190	White	WW	NW	3100/3200 lm	Matt	580 mm	42.0 W	**€ 219.95**
348191	Black	WW	NW	3100/3200 lm	Matt	580 mm	42.0 W	**€ 219.95**
348196	Light grey	WW	NW	4800/4900 lm	Brushed	780 mm	60.0 W	**€ 359.95**
348197	Dark brown	WW	NW	4800/4900 lm	Brushed	780 mm	60.0 W	**€ 359.95**
348194	White	WW	NW	4800/4900 lm	Matt	780 mm	60.0 W	**€ 359.95**
348195	Black	WW	NW	4800/4900 lm	Matt	780 mm	60.0 W	**€ 359.95**

IP20

Accessories

843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20	**€ 55.95**
843340	DALI, Triac dimmer, 100-240 V, 400 W, IP20	**€ 59.95**

SCULPTORIS

Modern elegance for ceilings; the ceiling lights from the SCULPTORIS series can be used in a number of ways indoors thanks to different outputs, sizes and colour temperatures. The surface-mounted ceiling lights provide extensive illumination for rooms and also look great as wall lights.
The light is softly and extensively diffused through the large, circumferential diffuser with matt aluminium design and illuminates rooms pleasantly and evenly.

The light colours warm white (3,000 K) or neutral white (4,000 K) can be set for each variant.

CCT

SCULPTORIS

- **Light colour adjustable in 2 stages**
- **Uniform illumination**
- **Circumferential diffuser**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	150 Degree
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Surface	Matt		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	IK Protection Class	IK04



348180

Article	Housing Color			Luminous Flux	Height	Ø	Power	Price
348180	White	WW	NW	2000/2100 lm	100 mm	400 mm	30.0 W	**€ 215.95**
348181	Black	WW	NW	2000/2100 lm	100 mm	400 mm	30.0 W	**€ 215.95**
348182	White	WW	NW	3000/3100 lm	130 mm	600 mm	42.0 W	**€ 279.95**
348183	Black	WW	NW	3000/3100 lm	130 mm	600 mm	42.0 W	**€ 279.95**

IP20

Accessories

843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20		**€ 55.95**
843340	DALI, Triac dimmer, 100-240 V, 400 W, IP20		**€ 59.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

ZANIAH

Whilst flat surfaces and covers are the go-to for most surface-mounted ceiling lights, the ZANIAH places special emphasis on its 360° lamp [either a 12 W, 18 W or 24 W variant]. Replaceable covers allow the visual appearance of ZANIAH to be changed even after installation. The covers are available in eight colour variants, allowing plenty of scope for customisation.



IK05

ZANIAH

- **Can be customised using coloured covers**
- **360° light emission angle**
- **Can be used as a wall or ceiling light**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Hotel / catering

Housing	Aluminium	Control	Leading-edge dimmer, Trailing-edge dimmer
Colour Temperature	3000 K		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	IK Protection Class	IK05
Light Beam Angle	120 Degree		

Article	Housing Color		Luminous Flux	Height	Ø	Power	EEI	Price
620033	Light grey	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 79.95**
620034	Blue	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 79.95**
620035	Green	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 79.95**
620036	Red	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 79.95**
620037	Yellow	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 79.95**
620038	Dark grey	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 79.95**
620039	Black	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 79.95**
620040	White	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 79.95**
620041	Light grey	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 87.95**
620042	Blue	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 87.95**
620043	Green	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 87.95**
620044	Red	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 87.95**
620045	Yellow	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 87.95**
620046	Dark grey	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 87.95**
620047	Black	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 87.95**
620048	White	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 87.95**
620049	Light grey	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 95.95**
620050	Blue	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 95.95**
620051	Green	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 95.95**
620052	Red	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 95.95**
620053	Yellow	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 95.95**
620054	Dark grey	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 95.95**
620055	Black	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 95.95**
620056	White	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 95.95**

IP20

ALTAIS 2 ROUND

The ALTAIS 2 Round is a modern ceiling and wall luminaire that is ideal for lighting solutions in commercial, public and private areas. Its clear, round design blends into a wide variety of architectural settings - from technical rooms, corridors and stairwells to modern residential and commercial areas. Thanks to the integrated CCT switch, the light colour can be adjusted in three stages (2700K / 3000K / 4000K). The output can also be adjusted in two stages to optimise energy efficiency and luminous efficacy depending on the room requirements. With through-wiring and surface-mounted cable entries, the installation options are very flexible. Installation is convenient thanks to a practical and time-saving click system.

As an eligible product in accordance with the requirements of the Federal Subsidy for Efficient Buildings (BEG), the ALTAIS 2 Round also contributes to energy-efficient refurbishment - a plus point for sustainable projects.

BEG CCT IK10 IP54 power switch SDCM<3 UGR<22

ALTAIS 2 ROUND

- **Light colour adjustable in 3 stages**
- **Power adjustable in 2 steps**
- **through-wiring possible**
- **Easy installation thanks to click system**
- **Optional surface-mounted cable entry**
- **BEG eligible**

Application Area
Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living, Retrofit / Refurbishment

Housing	Polycarbonate	Rated Input Voltage	100-240 V/AC
Colour Temperature	2700/3000/4000 K	Light Beam Angle	120 Degree
Height	52 mm	CRI (Ra)	85
Base Height	20.5 mm	IK Protection Class	IK10



348276

Article	Housing Color		Luminous Flux	Ø	Base Ø	Power Selectable	Price
348276	White	WW NW	1725/1800/1800 lm	220 mm	180 mm	10.0 W / 15.0 W	**€ 55.95**
348277	White	WW NW	2070/2160/2160 lm	280 mm	240 mm	13.0 W / 18.0 W	**€ 67.95**
348278	White	WW NW	2875/3000/3000 lm	330 mm	280 mm	18.0 W / 25.0 W	**€ 79.95**

IP54

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

BEG CCT IK10 IP54 power switch SDCM<3 UGR<22

ALTAIS 2 ROUND MOTION

- **Light colour adjustable in 3 stages**
- **Power adjustable in 2 levels**
- **Adjustable motion detector with corridor function**
- **through-wiring possible**
- **Easy installation thanks to click system**
- **Optional surface-mounted cable entry**
- **BEG eligible**

Application Area
Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living, Retrofit / Refurbishment

Housing	Polycarbonate	Light Beam Angle	120 Degree
Colour Temperature	2700/3000/4000 K	CRI (Ra)	85
Height	52 mm	Motion Detector	Yes
Base Height	20.5 mm	IK Protection Class	IK10
Rated Input Voltage	100-240 V/AC		



348279

Article	Housing Color		Luminous Flux	Ø	Base Ø	Power Selectable	Price
348279	White	WW NW	1725/1800/1800 lm	220 mm	180 mm	10.0 W / 15.0 W	**€ 79.95**
348280	White	WW NW	2070/2160/2160 lm	280 mm	240 mm	13.0 W / 18.0 W	**€ 91.95**
348281	White	WW NW	2875/3000/3000 lm	330 mm	280 mm	18.0 W / 25.0 W	**€ 103.95**

IP54

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

BEG CCT IK10 IP54 power switch SDCM<3 UGR<22

ALTAIS 2 ROUND MOTION MS

- **Light colour adjustable in 3 stages**
- **Power adjustable in 2 levels**
- **Adjustable motion detector with corridor function**
- **Multi-master-slave configuration with up to 8 groups**
- **through-wiring possible**
- **Easy installation thanks to click system**
- **Optional surface-mounted cable entry**
- **BEG eligible**

Application Area
Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living, Retrofit / Refurbishment

Housing	Polycarbonate	Light Beam Angle	120 Degree
Colour Temperature	2700/3000/4000 K	CRI (Ra)	85
Height	52 mm	Motion Detector	Yes
Base Height	20.5 mm	IK Protection Class	IK10
Rated Input Voltage	100-240 V/AC		



348285

Article	Housing Color		Luminous Flux	Ø	Base Ø	Power Selectable	Price
348285	White	WW NW	2070/2160/2160 lm	280 mm	240 mm	13.0 W / 18.0 W	**€ 107.95**
348286	White	WW NW	2875/3000/3000 lm	330 mm	280 mm	18.0 W / 25.0 W	**€ 119.95**

IP54

Accessories

931075 Remote control for Altais 2 Motion MS **€ 19.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

UNI II

The UNI II series comprises high-quality surface-mounted luminaires and track-mounted spotlights for use on walls and ceilings in commercial and private premises.

The rotating and swivelling luminaire heads of the UNI II series – available in white and black aluminium housing versions – are equipped with warm white COB LEDs and can be folded flush onto the base if required to shine vertically downwards like a ceiling spotlight. In addition to the single, double and triple versions, both a MINI version [with smaller luminaire head and base] and a MAX version are available.

THE SERIES AT A GLANCE

UNI II
The standard version [TILT] with 3,000 K is also available with two [DOUBLE] and three [TRIPLE] luminaire heads on a base and as a wall-mounted version.

UNI II MINI
The MINI version [optionally 2,700 K or 3,000 K] is available with one [MINI II TILT] or two [MINI II DOUBLE] luminaire heads and is suitable for particularly discreet use in small rooms.

UNI II MAX
THE MAX version [3,000 K] with its 2,410 lumens also makes a big impression on its own.

UNI II
TRACK SPOT
Whether private [1-phase] or commercial [3-phase]: As a track spotlight, the UNI II can be aligned even more flexibly in the room. Available as a standard version [UNI II TILT] and as a MINI version [MINI II TILT].

UNI II
RECESSED LIGHT
The rotatable and swivelling luminaire head of the UNI II recessed luminaire [also available as a MINI and MAX version] can be folded flush onto the base if required in order to shine vertically downwards like a ceiling spotlight.

VERSATILE ACCESSORIES

THE UNI II series offers numerous options to further individualise the light and appearance of the luminaires:

reflectors
interchangeable reflectors for narrower [24°] or wider [48°] light emission

diffusers
nterchangeable diffusers for soft, asymmetric or elliptical light distribution

honeycomb filter
optional honeycomb filter to reduce glare

reflector rings
interchangeable reflector rings [black, glossy black, gold, chrome] for customising the lighting effect

Covers
Covers [white, black] as replacement or deliberate colour contrast when UNI II is opened.

Ra>90

UNI 2

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	36 Degree
Height	103 mm	Rotation Angle	350 Degree
Ø	100 mm	Swivelling Angle	90 Degree
Power	12 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Height	14.5 mm		
Base Ø	96 mm	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC		



348124

Article	Housing Color		Luminous Flux	Price
348179	Black	WW	780 lm	**€ 115.95**
348124	White	WW	835 lm	**€ 115.95**

Accessories

930305	36° reflector for Klara/Nihal Mini/Uni II series		**€ 2.95**
930306	48° reflector for Klara/Nihal Mini/Uni II series		**€ 6.95**
930307	Honeycomb filter for Klara/Nihal Mini/Uni II series		**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930334	Rear white cover for Uni II series		**€ 2.95**
930335	Rear black cover for Uni II series		**€ 2.45**
930336	White heat sink cover for Uni II series		**€ 2.95**
930337	Black heat sink cover for Uni II series		**€ 6.45**
930338	Reflector ring white for Uni II series		**€ 9.95**
930339	Reflector ring black for Uni II series		**€ 8.95**
930340	Reflector ring gold for Uni II series		**€ 8.95**
930341	Reflector ring chrome for Uni II series		**€ 8.95**

page 122

page 389

Ra>90

UNI 2 DOUBLE

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Length	212 mm	Light Beam Angle	36 Degree
Width	100 mm	Rotation Angle	350 Degree
Height	103 mm	Swivelling Angle	90 Degree
Power	20 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	212 mm		
Base Width	20 mm	CRI (Ra)	90
Base Height	14 mm		


348125

Article	Housing Color		Luminous Flux	Price
348175	Black	WW	1440 lm	**€ 207.95**
348125	White	WW	1730 lm	**€ 207.95**

Accessories

930305	36° reflector for Klara/Nihal Mini/Uni II series		**€ 2.95**
930306	48° reflector for Klara/Nihal Mini/Uni II series		**€ 6.95**
930307	Honeycomb filter for Klara/Nihal Mini/Uni II series		**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930334	Rear white cover for Uni II series		**€ 2.95**
930335	Rear black cover for Uni II series		**€ 2.45**
930336	White heat sink cover for Uni II series		**€ 2.95**
930337	Black heat sink cover for Uni II series		**€ 6.45**
930338	Reflector ring white for Uni II series		**€ 9.95**
930339	Reflector ring black for Uni II series		**€ 8.95**
930340	Reflector ring gold for Uni II series		**€ 8.95**
930341	Reflector ring chrome for Uni II series		**€ 8.95**

page 122

page 389

Ra>90

UNI 2 TRIPLE

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Height	14.5 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Length	324 mm	Power Supply Unit incl.	Yes
Width	100 mm	Light Beam Angle	36 Degree
Height	103 mm	Rotation Angle	350 Degree
Ø	100 mm	Swivelling Angle	90 Degree
Power	30 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	315 mm		
Base Width	25 mm	CRI (Ra)	90



348107

Article	Housing Color		Luminous Flux	Price
348210	Black	WW	2150 lm	**€ 295.95**
348107	White	WW	2420 lm	**€ 295.95**

Accessories

930305	36° reflector for Klara/Nihal Mini/Uni II series		**€ 2.95**
930306	48° reflector for Klara/Nihal Mini/Uni II series		**€ 6.95**
930307	Honeycomb filter for Klara/Nihal Mini/Uni II series		**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Uni II series		**€ 6.95**
930334	Rear white cover for Uni II series		**€ 2.95**
930335	Rear black cover for Uni II series		**€ 2.45**
930336	White heat sink cover for Uni II series		**€ 2.95**
930337	Black heat sink cover for Uni II series		**€ 6.45**
930338	Reflector ring white for Uni II series		**€ 9.95**
930339	Reflector ring black for Uni II series		**€ 8.95**
930340	Reflector ring gold for Uni II series		**€ 8.95**
930341	Reflector ring chrome for Uni II series		**€ 8.95**

page 122

page 389

Ra>90

UNI 2 MINI

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Height	75 mm	Rotation Angle	350 Degree
Ø	91 mm	Swivelling Angle	90 Degree
Base Height	44 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Ø	75 mm		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes		



348122

Article	Housing Color	Colour Temperature	Luminous Flux	Power	EEI	Price
348234	Black	WW 2700 K	700 lm	11.3 W		**€ 103.95**
348233	White	WW 2700 K	730 lm	11.3 W		**€ 103.95**
348178	Black	WW 3000 K	540 lm	8.0 W	G	**€ 95.95**
348122	White	WW 3000 K	630 lm	8.0 W	G	**€ 95.95**

Accessories

930327	Rear black cover for Uni II Mini series	**€ 2.95**
930328	White heat sink cover for Uni II Mini series	**€ 2.95**
930329	Black heat sink cover for Uni II Mini series	**€ 2.45**
930330	Reflector ring white for Uni II Mini series	**€ 8.95**
930331	Reflector ring black for Uni II Mini series	**€ 8.95**
930332	Reflector ring gold for Uni II Mini series	**€ 8.95**
930333	Reflector ring chrome for Uni II Mini series	**€ 8.95**
930770	Reflector 24° for Uni II Mini series	**€ 8.95**
930771	Reflector 48° for Uni II Mini series	**€ 8.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

Ra>90

UNI 2 MINI DOUBLE

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	160 mm	Light Beam Angle	36 Degree
Width	75 mm	Rotation Angle	350 Degree
Height	91 mm	Swivelling Angle	90 Degree
Base Length	160 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Width	75 mm		
Base Height	44 mm	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC		



348123

Article	Housing Color	Colour Temperature	Luminous Flux	Power	EEI	Price
348236	Black	WW 2700 K	1300 lm	21.0 W		**€ 167.95**
348235	White	WW 2700 K	1400 lm	21.0 W		**€ 167.95**
348177	Black	WW 3000 K	1020 lm	15.0 W	G	**€ 159.95**
348123	White	WW 3000 K	1210 lm	15.0 W	G	**€ 159.95**

Accessories

930327	Rear black cover for Uni II Mini series		**€ 2.95**
930328	White heat sink cover for Uni II Mini series		**€ 2.95**
930329	Black heat sink cover for Uni II Mini series		**€ 2.45**
930330	Reflector ring white for Uni II Mini series		**€ 8.95**
930331	Reflector ring black for Uni II Mini series		**€ 8.95**
930332	Reflector ring gold for Uni II Mini series		**€ 8.95**
930333	Reflector ring chrome for Uni II Mini series		**€ 8.95**
930770	Reflector 24° for Uni II Mini series		**€ 8.95**
930771	Reflector 48° for Uni II Mini series		**€ 8.95**

Ra>90

UNI 2 MAX

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	36 Degree
Height	128 mm	Rotation Angle	350 Degree
Ø	125 mm	Swivelling Angle	90 Degree
Power	32 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Height	62 mm		
Base Ø	125 mm	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC		



348127

Article	Housing Color		Luminous Flux	Price
348176	Black	WW	2730 lm	**€ 199.95**
348127	White	WW	2830 lm	**€ 199.95**



Accessories

930390	24° reflector for Uni II Max	**€ 8.95**
930391	36° reflector for Uni II Max	**€ 9.95**
930392	48° reflector for Uni II Max	**€ 8.95**
930393	Rear white cover for Uni II Max series	**€ 8.95**
930394	Rear black cover for Uni II Max series	**€ 8.95**
930395	White heat sink cover for Uni II Max series	**€ 8.95**
930396	Black heat sink cover for Uni II Max series	**€ 8.95**
930397	Reflector ring white for Uni II Max series	**€ 9.95**
930398	Reflector ring black for Uni II Max series	**€ 8.95**
930399	Reflector ring gold for Uni II Max series	**€ 11.95**

page 292

CCT Ra>90 SDCM<5



LUCEA CCT

- **Incl. black reflector ring**
- **Comprehensive range of accessories for customisation**
- **Light colour adjustable in two steps**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Control	Leading-edge dimmer, Trailing-edge dimmer
Colour Temperature	3000/4000 K	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		
Light Beam Angle	36 Degree		



348153

Article	Housing Color			Luminous Flux	Height	Ø	Power	Price
348153	White	WW	NW	930/1000 lm	157 mm	65 mm	10.0 W	**€ 95.95**
348154	Black	WW	NW	930/1000 lm	157 mm	65 mm	10.0 W	**€ 95.95**
348155	White	WW	NW	1460/1500 lm	178 mm	85 mm	15.0 W	**€ 111.95**
348156	Black	WW	NW	1460/1500 lm	178 mm	85 mm	15.0 W	**€ 111.95**
348157	White	WW	NW	1930/2000 lm	178 mm	85 mm	20.0 W	**€ 127.95**
348158	Black	WW	NW	1930/2000 lm	178 mm	85 mm	20.0 W	**€ 127.95**
348159	White	WW	NW	2700/2900 lm	211 mm	100 mm	30.0 W	**€ 143.95**
348160	Black	WW	NW	2700/2900 lm	211 mm	100 mm	30.0 W	**€ 143.95**

IP20

Accessories for **348153**, **348154**

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

Accessories for **348155**, **348156**, **348157**, **348158**

930680	Lens 24° for Lucea 15/20	**€ 9.95**
930681	Lens 60° for Lucea 15/20	**€ 9.95**
930759	Reflector ring for Lucea 15/20 white	**€ 4.75**
930760	Reflector ring for Lucea 15/20 black	**€ 4.75**
930761	Reflector ring for Lucea 15/20 gold	**€ 4.75**

Accessories for **348159**, **348160**

930682	Lens 24° for Lucea 30	**€ 12.95**
930684	Lens 60° for Lucea 30	**€ 12.95**
930762	Reflector ring for Lucea 30/40 white	**€ 5.45**
930763	Reflector ring for Lucea 30/40 black	**€ 5.45**
930764	Reflector ring for Lucea 30/40 gold	**€ 5.45**

CCT Ra>90 SDCM<5

LUCEA TILT CCT

- **Incl. black reflector ring**
- **Comprehensive range of accessories for customisation**
- **Light colour adjustable in two steps**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Swivelling Angle	90 Degree
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90
Light Beam Angle	36 Degree	IK Protection Class	IK03
Rotation Angle	350 Degree		



348161

Article	Housing Color		Luminous Flux	Height	Ø	Power	Price
348161	White	WW NW	930/1000 lm	218 mm	65 mm	10.0 W	**€ 103.95**
348162	Black	WW NW	930/1000 lm	218 mm	65 mm	10.0 W	**€ 103.95**
348163	White	WW NW	1460/1500 lm	241 mm	85 mm	15.0 W	**€ 119.95**
348164	Black	WW NW	1460/1500 lm	241 mm	85 mm	15.0 W	**€ 119.95**
348165	White	WW NW	1930/2000 lm	241 mm	85 mm	20.0 W	**€ 135.95**
348166	Black	WW NW	1930/2000 lm	241 mm	85 mm	20.0 W	**€ 135.95**
348167	White	WW NW	2700/2900 lm	274 mm	100 mm	30.0 W	**€ 151.95**
348168	Black	WW NW	2700/2900 lm	274 mm	100 mm	30.0 W	**€ 151.95**

IP20

Accessories for **348161**, **348162**

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

Accessories for **348163**, **348164**, **348165**, **348166**

930680	Lens 24° for Lucea 15/20	**€ 9.95**
930681	Lens 60° for Lucea 15/20	**€ 9.95**
930754	Door panel for Lucea 15/20 white	**€ 18.95**
930755	Door panel for Lucea 15/20 black	**€ 18.95**
930759	Reflector ring for Lucea 15/20 white	**€ 4.75**
930760	Reflector ring for Lucea 15/20 black	**€ 4.75**
930761	Reflector ring for Lucea 15/20 gold	**€ 4.75**

Accessories for **348167**, **348168**

930677	Door panel for Lucea 30/40 white	**€ 19.95**
930678	Door panel for Lucea 30/40 black	**€ 19.95**
930682	Lens 24° for Lucea 30	**€ 12.95**
930684	Lens 60° for Lucea 30	**€ 12.95**
930762	Reflector ring for Lucea 30/40 white	**€ 5.45**
930763	Reflector ring for Lucea 30/40 black	**€ 5.45**
930764	Reflector ring for Lucea 30/40 gold	**€ 5.45**

page 26

page 400

page 404

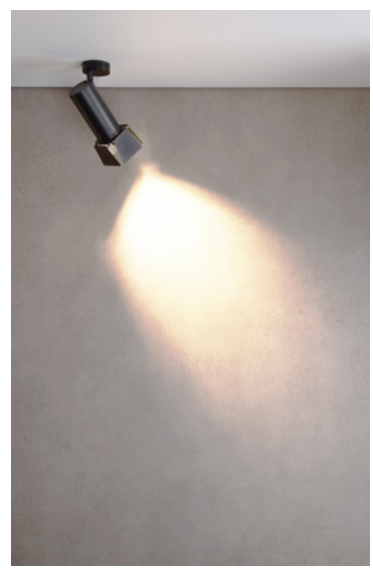

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

Ra>90 SDCM<3 UGR<16

LUCEA

- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	2700 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	157 mm		
Ø	65 mm	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		

Article	Housing Color		Luminous Flux	Power	Price
348213	White	WW	800 lm	6.0 W	**€ 95.95**
348214	Black	WW	800 lm	6.0 W	**€ 95.95**
348215	White	WW	1300 lm	10.0 W	**€ 103.95**
348216	Black	WW	1300 lm	10.0 W	**€ 103.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 28

page 296

page 297

Ra>90 SDCM<3 UGR<16

LUCEA TILT

- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	2700 K	Rotation Angle	350 Degree
Height	157 mm	Swivelling Angle	90 Degree
Ø	65 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Height	29 mm		
Base Ø	103.5 mm	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		

Article	Housing Color		Luminous Flux	Power	Price
348223	White	WW	800 lm	6.0 W	**€ 95.95**
348224	Black	WW	800 lm	6.0 W	**€ 95.95**
348225	White	WW	1300 lm	10.0 W	**€ 103.95**
348226	Black	WW	1300 lm	10.0 W	**€ 103.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 28

page 296

page 297

dtw Ra>90



LUCEA DTW

- **Dim-to-warm 1,800 K-2,700 K**
- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	1800-2700 K	Light Beam Angle	36 Degree
Luminous Flux	750 lm	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	157 mm		
Ø	65 mm	CRI (Ra)	90
Power	10 W	IK Protection Class	IK03
Rated Input Voltage	200-240 V/AC		

Article	Housing Color		Price
348237	White	WW	**€ 103.95**
348238	Black	WW	**€ 103.95**

IP20

Accessories

930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 26

page 400

page 404

dtw Ra>90

LUCEA TILT DTW

- **Dim-to-warm 1,800 K-2,700 K**
- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	1800-2700 K	Rotation Angle	350 Degree
Luminous Flux	750 lm	Swivelling Angle	90 Degree
Height	218 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm		
Power	10 W	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		

Article	Housing Color		Price
348239	White	WW	**€ 103.95**
348240	Black	WW	**€ 103.95**

IP20

Accessories

930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 26

page 400

page 404

CAN IP20

- **Can be customised with a wide range of accessories**
- **Replaceable light source to offer an individual lighting solution**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Max. Power	1x max. 7.5 W		

Article	Housing Color	Price
348241	White	**€ 23.95**
348242	Black	**€ 23.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

IP44

CAN IP44

- **customised lighting solution thanks to replaceable light source**
- **can be combined with the extensive product family of the CAN series**
- **suitable for damp rooms**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC, Hotel bathrooms / commercial wet areas

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Max. Power	1x max. 7.5 W		

Article	Housing Color	Price
348243	White	**€ 27.95**
348244	Black	**€ 27.95**

GU10 IP44

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Can series	**€ 3.95**
930366	Reflector ring silver for Klara/Nihal Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Can series	**€ 3.95**

page 30

page 167

page 182

page 184

page 383

page 467

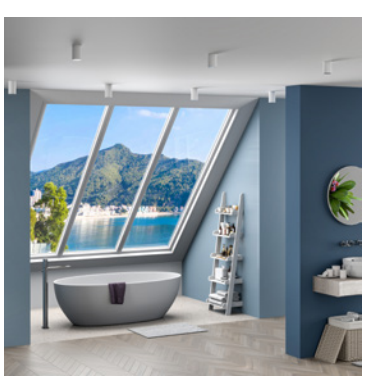

CAN TILT SQUARE

The square CAN surface-mounted ceiling light provides a flexible lighting solution for commercial and private spaces. Available as a one-, two- and three-luminaire variant in the colours black and white, it enables precise alignment of the light using rotating and swivelling luminous elements. The widely used GU10 base enables quick and simple replacement of the lamp, while the screw-on cylinder housing enables tool-free access. Installation for rigid and flexible conductors is easy and efficient due to the integrated push terminals. The CAN surface-mounted ceiling light is part of a versatile series, which also contains pendant, wall, reading and outdoor lights.

page 30

page 167

page 182

page 184

CAN TILT SQUARE

- **Flat and discreet lamp base**
- **Can be customised with a wide range of accessories**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	125 mm	Control	Dimmable via optional light source
Ø	60 mm		
Base Width	90 mm	Rotation Angle	350 Degree
Base Height	15 mm	Swivelling Angle	90 Degree

Article	Housing Color	Base Length	Max. Power	Price
348245	White	110 mm	1x max. 7.5 W	**€ 35.95**
348246	Black	110 mm	1x max. 7.5 W	**€ 35.95**
348247	White	305 mm	2x max. 7.5 W	**€ 67.95**
348248	Black	305 mm	2x max. 7.5 W	**€ 67.95**
348249	White	480 mm	3x max. 7.5 W	**€ 99.95**
348250	Black	480 mm	3x max. 7.5 W	**€ 99.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

CAN TILT ROUND

The round CAN surface-mounted ceiling light provides a flexible lighting solution for commercial and private spaces. Available as a one-, two- and three-luminaire variant in the colours black and white, it enables precise alignment of the light using rotating and swivelling luminous elements. The widely used GU10 base enables quick and simple replacement of the lamp, while the screw-on cylinder housing enables tool-free access. Installation for rigid and flexible conductors is easy and efficient due to the integrated push terminals. The CAN surface-mounted ceiling light is part of a versatile series, which also contains pendant, wall, reading and outdoor lights.

page 30

page 167

page 182

page 184

CAN TILT ROUND

- **Flat and discreet lamp base**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be customised with a wide range of accessories**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Control	Dimmable via optional light source
Height	125 mm	Rotation Angle	350 Degree
Ø	60 mm	Swivelling Angle	90 Degree
Base Height	15 mm		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Base Ø	Max. Power	Price
348251	White	80 mm	1x max. 7.5 W	**€ 35.95**
348252	Black	80 mm	1x max. 7.5 W	**€ 35.95**
348253	White	200 mm	2x max. 7.5 W	**€ 67.95**
348254	Black	200 mm	2x max. 7.5 W	**€ 67.95**
348255	White	250 mm	3x max. 7.5 W	**€ 95.95**
348256	Black	250 mm	3x max. 7.5 W	**€ 95.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

CAN MIX'N MATCH

The new CAN series is the all-round solution for both private and commercial use – more extensive than ever before! Whether pendant light, ceiling light, wall light, reading light, track light, table and floor lamp, or outdoor luminaire – CAN is available in numerous variants and feels at home almost anywhere: living rooms, hotel rooms, restaurants, or garden areas.

With the new Mix'n Match variant – available for almost every type of luminaire – CAN can now be designed even more individually and adapted to different environments. The modular principle includes base, cylinder housing, and reflector ring as well as individual accessories, which, however, do not affect the look of the luminaire itself.

1. **choose BASE**
   Define the CAN luminaire type:
   ceiling light, wall light, floor lamp, etc.
2. **select CYLINDER HOUSING**
   The cylinder housing is available in six different colours:
   black, white, dark grey, brass, bronze, rose gold.
3. **add REFLECTOR RING**
   Combine the reflector ring colour-matched to the cylinder housing or create a deliberate contrast.
4. **ACCESSORIES [optional]**
   If desired, the CAN can be complemented with a honeycomb filter or a special lens.

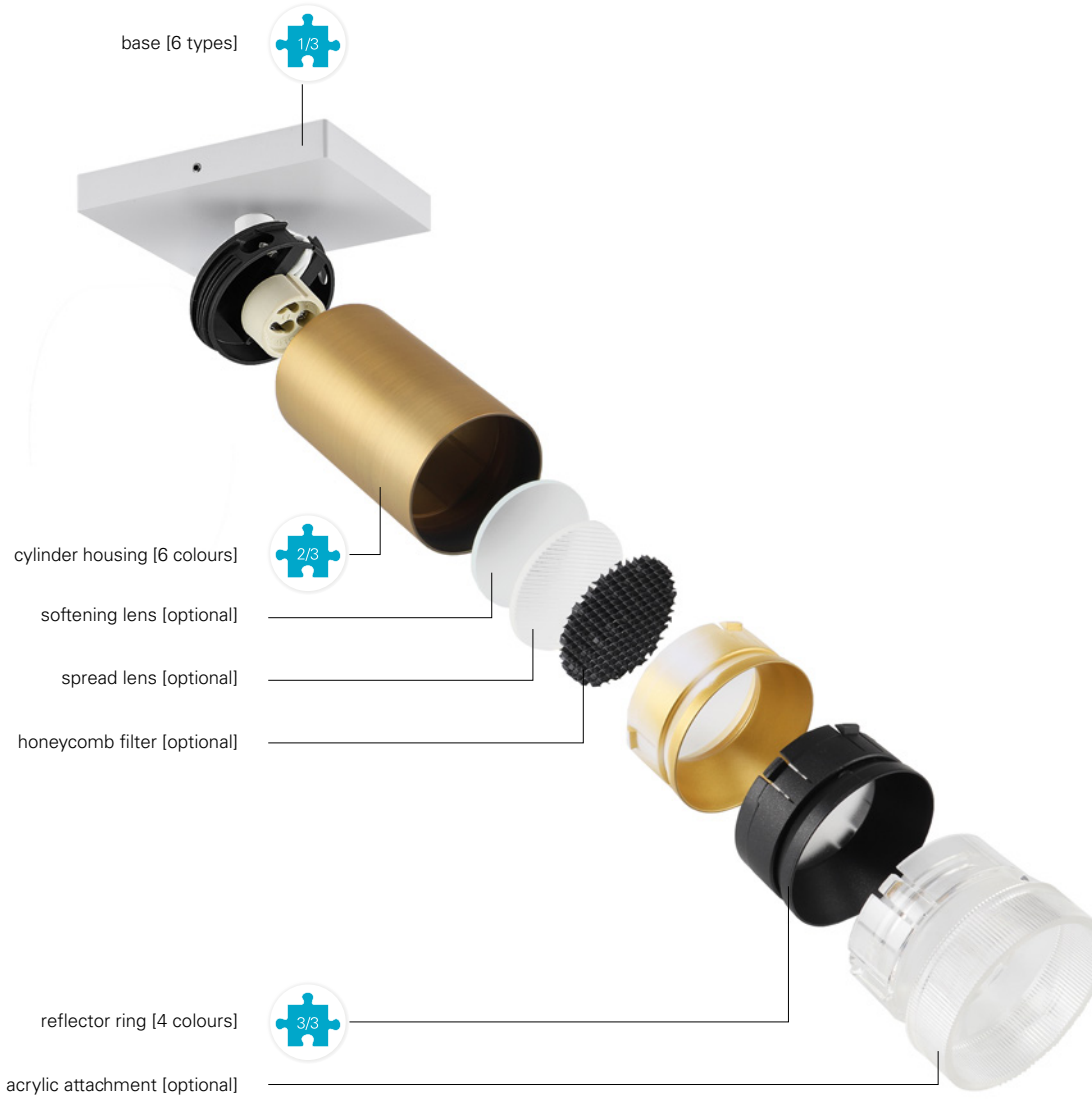

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

CAN TILT SQUARE BASE MIX'N MATCH 1/3

- **flat and discreet luminaire base**
- **can be customised with cylinder housing in 6 different colours**

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Width	90 mm	Control	Dimmable via optional light source
Height	58 mm		
Base Width	90 mm	Rotation Angle	350 Degree
Base Height	15 mm	Swivelling Angle	90 Degree

Article	Housing Color	Length	Base Length	Max. Power	Price
348264	White	110 mm	110 mm	1x max. 7.5 W	**€ 29.95**
348265	Black	110 mm	110 mm	1x max. 7.5 W	**€ 29.95**
348266	White	305 mm	305 mm	2x max. 7.5 W	**€ 55.95**
348267	Black	305 mm	305 mm	2x max. 7.5 W	**€ 55.95**
348268	White	480 mm	480 mm	3x max. 7.5 W	**€ 79.95**
348269	Black	480 mm	480 mm	3x max. 7.5 W	**€ 79.95**

GU10 IP20

CAN TILT ROUND BASE MIX'N MATCH 1/3

Housing	Aluminium	Control	Dimmable via optional light source
Height	58 mm		
Base Height	15 mm	Rotation Angle	350 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree

Article	Housing Color	Ø	Base Ø	Max. Power	Price
348270	White	80 mm	80 mm	1x max. 7.5 W	**€ 29.95**
348271	Black	80 mm	80 mm	1x max. 7.5 W	**€ 29.95**
348272	White	200 mm	200 mm	2x max. 7.5 W	**€ 54.95**
348273	Black	200 mm	200 mm	2x max. 7.5 W	**€ 54.95**
348274	White	250 mm	250 mm	3x max. 7.5 W	**€ 79.95**
348275	Black	250 mm	250 mm	3x max. 7.5 W	**€ 79.95**

GU10 IP20

2/3

CYLINDER HOOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	98 mm		

Article	Housing Color	Price
931053	White	**€ 6.45**
931054	Black	**€ 6.45**
931055	Bronze	**€ 14.95**
931056	Brass	**€ 14.95**
931057	Black grey	**€ 14.95**
931058	Rosé	**€ 14.95**

IP20

3/3

REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 3.95**
930302	Black	**€ 3.95**
930303	Gold	**€ 3.95**
930366	Silver	**€ 3.95**

IP20

BENGALA ROUND

- **Exchangeable lamp**
- **Can be rotated and swivelled**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	120 mm	Control	Dimmable via optional light source
Ø	96 mm	Swivelling Angle	30 Degree
Base Ø	96 mm		
Max. Power	1x max. 50 W		

Article	Housing Color	Price
122416	Silver	**€ 35.95**
348022	Black	**€ 35.95**
348023	White	**€ 35.95**

BENGALA SQUARE

- **Exchangeable lamp**
- **Can be rotated and swivelled**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Max. Power	1x max. 50 W
Length	96 mm	Rated Input Voltage	220-240 V/AC
Width	96 mm	Control	Dimmable via optional light source
Height	120 mm		
Base Length	96 mm	Swivelling Angle	30 Degree
Base Width	96 mm		

Article	Housing Color	Price
122417	Silver	**€ 35.95**
348024	Black	**€ 35.95**
348025	White	**€ 35.95**

PRO OFFICE SANO

PRO OFFICE SANO series ceiling lights are an efficient solution for renovating and modernising old T5/T8 louver lights. Due to slightly larger dimensions, the lights cover the old installations and so do not require the ceiling to be repainted.
Arrestor cables, plug connectors and mounting brackets make installation so easy that it can be performed by one person. In addition to ease of installation, the series offers impressive technical highlights: It provides flexible light control via CCT switch (3,000 K / 3,500 K / 4,000 K), dimmable variants (leading-edge/trailing-edge or DALI) and output adjustment in four stages (TRIAC variants only). They are also eligible for BEG German federal funding for energy-efficient buildings and emergency power capable.

BEG CCT power switch Ra>90 SDCM<3 UGR<19

PRO OFFICE SANO

- **Renovation solution for T5/T8 louver lights**
- **Uniform illumination**
- **Covers the old installation, therefore no repainting necessary**
- **Easy to install due to plug connector, arrestor cables and mounting bracket**
- **Light colour adjustable in three levels**
- **Output adjustable in four levels [TRIAC variants only]**
- **Microprismatic surface structure**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [176-280 V/DC EOFI: 95 %]**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65 [L65<=3,000 cd/m²]**

Application Area
Office / conference, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium, Stainless steel	Light Beam Angle	90 Degree
Colour Temperature	3000/3500/4000 K	Control	Trailing-edge dimmer, Leading-edge dimmer
Height	48 mm	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		



348258

Article	Housing Color		Luminous Flux	Length	Width	Power Selectable	EEI	Price
348258	White	WW NW	4200/4500/4400 lm	625 mm	625 mm	27.0 / 30.0 / 33.0 / 35.0 W	E	**€ 151.95**
348259	White	WW NW	4350/4600/4500 lm	1225 mm	325 mm	27.0 / 30.0 / 32.0 / 35.0 W	F	**€ 167.95**
348260	White	WW NW	5200/5500/5400 lm	1525 mm	325 mm	32.0 / 35.5 / 38.0 / 42.0 W	E	**€ 183.95**

IP40 EL 05

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.



3000K
4000K

BEG CCT DALI Ra>90 SDCM<3 UGR<19

PRO OFFICE SANO DALI

- **Renovation solution for T5/T8 louver lights**
- **uniform illumination**
- **Covers the old installation, therefore no repainting necessary**
- **Easy to install due to plug connector, arrestor cables and mounting bracket**
- **Light colour adjustable in three levels**
- **Output adjustable in four levels [TRIAC variants only]**
- **Microprismatic surface structure**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [176-280 V/DC EOFI: 95 %]**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65 [L65<=3,000 cd/m²]**

Application Area
Office / conference, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium, Stainless steel	Light Beam Angle	90 Degree
Colour Temperature	3000/3500/4000 K	Control	DALI 2 / DT6, Intelli Push-Dim
Height	48 mm	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		



348261

Article	Housing Color		Luminous Flux	Length	Width	Power	Price
348261	☐ White	WW NW	4400/4700/4600 lm	625 mm	625 mm	35.0 W	**€ 191.95**
348262	☐ White	WW NW	4200/4500/4400 lm	1225 mm	325 mm	34.0 W	**€ 175.95**
348263	☐ White	WW NW	5300/5600/5500 lm	1525 mm	325 mm	42.0 W	**€ 207.95**

IP40 EL 05 A↑G F

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

built in ceiling lights

page 86

page 87

page 88

page 89

page 92

page 98

page 104

page 105

page 106

page 108

page 113

page 120

page 122

SAMSOLA ROUND

- **Suitable for GU10/GU5.3 sockets [sold separately]**
- **Lamps are easy to install due to click lock**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Cut Out Ø	68 mm
Height	23 mm	Control	Dimmable via optional light source
Ø	82 mm		
Installation Depth	100 mm	Swivelling Angle	30 Degree

Article	Housing Color	Surface	Price
110039	White	Matt	**€ 7.95**
110042	Aluminium	Matt	**€ 7.95**
110041	Silver	Shiny	**€ 7.95**
110040	Silver	Brushed	**€ 7.95**
110038	Copper	Brushed	**€ 7.95**
110043	Black	Matt	**€ 7.95**

Accessories

100204	Socket GU10 with spacer	**€ 3.25**
100200	Socket GU5.3 with 15 cm cable	**€ 0.75**
829063	Safety spacer	**€ 3.45**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

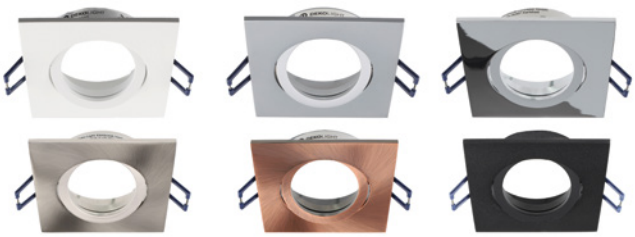

SAMSOLA SQUARE

- **Suitable for GU10/GU5.3 sockets [sold separately]**
- **Lamps are easy to install due to click lock**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Cut Out Ø	68 mm
Length	85 mm	Control	Dimmable via optional light source
Width	85 mm		
Height	23 mm	Swivelling Angle	30 Degree
Installation Depth	100 mm		

Article	Housing Color	Surface	Price
110045	White	Matt	**€ 7.95**
110048	Aluminium	Matt	**€ 7.95**
110047	Silver	Shiny	**€ 7.95**
110046	Silver	Brushed	**€ 7.95**
110044	Copper	Brushed	**€ 7.95**
110049	Black	Matt	**€ 7.95**



Accessories

100204	Socket GU10 with spacer	**€ 3.25**
100200	Socket GU5.3 with 15 cm cable	**€ 0.75**
829063	Safety spacer	**€ 3.45**
930972	Reducing ring square 130/70 mm, Traffic white	**€ 7.95**
931048	Reducing ring square 130/70 mm, Signal white	**€ 7.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

SAMSOLA MAX ROUND

- **Suitable for GU10 / GU5.3 sockets [sold separately]**
- **Easy installation of the light sources thanks to click lock**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Cut Out Ø	68-80 mm
Height	23 mm	Control	Dimmable via optional light source
Ø	95 mm		
Installation Depth	100 mm	Swivelling Angle	30 Degree

Article	Housing Color	Surface	Price
110051	White	Brushed	**€ 9.95**
110054	Aluminium	Matt	**€ 9.95**
110053	Silver	Shiny	**€ 9.95**
110052	Silver	Brushed	**€ 9.95**
110050	Copper	Brushed	**€ 9.95**
110055	Black	Matt	**€ 9.95**

Accessories

100204	Socket GU10 with spacer	**€ 3.25**
100200	Socket GU5.3 with 15 cm cable	**€ 0.75**
829063	Safety spacer	**€ 3.45**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

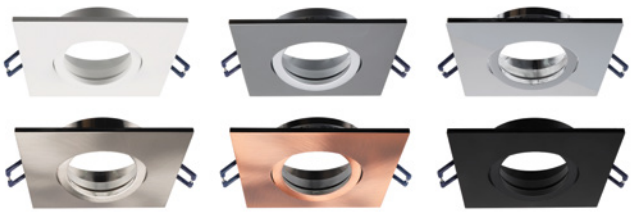

SAMSOLA MAX SQUARE

- **Suitable for GU10 / GU5.3 sockets [sold separately]**
- **Easy installation of the light sources thanks to click lock**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Cut Out Ø	68-80 mm
Length	95 mm	Control	Dimmable via optional light source
Width	95 mm		
Height	23 mm	Swivelling Angle	30 Degree
Installation Depth	100 mm		

Article	Housing Color	Surface	Price
110057	White	Matt	**€ 9.95**
110060	Aluminium	Matt	**€ 9.95**
110059	Silver	Shiny	**€ 9.95**
110058	Silver	Brushed	**€ 9.95**
110056	Copper	Brushed	**€ 9.95**
110061	Black	Matt	**€ 9.95**

Accessories

100204	Socket GU10 with spacer	**€ 3.25**
100200	Socket GU5.3 with 15 cm cable	**€ 0.75**
829063	Safety spacer	**€ 3.45**
930972	Reducing ring square 130/70 mm, Traffic white	**€ 7.95**
931048	Reducing ring square 130/70 mm, Signal white	**€ 7.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

ARKTUR

- **Replaceable lamp [GU5.3/MR16]**
- **Swivel-mounted**
- **Dimmable**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Cut Out Ø	85 mm
Height	43 mm	Control	Dimmable via optional light source
Ø	93 mm	Swivelling Angle	30 Degree
Max. Power	1x max. 35 W		
Rated Input Voltage	12 V/AC/DC		

Article	Housing Color	Price
110019	☐ White	**€ 12.95**

IP65

ALTAIR

- **Replaceable lamp [GU5.3/MR16]**
- **Dimmable**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium	Rated Input Voltage	12 V/AC/DC
Height	35 mm	Cut Out Ø	68 mm
Ø	85 mm	Control	Dimmable via optional light source
Installation Depth	33 mm		
Max. Power	1x max. 35 W		

Article	Housing Color	Price
110017	White	**€ 9.95**

CV | MR16 GU5,3 | IP65

Accessories

930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

CAN ROUND

The CAN recessed spotlight round offers a flexible lighting solution for commercial and private spaces. Available as a single and double-lamp version in black and white, it enables precise alignment of the light thanks to the rotatable and swiveling light body. The widely used GU10 base makes it easy to replace the light source quickly and the screw-on cylinder housing enables tool-free access. Thanks to the integrated plug-in terminals, installation for rigid and flexible cables is simple and efficient. The CAN surface-mounted ceiling luminaire is part of a versatile series that also includes pendant, wall, reading and outdoor luminaires.

CAN ROUND

- **Customised lighting solution thanks to replaceable light source**
- **can be customised with cylinder housing in 5 different colours**
- **can be combined with the extensive product family of the CAN series**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Cut Out Ø	51 mm
Height	98 mm	Control	Dimmable via optional light source
Ø	60 mm		
Installation Depth	40 mm	Rotation Angle	350 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree

Article	Housing Color	Length	Max. Power	Cut Out Length	Price
565755	White		1x max. 7.5 W		**€ 26.95**
565756	Black		1x max. 7.5 W		**€ 26.95**
565757	White	160 mm	2x max. 7.5 W	100 mm	**€ 55.95**
565758	Black	160 mm	2x max. 7.5 W	100 mm	**€ 55.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

REDUCING RINGS

The renovation rings for recessed luminaires provide a practical solution for covering oversized ceiling cut-outs. Available in different sizes, they offer flexible adaptation to various cut-out dimensions and enable a clean retrofit of existing installations. The rings are suitable for suspended ceilings with a thickness of 3 to 30 mm and are ideal for recessed luminaires with mounting springs. Installation is quick and can often be carried out without tools.

REDUCING RINGS FOR RECESSED LIGHTS

- **Renovation solution for excessively large ceiling cut-outs**
- **Flexible adaptation to ceiling cut-outs**
- **suitable for 3-30 mm thick hollow ceilings**
- **toolless installation possible**

Housing	Metal	Installation Depth	41 mm
Height	1.7 mm		

Article	Housing Color	Length	Width	Ø	Cut Out Ø	Inner diameter	Price
930967	Traffic white			130 mm	95 mm	70 mm	**€ 7.95**
931043	Signal white			130 mm	95 mm	70 mm	**€ 7.95**
930968	Traffic white			155 mm	120 mm	95 mm	**€ 9.95**
931044	Signal white			155 mm	120 mm	95 mm	**€ 9.95**
930969	Traffic white			210 mm	175 mm	135 mm	**€ 10.95**
931045	Signal white			210 mm	175 mm	135 mm	**€ 10.95**
930970	Traffic white			240 mm	205 mm	180 mm	**€ 13.95**
931046	Signal white			240 mm	205 mm	180 mm	**€ 13.95**
930971	Traffic white			280 mm	245 mm	210 mm	**€ 18.95**
931047	Signal white			280 mm	245 mm	210 mm	**€ 18.95**
930972	Traffic white	130 mm	130 mm		95 mm	70 mm	**€ 7.95**
931048	Signal white	130 mm	130 mm		95 mm	70 mm	**€ 7.95**
930973	Traffic white	155 mm	155 mm		120 mm	95 mm	**€ 9.95**
931049	Signal white	155 mm	155 mm		120 mm	95 mm	**€ 9.45**
930974	Traffic white	210 mm	210 mm		175 mm	135 mm	**€ 10.95**
931050	Signal white	210 mm	210 mm		175 mm	135 mm	**€ 10.95**
930975	Traffic white	240 mm	240 mm		205 mm	180 mm	**€ 13.95**
931051	Signal white	240 mm	240 mm		205 mm	180 mm	**€ 13.95**
930976	Traffic white	280 mm	280 mm		245 mm	210 mm	**€ 18.95**
931052	Signal white	280 mm	280 mm		245 mm	210 mm	**€ 18.95**

DIONE

The DIONE series comprises elegant recessed spotlights in aluminium housing with particularly shallow mounting depth - a real problem solver in the refurbishment sector.

The popular DIONE recessed ceiling luminaires with high-quality COB LED including reflector are housed in an aluminium casing and have a cut-out dimension of 68 mm. While the available colours white, silver, black, chrome and nickel harmonise with with almost any type of ceiling, the actual special feature of the DIONE is not visible when installed: The recessed spotlights are extremely space-saving when installed and require only 25 or 27 mm of ceiling cavity. This is where the power supply unit and the Quick connection box are located, which allows 3-pole through-wiring of several DIONE models as well as retrofitting as part of renovations.

The plug-in connector between the spotlight and the power supply unit allows installers to conveniently install the lighting equipment and connect the spotlight once the ceiling work has been completed.

The DIONE recessed spotlights are available in the light colours 2,700K, 3,000 K, 4,000 K, as a dim-to-warm version [1,800- 3,000K] and RGBW. In addition to the IP20 version, an IP44 version is also available, making the DIONE suitable for bathrooms and other damp areas indoors.

With this variety, the DIONE series offers recessed spotlights for a wide range of applications - from private homes and exhibition areas to guest areas in hotels and restaurants. Thanks to the wide selection of light colours and IP classes, the DIONE can be flexibly integrated into any environment and covers all design requirements, from a feel-good character to functional lighting.

only 25 or 27 mm ceiling cavity required

H x Ø: 41 x 82 mm [cut-out dimension 68 mm]

aluminium housing in white, silver, black, chrome and brushed nickel

reflector with 36° beam angle

high-quality COB technology with up to 800 lm

connector between spot and power supply unit for more convenient mounting

dimmable power supply unit

Quick connection box with quick-release fastener [optionally fixable with screw] for quick installation and through-wiring for flexible and rigid cables up to 2x 3x1.5mm² NYM-J

THAT'S HOW EASY IT IS

1 - Quick wiring / through-wiring on the Quick connection box due to screwless plug-in terminals

2 - quick connection box is placed over the 68 mm cut-out in the cavity

4 - connect the power supply unit to the spot using the connector

6 - The result: a compact installation with a swivelling spot, a dimmable power supply unit and the option of through-wiring in the ceiling cavity - ideal in refurbishment areas.

DIONE IP20

- **Low installation depth**
- **Incl. dimmable power supply unit and connection box**
- **Feed-through wiring possible**
- **Ideal renovation solution**
- **Light and power supply unit with intermediate connector**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Required Installation Depth	25 mm
Height	41 mm	Light Beam Angle	36 Degree
Ø	82 mm	Swivelling Angle	30 Degree
Power	8.5 W	Cut Out Ø	68 mm
Rated Input Voltage	220-240 V/AC	Control	Leading-edge dimmer, Trailing-edge dimmer
Power Supply Unit incl.	Yes		
Installation Depth	38 mm		



565355

Article	Housing Color	Colour Temperature	Luminous Flux	CRI (Ra)	Price
565375	White	WW 2700 K	750 lm	81	**€ 47.95**
565376	Silver	WW 2700 K	750 lm	81	**€ 47.95**
565377	Black	WW 2700 K	750 lm	81	**€ 47.95**
565378	Nickel	WW 2700 K	750 lm	81	**€ 47.95**
565379	Chrome	WW 2700 K	750 lm	81	**€ 47.95**
565355	White	WW 3000 K	800 lm	81	**€ 47.95**
565356	Silver	WW 3000 K	800 lm	81	**€ 47.95**
565357	Black	WW 3000 K	800 lm	81	**€ 47.95**
565371	Nickel	WW 3000 K	800 lm	81	**€ 47.95**
565372	Chrome	WW 3000 K	800 lm	81	**€ 47.95**
565358	White	NW 4000 K	800 lm	84	**€ 47.95**
565359	Silver	NW 4000 K	800 lm	84	**€ 47.95**
565360	Black	NW 4000 K	800 lm	84	**€ 47.95**
565373	Nickel	NW 4000 K	800 lm	84	**€ 47.95**
565374	Chrome	NW 4000 K	800 lm	84	**€ 47.95**



Accessories

930863	60° reflector for Dione	**€ 4.95**
930864	Frosted diffusing lens for Dione	**€ 2.25**
829063	Safety spacer	**€ 3.45**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

DIONE IP20 DTW

- **Low installation depth**
- **Incl. dimmable power supply unit and connection box**
- **Feed-through wiring possible**
- **Ideal renovation solution**
- **Light and power supply unit with intermediate connector**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	38 mm
Colour Temperature	1800-3000 K	Required Installation Depth	25 mm
Luminous Flux	480 lm	Light Beam Angle	36 Degree
Height	41 mm	Swivelling Angle	30 Degree
Ø	82 mm	Cut Out Ø	68 mm
Power	8.5 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	95



565380

Article	Housing Color		Price
565380	White	WW	**€ 55.95**
565381	Silver	WW	**€ 55.95**
565382	Black	WW	**€ 55.95**
565383	Chrome	WW	**€ 55.95**
565384	Nickel	WW	**€ 55.95**



Accessories

930863	60° reflector for Dione	**€ 4.95**
930864	Frosted diffusing lens for Dione	**€ 2.25**
829063	Safety spacer	**€ 3.45**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

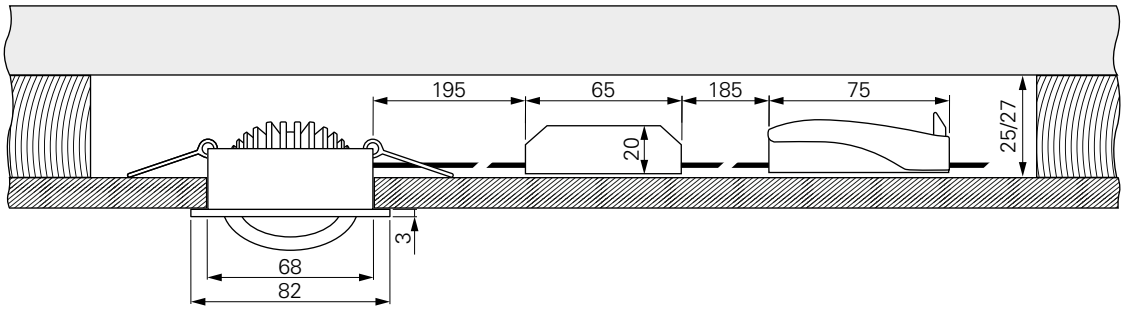

DIONE IP44

- **Low installation depth**
- **Splash-proof [downwards after installation]**
- **Incl. dimmable power supply unit and connection box**
- **Feed-through wiring possible**
- **Ideal renovation solution**
- **Light and power supply unit with intermediate connector**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium	Required Installation Depth	27 mm
Height	44 m	Light Beam Angle	36 Degree
Ø	82 mm	Swivelling Angle	30 Degree
Power	8.5 W	Cut Out Ø	68 mm
Rated Input Voltage	220-240 V/AC	Control	Leading-edge dimmer, Trailing-edge dimmer
Power Supply Unit incl.	Yes		
Installation Depth	41 mm		



565388

Article	Housing Color	Colour Temperature	Luminous Flux	CRI (Ra)	Price
565388	White	WW 2700 K	750 lm	81	**€ 51.95**
565389	Silver	WW 2700 K	750 lm	81	**€ 51.95**
565390	Black	WW 2700 K	750 lm	81	**€ 51.95**
565391	Chrome	WW 2700 K	750 lm	81	**€ 51.95**
565392	Nickel	WW 2700 K	750 lm	81	**€ 51.95**
565393	White	WW 3000 K	800 lm	81	**€ 51.95**
565394	Silver	WW 3000 K	800 lm	81	**€ 51.95**
565395	Black	WW 3000 K	800 lm	81	**€ 51.95**
565396	Chrome	WW 3000 K	800 lm	81	**€ 51.95**
565397	Nickel	WW 3000 K	800 lm	81	**€ 51.95**
565398	White	NW 4000 K	800 lm	84	**€ 51.95**
565399	Silver	NW 4000 K	800 lm	84	**€ 51.95**
565400	Black	NW 4000 K	800 lm	84	**€ 51.95**
565401	Chrome	NW 4000 K	800 lm	84	**€ 51.95**
565402	Nickel	NW 4000 K	800 lm	84	**€ 51.95**



Accessories

930863	60° reflector for Dione	**€ 4.95**
930864	Frosted diffusing lens for Dione	**€ 2.25**
829063	Safety spacer	**€ 3.45**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

dtw IP44 Ra>90 SDCM<5

DIONE IP44 DTW

- **Low installation depth**
- **Splash-proof [downwards after installation]**
- **Incl. dimmable power supply unit and connection box**
- **Feed-through wiring possible**
- **Ideal renovation solution**
- **Light and power supply unit with intermediate connector**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium	Installation Depth	41 mm
Colour Temperature	1800-3000 K	Required Installation Depth	27 mm
Luminous Flux	480 lm	Light Beam Angle	36 Degree
Height	44 mm	Swivelling Angle	30 Degree
Ø	82 mm	Cut Out Ø	68 mm
Power	8.5 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	95



565403

Article	Housing Color		Price
565403	White	WW	**€ 59.95**
565404	Silver	WW	**€ 59.95**
565405	Black	WW	**€ 59.95**
565406	Chrome	WW	**€ 59.95**
565407	Nickel	WW	**€ 59.95**

IP20 IP44 A↑G F

Accessories

930863	60° reflector for Dione	**€ 4.95**
930864	Frosted diffusing lens for Dione	**€ 2.25**
829063	Safety spacer	**€ 3.45**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

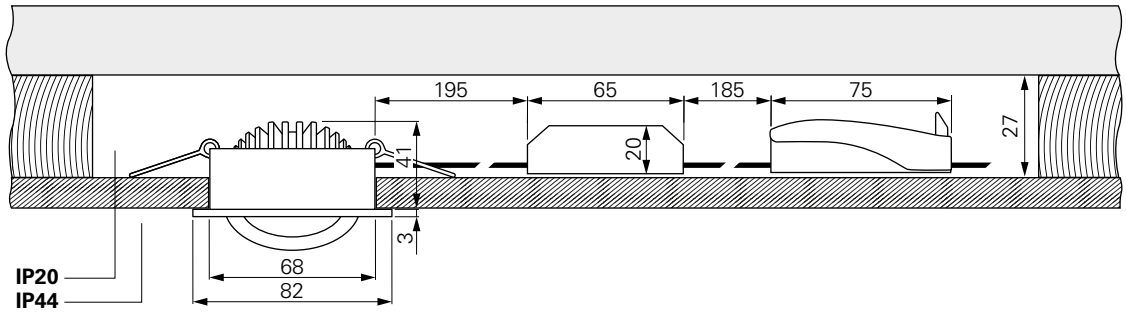

IP44 Ra>90 RGBWW

DIONE, IP44, RGBW

- **Low installation depth**
- **splash-proof [downwards when installed**
- **suitable for 24V colour controls**
- **can be combined with all Dione recessed spotlights**
- **high-quality RGBW COB technology**
- **RGB 3x 3W, WW 1x 6W, max. possible total output 9W**
- **homogeneous colour mixing**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium	Installation Depth	41 mm
Colour Temperature	3000 K	Required Installation Depth	27 mm
Luminous Flux	540 lm	Light Beam Angle	36 Degree
Height	41 mm	Swivelling Angle	30 Degree
Ø	82 mm	Cut Out Ø	68 mm
Power	9 W	Control	Dimmable via optional controller
Rated Input Voltage	24 V/DC		
Power Supply Unit incl.	No	CRI (Ra)	90

Article	Housing Color		Price
565450	White	RGB WW	**€ 59.95**
565451	Light grey	RGB WW	**€ 59.95**
565452	Black	RGB WW	**€ 59.95**
565453	Chrome	RGB WW	**€ 59.95**
565454	Nickel	RGB WW	**€ 59.95**

CV | IP20 | IP44 | 4 CH

Accessories

843542	RF-smart, Starter-Set RGB/W/CCT, 12-48V, 20A incl. Remote, IP20	**€ 91.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)	**€ 143.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 79.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 75.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8	**€ 75.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 91.95**
862234	FLAT, CV, UT 24 V/20 W	**€ 20.95**
862122	FLAT, CV, UT 24 V/50 W	**€ 41.95**
862126	LONG-FLAT, CV, LT-100-24	**€ 77.95**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

CCT IK06 IP44 Ra>90

SURTUR

- **Integrated power supply unit**
- **through-wiring possible**
- **Light colour adjustable in 3 steps**
- **Very high colour rendering**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Colour Temperature	2700/3000/4000 K	Control	Trailing-edge dimmer, Leading-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90
Light Beam Angle	40 Degree	Accumulator/Battery Operated	No
Swivelling Angle	30 Degree	IK Protection Class	IK06



565455

Article	Housing Color		Luminous Flux	Housing	Ø cut out	Height	Ø	Power	Price
565455	White	WW NW	520/600/510 lm	Polycarbonate	68-75 mm	44 mm	85 mm	6.0 W	**€ 19.95**
565456	Black	WW NW	520/600/510 lm	Polycarbonate	68-75 mm	44 mm	85 mm	6.0 W	**€ 19.95**
565457	White	WW NW	900/1000/1000 lm	Polycarbonate / PA - Polyamide	83-95 mm	72 mm	105 mm	9.0 W	**€ 25.95**
565458	Black	WW NW	900/1000/1000 lm	Polycarbonate / PA - Polyamide	83-95 mm	72 mm	105 mm	9.0 W	**€ 25.95**

IP20 IP44

Accessories for **565455**, **565456**

930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

Accessories for **565457**, **565458**

930968	Reducing ring round 155/95 mm, Traffic white	**€ 9.95**
931044	Reducing ring round 155/95 mm, Signal white	**€ 9.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

dtw IK06 IP44 Ra>90



SURTUR DTW

- **Integrated power supply unit**
- **Feed-through wiring possible**
- **Adjustable light colour - dim to warm**
- **Very high colour rendering**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Colour Temperature	1800-2700 K	Control	Trailing-edge dimmer, Leading-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	Accumulator/Battery Operated	No
Light Beam Angle	40 Degree	IK Protection Class	IK06
Swivelling Angle	30 Degree		



565459

Article	Housing Color		Luminous Flux	Housing	Ø cut out	Height	Ø	Power	Price
565459	White	WW	230/430 lm	Polycarbonate	68-75 mm	44 mm	85 mm	6.0 W	**€ 22.95**
565460	Black	WW	230/430 lm	Polycarbonate	68-75 mm	44 mm	85 mm	6.0 W	**€ 22.95**
565461	White	WW	360/720 lm	Polycarbonate / PA - Polyamide	83-95 mm	72 mm	105 mm	9.0 W	**€ 29.95**
565462	Black	WW	360/720 lm	Polycarbonate / PA - Polyamide	83-95 mm	72 mm	105 mm	9.0 W	**€ 29.95**

IP20 IP44

Accessories for **565459**, **565460**

930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

Accessories for **565461**, **565462**

930968	Reducing ring round 155/95 mm, Traffic white	**€ 9.95**
931044	Reducing ring round 155/95 mm, Signal white	**€ 9.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

SMD-68-230V-ROUND

Plenty of power for less! SMD-68 series recessed lights deliver up to 550 lm and also have an integrated, dimmable power supply (230 V direct connection), which makes the use of GU10 holders and retrofitted equipment redundant.

SMD-68-230V-ROUND

- **Integrated power supply unit**
- **Swivel-mounted**
- **Low installation depth**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Plastic	Light Beam Angle	45 Degree
Height	43.8 mm	Swivelling Angle	36 Degree
Ø	85 mm	Cut Out Ø	68 mm
Power	6.5 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	80
Installation Depth	41.3 mm		



565337

Article	Housing Color	Colour Temperature	Luminous Flux	EEI	Price
565337	White	WW 2700 K	510 lm	G	**€ 15.95**
565385	Black	WW 2700 K	510 lm	G	**€ 15.95**
565338	White	WW 3000 K	540 lm	F	**€ 15.95**
565386	Black	WW 3000 K	540 lm	F	**€ 15.95**
565339	White	NW 4000 K	550 lm	G	**€ 15.95**
565387	Black	NW 4000 K	550 lm	G	**€ 15.95**

Accessories

930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

CCT hcl

COB 68 HCL

- **Suitable for 24 V HCL controllers**
- **Swivel-mounted**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	60 mm
Colour Temperature	2500-6500 K	Light Beam Angle	65 Degree
Luminous Flux	534 lm	Swivelling Angle	25 Degree
Height	46 mm	Cut Out Ø	68 mm
Ø	78 mm	Control	Dimmable via optional controller
Power	8 W		
Rated Input Voltage	24 V/DC	CRI (Ra)	80
Power Supply Unit incl.	No		



565193

Article	Housing Color	Colour Temperature	Price
565193	White	WW CW 2500-6500 K	**€ 52.95**

CV | IP20 | 2 CH | A ↑ G | G

Accessories

829063	Safety spacer		**€ 3.45**
862234	FLAT, CV, UT 24 V/20 W		**€ 20.95**
862168	BASIC, CV, Q8H-24-150 W		**€ 103.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 79.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 7.95**

CCT hcl

COB 95 HCL

- **suitable for 24V HCL control**
- **swivelling**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	70 mm
Colour Temperature	2500-6500 K	Light Beam Angle	65 Degree
Luminous Flux	1118 lm	Swivelling Angle	25 Degree
Height	65 mm	Cut Out Ø	95 mm
Ø	108 mm	Control	Dimmable via optional controller
Power	16 W		
Rated Input Voltage	24 V/DC	CRI (Ra)	80
Power Supply Unit incl.	No		



565194

Article	Housing Color	Colour Temperature	Price
565194	White	WW CW 2500-6500 K	**€ 87.95**

CV | IP20 | 2 CH | A ↑ G | G

Accessories

829063	Safety spacer		**€ 3.45**
862233	FLAT, CV, UT 24 V/12 W		**€ 17.95**
862166	BASIC, CV, Q8H-24-100 W		**€ 77.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 79.95**
930968	Reducing ring round 155/95 mm, Traffic white		**€ 9.95**
931044	Reducing ring round 155/95 mm, Signal white		**€ 9.95**

TARVOS

The TARVOS series offers a well-designed LED downlight portfolio for professional indoor lighting solutions. The name of each luminaire directly refers to the cut-out diameter in millimeters – TARVOS 68, 100, 150, or 240. This allows the models to be planned quickly and precisely into existing or new ceiling cut-outs. All TARVOS recessed spotlights are suitable for emergency power operation, feature a round housing, and are available in several variants that differ in housing colour, light colour, beam angle, and control [see list]. This enables precise and individual adaptation of the lighting effect to the respective application – from pinpoint accentuation to wide, diffuse general lighting.

Overview of variants

- housing colour: black, light grey, white
- colour temperature: 2700K, 3000K, 4000K
- beam angle: 15°, 30°, 45°
- control: DALI 2.0, DT6, push dim

The TARVOS series meets the requirements for BEG funding (Federal Funding for Efficient Buildings]. Combined with its high energy efficiency and long-lasting LED technology, the recessed spotlights thus present a future-proof solution from both economic and ecological perspectives – especially for refurbishment projects in existing buildings. The range covers offices, corridors and stairwells, retail and gastronomy areas, as well as public facilities.

TARVOS

The TARVOS series offers a well-designed LED downlight portfolio for professional indoor lighting solutions. The name of each luminaire directly refers to the cut-out diameter in millimeters – TARVOS 68, 100, 150, or 240. This allows the models to be planned quickly and precisely into existing or new ceiling cut-outs. All TARVOS recessed spotlights are suitable for emergency power operation, feature a round housing, and are available in several variants that differ in housing colour, light colour, beam angle, and control (see list). This enables precise and individual adaptation of the lighting effect to the respective application – from pinpoint accentuation to wide, diffuse general lighting.

Note: Please note that the TARVOS series are project items that are not available from stock. The delivery time is approx. 6 weeks.

TARVOS

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK05

IP20

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

TARVOS 68

Ø x H					Cut Out Ø						Colour temperature				Dimmable	Housing Color			Light Beam Angle				
85 x 86 mm	115 x 75 mm	165 x 113 mm	205 x 144 mm	255 x 160 mm	68 mm	100 mm	150 mm	190 mm	240 mm	Power rating	2700 K	3000 K	4000 K	Luminous flux	DALI 2.0 / DT6 / Push-Dim	white	light grey	black	15°	30°	45°	Article	Price
x					x					7.2 W	x			860 lm				x	x			**565463**	**€ 136.95**
x					x					7.2 W	x			860 lm				x		x		**565464**	**€ 136.95**
x					x					7.2 W	x			860 lm				x			x	**565465**	**€ 136.95**
x					x					7.2 W	x			860 lm			x		x			**565466**	**€ 136.95**
x					x					7.2 W	x			860 lm			x			x		**565467**	**€ 136.95**
x					x					7.2 W	x			860 lm			x				x	**565468**	**€ 136.95**
x					x					7.2 W	x			860 lm		x			x			**565469**	**€ 136.95**
x					x					7.2 W	x			860 lm		x				x		**565470**	**€ 136.95**
x					x					7.2 W	x			860 lm		x					x	**565471**	**€ 136.95**
x					x					7.2 W	x			860 lm	x			x	x			**565472**	**€ 186.95**
x					x					7.2 W	x			860 lm	x			x		x		**565473**	**€ 186.95**
x					x					7.2 W	x			860 lm	x			x			x	**565474**	**€ 186.95**
x					x					7.2 W	x			860 lm	x		x		x			**565475**	**€ 186.95**
x					x					7.2 W	x			860 lm	x		x			x		**565476**	**€ 186.95**
x					x					7.2 W	x			860 lm	x		x				x	**565477**	**€ 186.95**
x					x					7.2 W	x			860 lm	x	x			x			**565478**	**€ 186.95**
x					x					7.2 W	x			860 lm	x	x				x		**565479**	**€ 186.95**
x					x					7.2 W	x			860 lm	x	x					x	**565480**	**€ 186.95**
x					x					7.2 W		x		870 lm				x	x			**565481**	**€ 136.95**
x					x					7.2 W		x		870 lm				x		x		**565482**	**€ 136.95**
x					x					7.2 W		x		870 lm				x			x	**565483**	**€ 136.95**
x					x					7.2 W		x		870 lm			x		x			**565484**	**€ 136.95**
x					x					7.2 W		x		870 lm			x			x		**565485**	**€ 136.95**
x					x					7.2 W		x		870 lm			x				x	**565486**	**€ 136.95**
x					x					7.2 W		x		870 lm		x			x			**565487**	**€ 136.95**
x					x					7.2 W		x		870 lm		x				x		**565488**	**€ 136.95**
x					x					7.2 W		x		870 lm		x					x	**565489**	**€ 136.95**
x					x					7.2 W		x		870 lm	x			x	x			**565490**	**€ 186.95**
x					x					7.2 W		x		870 lm	x			x		x		**565491**	**€ 186.95**
x					x					7.2 W		x		870 lm	x			x			x	**565492**	**€ 186.95**
x					x					7.2 W		x		870 lm	x		x		x			**565493**	**€ 186.95**
x					x					7.2 W		x		870 lm	x		x			x		**565494**	**€ 186.95**
x					x					7.2 W		x		870 lm	x		x				x	**565495**	**€ 186.95**
x					x					7.2 W		x		870 lm	x	x			x			**565496**	**€ 186.95**
x					x					7.2 W		x		870 lm	x	x				x		**565497**	**€ 186.95**
x					x					7.2 W		x		870 lm	x	x					x	**565498**	**€ 186.95**
x					x					7.2 W			x	905 lm				x	x			**565499**	**€ 136.95**
x					x					7.2 W			x	905 lm				x		x		**565500**	**€ 136.95**
x					x					7.2 W			x	905 lm				x			x	**565501**	**€ 136.95**
x					x					7.2 W			x	905 lm			x		x			**565502**	**€ 136.95**
x					x					7.2 W			x	905 lm			x			x		**565503**	**€ 136.95**
x					x					7.2 W			x	905 lm			x				x	**565504**	**€ 136.95**
x					x					7.2 W			x	905 lm		x			x			**565505**	**€ 136.95**
x					x					7.2 W			x	905 lm		x				x		**565506**	**€ 136.95**
x					x					7.2 W			x	905 lm		x					x	**565507**	**€ 136.95**
x					x					7.2 W			x	905 lm	x			x	x			**565508**	**€ 186.95**
x					x					7.2 W			x	905 lm	x			x		x		**565509**	**€ 186.95**
x					x					7.2 W			x	905 lm	x			x			x	**565510**	**€ 186.95**
x					x					7.2 W			x	905 lm	x		x		x			**565511**	**€ 186.95**
x					x					7.2 W			x	905 lm	x		x			x		**565512**	**€ 186.95**
x					x					7.2 W			x	905 lm	x		x				x	**565513**	**€ 186.95**
x					x					7.2 W			x	905 lm	x	x			x			**565514**	**€ 186.95**
x					x					7.2 W			x	905 lm	x	x				x		**565515**	**€ 186.95**
x					x					7.2 W			x	905 lm	x	x					x	**565516**	**€ 186.95**

TARVOS 100

Ø x H					Cut Out Ø						Colour temperature				Dimmable	Housing Color			Light Beam Angle				
85 x 86 mm	115 x 75 mm	165 x 113 mm	205 x 144 mm	255 x 160 mm	68 mm	100 mm	150 mm	190 mm	240 mm	Power rating	2700 K	3000 K	4000 K	Luminous flux	DALI 2.0 / DT6 / Push-Dim	white	light grey	black	15°	30°	45°	Article	Price
	x					x				10.8 W	x			1290 lm				x	x			**565517**	**€ 152.95**
	x					x				10.8 W	x			1290 lm				x		x		**565518**	**€ 152.95**
	x					x				10.8 W	x			1290 lm				x			x	**565519**	**€ 152.95**
	x					x				10.8 W	x			1290 lm			x		x			**565520**	**€ 152.95**
	x					x				10.8 W	x			1290 lm			x			x		**565521**	**€ 152.95**
	x					x				10.8 W	x			1290 lm			x				x	**565522**	**€ 152.95**
	x					x				10.8 W	x			1290 lm		x			x			**565523**	**€ 152.95**
	x					x				10.8 W	x			1290 lm		x				x		**565524**	**€ 152.95**
	x					x				10.8 W	x			1290 lm		x					x	**565525**	**€ 152.95**
	x					x				10.8 W	x			1290 lm	x			x	x			**565526**	**€ 201.95**
	x					x				10.8 W	x			1290 lm	x			x		x		**565527**	**€ 201.95**
	x					x				10.8 W	x			1290 lm	x			x			x	**565528**	**€ 201.95**
	x					x				10.8 W	x			1290 lm	x		x		x			**565529**	**€ 201.95**
	x					x				10.8 W	x			1290 lm	x		x			x		**565530**	**€ 201.95**
	x					x				10.8 W	x			1290 lm	x		x				x	**565531**	**€ 201.95**
	x					x				10.8 W	x			1290 lm	x	x			x			**565532**	**€ 201.95**
	x					x				10.8 W	x			1290 lm	x	x				x		**565533**	**€ 201.95**
	x					x				10.8 W	x			1290 lm	x	x					x	**565534**	**€ 201.95**
	x					x				10.8 W		x		1310 lm				x	x			**565535**	**€ 152.95**
	x					x				10.8 W		x		1310 lm				x		x		**565536**	**€ 152.95**
	x					x				10.8 W		x		1310 lm				x			x	**565537**	**€ 152.95**
	x					x				10.8 W		x		1310 lm			x		x			**565538**	**€ 152.95**
	x					x				10.8 W		x		1310 lm			x			x		**565539**	**€ 152.95**
	x					x				10.8 W		x		1310 lm			x				x	**565540**	**€ 152.95**
	x					x				10.8 W		x		1310 lm		x			x			**565541**	**€ 152.95**
	x					x				10.8 W		x		1310 lm		x				x		**565542**	**€ 152.95**
	x					x				10.8 W		x		1310 lm		x					x	**565543**	**€ 152.95**
	x					x				10.8 W		x		1310 lm	x			x	x			**565544**	**€ 201.95**
	x					x				10.8 W		x		1310 lm	x			x		x		**565545**	**€ 201.95**
	x					x				10.8 W		x		1310 lm	x			x			x	**565546**	**€ 201.95**
	x					x				10.8 W		x		1310 lm	x		x		x			**565547**	**€ 201.95**
	x					x				10.8 W		x		1310 lm	x		x			x		**565548**	**€ 201.95**
	x					x				10.8 W		x		1310 lm	x		x				x	**565549**	**€ 201.95**
	x					x				10.8 W		x		1310 lm	x	x			x			**565550**	**€ 201.95**
	x					x				10.8 W		x		1310 lm	x	x				x		**565551**	**€ 201.95**
	x					x				10.8 W		x		1310 lm	x	x					x	**565552**	**€ 201.95**
	x					x				10.8 W			x	1360 lm				x	x			**565553**	**€ 152.95**
	x					x				10.8 W			x	1360 lm				x		x		**565554**	**€ 152.95**
	x					x				10.8 W			x	1360 lm				x			x	**565555**	**€ 152.95**
	x					x				10.8 W			x	1360 lm			x		x			**565556**	**€ 152.95**
	x					x				10.8 W			x	1360 lm			x			x		**565557**	**€ 152.95**
	x					x				10.8 W			x	1360 lm			x				x	**565558**	**€ 152.95**
	x					x				10.8 W			x	1360 lm		x			x			**565559**	**€ 152.95**
	x					x				10.8 W			x	1360 lm		x				x		**565560**	**€ 152.95**
	x					x				10.8 W			x	1360 lm		x					x	**565561**	**€ 152.95**
	x					x				10.8 W			x	1360 lm	x			x	x			**565562**	**€ 201.95**
	x					x				10.8 W			x	1360 lm	x			x		x		**565563**	**€ 201.95**
	x					x				10.8 W			x	1360 lm	x			x			x	**565564**	**€ 201.95**
	x					x				10.8 W			x	1360 lm	x		x		x			**565565**	**€ 201.95**
	x					x				10.8 W			x	1360 lm	x		x			x		**565566**	**€ 201.95**
	x					x				10.8 W			x	1360 lm	x		x				x	**565567**	**€ 201.95**
	x					x				10.8 W			x	1360 lm	x	x			x			**565568**	**€ 201.95**
	x					x				10.8 W			x	1360 lm	x	x				x		**565569**	**€ 201.95**
	x					x				10.8 W			x	1360 lm	x	x					x	**565570**	**€ 201.95**

TARVOS 150

Ø x H					Cut Out Ø						Colour temperature				Dimmable	Housing Color			Light Beam Angle				
85 x 86 mm	115 x 75 mm	165 x 113 mm	205 x 144 mm	255 x 160 mm	68 mm	100 mm	150 mm	190 mm	240 mm	Power rating	2700 K	3000 K	4000 K	Luminous flux	DALI 2.0 / DT6 / Push-Dim	white	light grey	black	15°	30°	45°	Article	Price
		x					x			14.4 W	x			1720 lm				x	x			**565571**	**€ 177.95**
		x					x			14.4 W	x			1720 lm				x		x		**565572**	**€ 177.95**
		x					x			14.4 W	x			1720 lm				x			x	**565573**	**€ 177.95**
		x					x			14.4 W	x			1720 lm			x		x			**565574**	**€ 177.95**
		x					x			14.4 W	x			1720 lm			x			x		**565575**	**€ 177.95**
		x					x			14.4 W	x			1720 lm			x				x	**565576**	**€ 177.95**
		x					x			14.4 W	x			1720 lm		x			x			**565577**	**€ 177.95**
		x					x			14.4 W	x			1720 lm		x				x		**565578**	**€ 177.95**
		x					x			14.4 W	x			1720 lm		x					x	**565579**	**€ 177.95**
		x					x			14.4 W	x			1720 lm	x			x	x			**565580**	**€ 226.95**
		x					x			14.4 W	x			1720 lm	x			x		x		**565581**	**€ 226.95**
		x					x			14.4 W	x			1720 lm	x			x			x	**565582**	**€ 226.95**
		x					x			14.4 W	x			1720 lm	x		x		x			**565583**	**€ 226.95**
		x					x			14.4 W	x			1720 lm	x		x			x		**565584**	**€ 226.95**
		x					x			14.4 W	x			1720 lm	x		x				x	**565585**	**€ 226.95**
		x					x			14.4 W	x			1720 lm	x	x			x			**565586**	**€ 226.95**
		x					x			14.4 W	x			1720 lm	x	x				x		**565587**	**€ 226.95**
		x					x			14.4 W	x			1720 lm	x	x					x	**565588**	**€ 226.95**
		x					x			14.4 W		x		1750 lm				x	x			**565589**	**€ 177.95**
		x					x			14.4 W		x		1750 lm				x		x		**565590**	**€ 177.95**
		x					x			14.4 W		x		1750 lm				x			x	**565591**	**€ 177.95**
		x					x			14.4 W		x		1750 lm			x		x			**565592**	**€ 177.95**
		x					x			14.4 W		x		1750 lm			x			x		**565593**	**€ 177.95**
		x					x			14.4 W		x		1750 lm			x				x	**565594**	**€ 177.95**
		x					x			14.4 W		x		1750 lm		x			x			**565595**	**€ 177.95**
		x					x			14.4 W		x		1750 lm		x				x		**565596**	**€ 177.95**
		x					x			14.4 W		x		1750 lm		x					x	**565597**	**€ 177.95**
		x					x			14.4 W		x		1750 lm	x			x	x			**565598**	**€ 226.95**
		x					x			14.4 W		x		1750 lm	x			x		x		**565599**	**€ 226.95**
		x					x			14.4 W		x		1750 lm	x			x			x	**565600**	**€ 226.95**
		x					x			14.4 W		x		1750 lm	x		x		x			**565601**	**€ 226.95**
		x					x			14.4 W		x		1750 lm	x		x			x		**565602**	**€ 226.95**
		x					x			14.4 W		x		1750 lm	x		x				x	**565603**	**€ 226.95**
		x					x			14.4 W		x		1750 lm	x	x			x			**565604**	**€ 226.95**
		x					x			14.4 W		x		1750 lm	x	x				x		**565605**	**€ 226.95**
		x					x			14.4 W		x		1750 lm	x	x					x	**565606**	**€ 226.95**
		x					x			14.4 W			x	1810 lm				x	x			**565607**	**€ 177.95**
		x					x			14.4 W			x	1810 lm				x		x		**565608**	**€ 177.95**
		x					x			14.4 W			x	1810 lm				x			x	**565609**	**€ 177.95**
		x					x			14.4 W			x	1810 lm			x		x			**565610**	**€ 177.95**
		x					x			14.4 W			x	1810 lm			x			x		**565611**	**€ 177.95**
		x					x			14.4 W			x	1810 lm			x				x	**565612**	**€ 177.95**
		x					x			14.4 W			x	1810 lm		x			x			**565613**	**€ 177.95**
		x					x			14.4 W			x	1810 lm		x				x		**565614**	**€ 177.95**
		x					x			14.4 W			x	1810 lm		x					x	**565615**	**€ 177.95**
		x					x			14.4 W			x	1810 lm	x			x	x			**565616**	**€ 226.95**
		x					x			14.4 W			x	1810 lm	x			x		x		**565617**	**€ 226.95**
		x					x			14.4 W			x	1810 lm	x			x			x	**565618**	**€ 226.95**
		x					x			14.4 W			x	1810 lm	x		x		x			**565619**	**€ 226.95**
		x					x			14.4 W			x	1810 lm	x		x			x		**565620**	**€ 226.95**
		x					x			14.4 W			x	1810 lm	x		x				x	**565621**	**€ 226.95**
		x					x			14.4 W			x	1810 lm	x	x			x			**565622**	**€ 226.95**
		x					x			14.4 W			x	1810 lm	x	x				x		**565623**	**€ 226.95**
		x					x			14.4 W			x	1810 lm	x	x					x	**565624**	**€ 226.95**

TARVOS 190

Ø x H					Cut Out Ø						Colour temperature				Dimmable	Housing Color			Light Beam Angle				
85 x 86 mm	115 x 75 mm	165 x 113 mm	205 x 144 mm	255 x 160 mm	68 mm	100 mm	150 mm	190 mm	240 mm	Power rating	2700 K	3000 K	4000 K	Luminous flux	DALI 2.0 / DT6 / Push-Dim	white	light grey	black	15°	30°	45°	Article	Price
			x					x		21.6 W	x			1590 lm				x	x			**565625**	**€ 191.95**
			x					x		21.6 W	x			1590 lm				x		x		**565626**	**€ 191.95**
			x					x		21.6 W	x			1590 lm				x			x	**565627**	**€ 191.95**
			x					x		21.6 W	x			1590 lm			x		x			**565628**	**€ 191.95**
			x					x		21.6 W	x			1590 lm			x			x		**565629**	**€ 191.95**
			x					x		21.6 W	x			1590 lm			x				x	**565630**	**€ 191.95**
			x					x		21.6 W	x			1590 lm		x			x			**565631**	**€ 191.95**
			x					x		21.6 W	x			1590 lm		x				x		**565632**	**€ 191.95**
			x					x		21.6 W	x			1590 lm		x					x	**565633**	**€ 191.95**
			x					x		21.6 W	x			1590 lm	x			x	x			**565634**	**€ 242.95**
			x					x		21.6 W	x			1590 lm	x			x		x		**565635**	**€ 242.95**
			x					x		21.6 W	x			1590 lm	x			x			x	**565636**	**€ 242.95**
			x					x		21.6 W	x			1590 lm	x		x		x			**565637**	**€ 242.95**
			x					x		21.6 W	x			1590 lm	x		x			x		**565638**	**€ 242.95**
			x					x		21.6 W	x			1590 lm	x		x				x	**565639**	**€ 242.95**
			x					x		21.6 W	x			1590 lm	x	x			x			**565640**	**€ 242.95**
			x					x		21.6 W	x			1590 lm	x	x				x		**565641**	**€ 242.95**
			x					x		21.6 W	x			1590 lm	x	x					x	**565642**	**€ 242.95**
			x					x		21.6 W		x		2630 lm				x	x			**565643**	**€ 191.95**
			x					x		21.6 W		x		2630 lm				x		x		**565644**	**€ 191.95**
			x					x		21.6 W		x		2630 lm				x			x	**565645**	**€ 191.95**
			x					x		21.6 W		x		2630 lm			x		x			**565646**	**€ 191.95**
			x					x		21.6 W		x		2630 lm			x			x		**565647**	**€ 191.95**
			x					x		21.6 W		x		2630 lm			x				x	**565648**	**€ 191.95**
			x					x		21.6 W		x		2630 lm		x			x			**565649**	**€ 191.95**
			x					x		21.6 W		x		2630 lm		x				x		**565650**	**€ 191.95**
			x					x		21.6 W		x		2630 lm		x					x	**565651**	**€ 191.95**
			x					x		21.6 W		x		2630 lm	x			x	x			**565652**	**€ 242.95**
			x					x		21.6 W		x		2630 lm	x			x		x		**565653**	**€ 242.95**
			x					x		21.6 W		x		2630 lm	x			x			x	**565654**	**€ 242.95**
			x					x		21.6 W		x		2630 lm	x		x		x			**565655**	**€ 242.95**
			x					x		21.6 W		x		2630 lm	x		x			x		**565656**	**€ 242.95**
			x					x		21.6 W		x		2630 lm	x		x				x	**565657**	**€ 242.95**
			x					x		21.6 W		x		2630 lm	x	x			x			**565658**	**€ 242.95**
			x					x		21.6 W		x		2630 lm	x	x				x		**565659**	**€ 242.95**
			x					x		21.6 W		x		2630 lm	x	x					x	**565660**	**€ 242.95**
			x					x		21.6 W			x	2720 lm				x	x			**565661**	**€ 191.95**
			x					x		21.6 W			x	2720 lm				x		x		**565662**	**€ 191.95**
			x					x		21.6 W			x	2720 lm				x			x	**565663**	**€ 191.95**
			x					x		21.6 W			x	2720 lm			x		x			**565664**	**€ 191.95**
			x					x		21.6 W			x	2720 lm			x			x		**565665**	**€ 191.95**
			x					x		21.6 W			x	2720 lm			x				x	**565666**	**€ 191.95**
			x					x		21.6 W			x	2720 lm		x			x			**565667**	**€ 191.95**
			x					x		21.6 W			x	2720 lm		x				x		**565668**	**€ 191.95**
			x					x		21.6 W			x	2720 lm		x					x	**565669**	**€ 191.95**
			x					x		21.6 W			x	2720 lm	x			x	x			**565670**	**€ 242.95**
			x					x		21.6 W			x	2720 lm	x			x		x		**565671**	**€ 242.95**
			x					x		21.6 W			x	2720 lm	x			x			x	**565672**	**€ 242.95**
			x					x		21.6 W			x	2720 lm	x		x		x			**565673**	**€ 242.95**
			x					x		21.6 W			x	2720 lm	x		x			x		**565674**	**€ 242.95**
			x					x		21.6 W			x	2720 lm	x		x				x	**565675**	**€ 242.95**
			x					x		21.6 W			x	2720 lm	x	x			x			**565676**	**€ 242.95**
			x					x		21.6 W			x	2720 lm	x	x				x		**565677**	**€ 242.95**
			x					x		21.6 W			x	2720 lm	x	x					x	**565678**	**€ 242.95**

TARVOS 240

Ø x H					Cut Out Ø						Colour temperature				Dimmable	Housing Color			Light Beam Angle				
85 x 86 mm	115 x 75 mm	165 x 113 mm	205 x 144 mm	255 x 160 mm	68 mm	100 mm	150 mm	190 mm	240 mm	Power rating	2700 K	3000 K	4000 K	Luminous flux	DALI 2.0 / DT6 / Push-Dim	white	light grey	black	15°	30°	45°	Article	Price
				x					x	25.2 W	x			3020 lm				x	x			**565679**	**€ 226.95**
				x					x	25.2 W	x			3020 lm				x		x		**565680**	**€ 226.95**
				x					x	25.2 W	x			3020 lm				x			x	**565681**	**€ 226.95**
				x					x	25.2 W	x			3020 lm			x		x			**565682**	**€ 226.95**
				x					x	25.2 W	x			3020 lm			x			x		**565683**	**€ 226.95**
				x					x	25.2 W	x			3020 lm			x				x	**565684**	**€ 226.95**
				x					x	25.2 W	x			3020 lm		x			x			**565685**	**€ 226.95**
				x					x	25.2 W	x			3020 lm		x				x		**565686**	**€ 226.95**
				x					x	25.2 W	x			3020 lm		x					x	**565687**	**€ 226.95**
				x					x	25.2 W	x			3020 lm	x			x	x			**565688**	**€ 290.95**
				x					x	25.2 W	x			3020 lm	x			x		x		**565689**	**€ 290.95**
				x					x	25.2 W	x			3020 lm	x			x			x	**565690**	**€ 290.95**
				x					x	25.2 W	x			3020 lm	x		x		x			**565691**	**€ 290.95**
				x					x	25.2 W	x			3020 lm	x		x			x		**565692**	**€ 290.95**
				x					x	25.2 W	x			3020 lm	x		x				x	**565693**	**€ 290.95**
				x					x	25.2 W	x			3020 lm	x	x			x			**565694**	**€ 290.95**
				x					x	25.2 W	x			3020 lm	x	x				x		**565695**	**€ 290.95**
				x					x	25.2 W	x			3020 lm	x	x					x	**565696**	**€ 290.95**
				x					x	25.2 W		x		3070 lm				x	x			**565697**	**€ 226.95**
				x					x	25.2 W		x		3070 lm				x		x		**565698**	**€ 226.95**
				x					x	25.2 W		x		3070 lm				x			x	**565699**	**€ 226.95**
				x					x	25.2 W		x		3070 lm			x		x			**565700**	**€ 226.95**
				x					x	25.2 W		x		3070 lm			x			x		**565701**	**€ 226.95**
				x					x	25.2 W		x		3070 lm			x				x	**565702**	**€ 226.95**
				x					x	25.2 W		x		3070 lm		x			x			**565703**	**€ 226.95**
				x					x	25.2 W		x		3070 lm		x				x		**565704**	**€ 226.95**
				x					x	25.2 W		x		3070 lm		x					x	**565705**	**€ 226.95**
				x					x	25.2 W		x		3070 lm	x			x	x			**565706**	**€ 290.95**
				x					x	25.2 W		x		3070 lm	x			x		x		**565707**	**€ 290.95**
				x					x	25.2 W		x		3070 lm	x			x			x	**565708**	**€ 290.95**
				x					x	25.2 W		x		3070 lm	x		x		x			**565709**	**€ 290.95**
				x					x	25.2 W		x		3070 lm	x		x			x		**565710**	**€ 290.95**
				x					x	25.2 W		x		3070 lm	x		x				x	**565711**	**€ 290.95**
				x					x	25.2 W		x		3070 lm	x	x			x			**565712**	**€ 290.95**
				x					x	25.2 W		x		3070 lm	x	x				x		**565713**	**€ 290.95**
				x					x	25.2 W		x		3070 lm	x	x					x	**565714**	**€ 290.95**
				x					x	25.2 W			x	3170 lm				x	x			**565715**	**€ 226.95**
				x					x	25.2 W			x	3170 lm				x		x		**565716**	**€ 226.95**
				x					x	25.2 W			x	3170 lm				x			x	**565717**	**€ 226.95**
				x					x	25.2 W			x	3170 lm			x		x			**565718**	**€ 226.95**
				x					x	25.2 W			x	3170 lm			x			x		**565719**	**€ 226.95**
				x					x	25.2 W			x	3170 lm			x				x	**565720**	**€ 226.95**
				x					x	25.2 W			x	3170 lm		x			x			**565721**	**€ 226.95**
				x					x	25.2 W			x	3170 lm		x				x		**565722**	**€ 226.95**
				x					x	25.2 W			x	3170 lm		x					x	**565723**	**€ 226.95**
				x					x	25.2 W			x	3170 lm	x			x	x			**565724**	**€ 290.95**
				x					x	25.2 W			x	3170 lm	x			x		x		**565725**	**€ 290.95**
				x					x	25.2 W			x	3170 lm	x			x			x	**565726**	**€ 290.95**
				x					x	25.2 W			x	3170 lm	x		x		x			**565727**	**€ 290.95**
				x					x	25.2 W			x	3170 lm	x		x			x		**565728**	**€ 290.95**
				x					x	25.2 W			x	3170 lm	x		x				x	**565729**	**€ 290.95**
				x					x	25.2 W			x	3170 lm	x	x			x			**565730**	**€ 290.95**
				x					x	25.2 W			x	3170 lm	x	x				x		**565731**	**€ 290.95**
				x					x	25.2 W			x	3170 lm	x	x					x	**565732**	**€ 290.95**

SLIM

Matching recessed spotlights are available for our SLIM luminaire series. The die-cast aluminium luminaire body is always the same size [300 x 39 mm]. The SLIM recessed spotlights have the standard installation dimension of 68 mm. This makes the single-flame recessed spotlights particularly suitable for sales areas, reception areas or even hotels and restaurants.

page 295 page 409

Ra>90 SDCM<3 UGR<19

SLIM

- **Glare-free, due to low UGR value (<19)**
- **Slim design with only 39 mm diameter**
- **Incl. silver-coloured reflector ring**
- **Installation diameter 68 mm**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	25 mm
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Luminous Flux	500 lm	Rotation Angle	300 Degree
Height	194 mm	Swivelling Angle	60 Degree
Ø	80 mm	Cut Out Ø	68 mm
Power	5 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90

Article	Housing Color		Price
565408	White	WW	**€ 47.95**
565409	Black	WW	**€ 47.95**

IP20

Accessories

930744	Reflector ring white for Slim series	**€ 3.95**
930745	Reflector ring black for Slim series	**€ 3.95**
930746	Reflector ring gold-coloured for Slim series	**€ 4.75**
930747	24° lens for Slim series	**€ 3.95**
930748	36° lens for Slim series	**€ 3.95**
930749	60° lens for Slim series	**€ 3.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

Ra>90

UNI 2

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	3000 K	Swivelling Angle	85 Degree
Height	84 mm	Cut Out Ø	125 mm
Ø	139 mm	Control	Dimmable via optional power supply unit
Power	12 W		
Rated Input Voltage	33-34 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No	Rated Current	350 mA
Installation Depth	90 mm		



565343

Article	Housing Color	Colour Temperature	Luminous Flux	EEI	Price
565343	White	WW 3000 K	760 lm	A G F	**€ 95.95**
565361	Black	WW 3000 K	1010 lm	A G F	**€ 95.95**

Accessories

930305	36° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 2.95**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930334	Rear white cover for Uni II series		**€ 2.95**
930335	Rear black cover for Uni II series		**€ 2.45**
930336	White heat sink cover for Uni II series		**€ 2.95**
930337	Black heat sink cover for Uni II series		**€ 6.45**
930338	Reflector ring white for Uni II series		**€ 9.95**
930339	Reflector ring black for Uni II series		**€ 8.95**
930340	Reflector ring gold for Uni II series		**€ 8.95**
930341	Reflector ring chrome for Uni II series		**€ 8.95**
180512	BASIC, CC, CC35018/18 W		**€ 18.95**
862191	BASIC, DIM, Multi CC, IE-25D		**€ 51.95**
862204	BASIC, DIM, CC, D35020UF/20 W		**€ 31.95**
930969	Reducing ring round 210/135 mm, Traffic white		**€ 10.95**
931045	Reducing ring round 210/135 mm, Signal white		**€ 10.95**

page 54

page 389

Ra>90

UNI 2 MINI

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	3000 K	Swivelling Angle	75 Degree
Height	80 mm	Cut Out Ø	95 mm
Ø	103 mm	Control	Dimmable via optional power supply unit
Power	9 W		
Rated Input Voltage	18-19 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No	Rated Current	500 mA
Installation Depth	85 mm		



565342

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565342	White	WW 3000 K	765 lm	**€ 79.95**
565354	Black	WW 3000 K	825 lm	**€ 79.95**

Accessories

930328	White heat sink cover for Uni II Mini series	**€ 2.95**
930329	Black heat sink cover for Uni II Mini series	**€ 2.45**
930330	Reflector ring white for Uni II Mini series	**€ 8.95**
930331	Reflector ring black for Uni II Mini series	**€ 8.95**
930332	Reflector ring gold for Uni II Mini series	**€ 8.95**
930333	Reflector ring chrome for Uni II Mini series	**€ 8.95**
930770	Reflector 24° for Uni II Mini series	**€ 8.95**
930771	Reflector 48° for Uni II Mini series	**€ 8.95**
180513	BASIC, CC, CC50018/18 W	**€ 18.95**
862190	BASIC, DIM, Multi CC, IE-12D	**€ 47.95**
862236	OCTO, DIM, CC, RSM-12-500T/12 W	**€ 23.95**
930968	Reducing ring round 155/95 mm, Traffic white	**€ 9.95**
931044	Reducing ring round 155/95 mm, Signal white	**€ 9.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

Ra>90

UNI 2 MAX

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	3000 K	Swivelling Angle	85 Degree
Height	97 mm	Cut Out Ø	155 mm
Ø	165 mm	Control	Dimmable via optional power supply unit
Power	24 W		
Rated Input Voltage	34-35 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No	Rated Current	700 mA
Installation Depth	100 mm		



565344

Article	Housing Color		Luminous Flux	Price
565351	Black	WW	2260 lm	**€ 119.95**
565344	White	WW	2380 lm	**€ 119.95**

CC | IP20 | A ↑ G | G

Accessories

930390	24° reflector for Uni II Max	**€ 8.95**
930391	36° reflector for Uni II Max	**€ 9.95**
930392	48° reflector for Uni II Max	**€ 8.95**
930395	White heat sink cover for Uni II Max series	**€ 8.95**
930396	Black heat sink cover for Uni II Max series	**€ 8.95**
930397	Reflector ring white for Uni II Max series	**€ 9.95**
930398	Reflector ring black for Uni II Max series	**€ 8.95**
930399	Reflector ring gold for Uni II Max series	**€ 11.95**
862192	BASIC, DIM, Multi CC, IE-45D	**€ 55.95**
862198	BASIC, CC, V8-30-700 mA/30 W	**€ 21.95**
862208	BASIC, DIM, CC, D70040NTF/40 W	**€ 37.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

downlights

page 129

page 130

page 132

page 133

page 134

page 135

page 136

page 138

page 140

power switch | CCT | IK05 | IP54 | Ra>90 | UGR<19



ACRUX PRO CCT

- **through-wiring possible**
- **Integrated power supply unit for 230V direct connection**
- **plash-proof [downwards when installed]**
- **light colour adjustable in three stages**
- **power adjustable in 3 stages (only Ø 120 / 145 / 190)**
- **BEG eligible**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium, PA - Polyamide	Control	Trailing-edge dimmer, Leading-edge dimmer
Surface	Shiny	CRI (Ra)	90
Colour Temperature	2700/3000/4000 K	Accumulator/Battery Operated	No
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK05
Light Beam Angle	100 Degree		

Article	Housing Color			Luminous Flux	Height	Ø	Power	Ø cut out	Price
565745	White	WW	NW	800/840/840 lm	50 mm	90 mm	7,0 W	68-75 mm	**€ 19.95**
565746	Black	WW	NW	800/840/840 lm	50 mm	90 mm	7,0 W	68-75 mm	**€ 19.95**
565747	White	WW	NW	1080/1130/1180 lm	55 mm	110 mm	9,0 W	82-95 mm	**€ 23.95**
565748	Black	WW	NW	1080/1130/1180 lm	55 mm	110 mm	9,0 W	82-95 mm	**€ 23.95**
565749	White	WW	NW	1800/1950/1875 lm	60 mm	145 mm	9/12/15 W	120-130 mm	**€ 27.95**
565750	Black	WW	NW	1800/1950/1875 lm	60 mm	145 mm	9/12/15 W	120-130 mm	**€ 27.95**
565751	White	WW	NW	2400/2600/2500 lm	72 mm	180 mm	12/16/20 W	145-155 mm	**€ 31.95**
565752	Black	WW	NW	2400/2600/2500 lm	72 mm	180 mm	12/16/20 W	145-155 mm	**€ 31.95**
565753	White	WW	NW	3600/3900/3750 lm	85 mm	230 mm	18/24/30 W	190-205 mm	**€ 43.95**
565754	Black	WW	NW	3600/3900/3750 lm	85 mm	230 mm	18/24/30 W	190-205 mm	**€ 43.95**

IP20 | IP54

Accessories for **565745**, **565746**

930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

Accessories for **565747**, **565748**

930968	Reducing ring round 155/95 mm, Traffic white	**€ 9.95**
931044	Reducing ring round 155/95 mm, Signal white	**€ 9.95**

Accessories for **565749**, **565750**

930969	Reducing ring round 210/135 mm, Traffic white	**€ 10.95**
931045	Reducing ring round 210/135 mm, Signal white	**€ 10.95**

Accessories for **565753**, **565754**

930971	Reducing ring round 280/210 mm, Traffic white	**€ 18.95**
931047	Reducing ring round 280/210 mm, Signal white	**€ 18.95**

ANIK ROUND

The ANIK ROUND LED downlight is a high-quality lighting solution for a wide range of applications - for example in reception areas, offices, conference rooms, shops, sales areas, hotels, the catering trade and in bathrooms and WCs. It impresses with its uniform, wide light distribution with a beam angle of 120° and very high colour rendering (Ra ≥ 90). Thanks to its IP44 downward protection rating when installed, it is also suitable for damp environments. The luminaire can be combined with external power supply units and is therefore dimmable. The ANIK ROUND series covers a wide power spectrum from 9 W to 30 W and is available in the colour temperatures 2700 K, 3000 K and 4000 K. With its flat design (19-22 mm high) and various diameters (144-398 mm), it is suitable for both new buildings and refurbishment projects.

IK05 IP44 Ra>90 SDCM<3 UGR<19

ANIK ROUND

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **uniform and wide light distribution**
- **very high colour rendering**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional power supply unit
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Rated Input Voltage	32-37 V/DC	Accumulator/Battery Operated	No
Power Supply Unit incl.	No	IK Protection Class	IK05



565410

Article	Housing Color	Colour Temp.	Luminous Flux	Rated Current	Height	Ø	Ø cut out	Power	Price
565410	White	WW 2700 K	1070 lm	260 mA	19 mm	144 mm	130 mm	9.0 W	**€ 26.95**
565413	White	WW 2700 K	1540 lm	350 mA	22 mm	173 mm	165 mm	12.0 W	**€ 38.95**
565416	White	WW 2700 K	2050 lm	500 mA	20 mm	234 mm	220 mm	17.0 W	**€ 55.95**
565419	White	WW 2700 K	4130 lm	900 mA	20 mm	398 mm	380 mm	30.0 W	**€ 78.95**
565411	White	WW 3000 K	1100 lm	260 mA	19 mm	144 mm	130 mm	9.0 W	**€ 26.95**
565414	White	WW 3000 K	1580 lm	350 mA	22 mm	173 mm	165 mm	12.0 W	**€ 38.95**
565417	White	WW 3000 K	2080 lm	500 mA	20 mm	234 mm	220 mm	17.0 W	**€ 55.95**
565420	White	WW 3000 K	4180 lm	900 mA	20 mm	398 mm	380 mm	30.0 W	**€ 78.95**
565412	White	NW 4000 K	1150 lm	260 mA	19 mm	144 mm	130 mm	9.0 W	**€ 26.95**
565415	White	NW 4000 K	1620 lm	350 mA	22 mm	173 mm	165 mm	12.0 W	**€ 38.95**
565418	White	NW 4000 K	2130 lm	500 mA	20 mm	234 mm	220 mm	17.0 W	**€ 55.95**
565421	White	NW 4000 K	4230 lm	900 mA	20 mm	398 mm	380 mm	30.0 W	**€ 78.95**

CC IP20 IP44

Accessories for **565410**, **565411**, **565412**
862285 BASIC, DIM, CC, D26012UF/12W **€ 25.95**

Accessories for **565410**, **565411**, **565412**, **565413**, **565414**, **565415**
862190 BASIC, DIM, Multi CC, IE-12D **€ 47.95**

Accessories for **565413**, **565414**, **565415**
180512 BASIC, CC, CC35018/18 W **€ 18.95**
862203 BASIC, DIM, CC, D350012UF/12 W **€ 29.95**

Accessories for **565416**, **565417**, **565418**
862191 BASIC, DIM, Multi CC, IE-25D **€ 51.95**
862205 BASIC, DIM, CC, D50020UF/20 W **€ 31.95**

Accessories for **565419**, **565420**, **565421**
862157 BASIC, CC, V8-40-900/40 W **€ 23.95**
862192 BASIC, DIM, Multi CC, IE-45D **€ 55.95**

hcl IK05 IP44 Ra>90 SDCM<3 UGR<19

ANIK ROUND HCL

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **suitable for 24V HCL control**
- **uniform and wide light distribution**
- **very high colour rendering**
- **individually combinable and dimmable with power supply**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
Surface	Powder-coated, Fine structure, Matt	Control	Dimmable via optional controller
Colour Temperature	2700-6500 K	CRI (Ra)	90
Rated Input Voltage	24 V/DC	Accumulator/Battery Operated	No
Power Supply Unit incl.	No	IK Protection Class	IK05



565422

Article	Housing Color		Luminous Flux	Height	Ø	Ø cut out	Power	Installation Depth	Price
565422	White	WW CW	850 lm	19 mm	144 mm	130 mm	9.0 W	16.5 mm	**€ 36.95**
565423	White	WW CW	1310 lm	22 mm	173 mm	165 mm	12.0 W	19.5 mm	**€ 46.95**
565424	White	WW CW	1850 lm	20 mm	234 mm	220 mm	17.0 W	17.5 mm	**€ 63.95**
565425	White	WW CW	3220 lm	20 mm	398 mm	380 mm	30.0 W	17 mm	**€ 87.95**

CV IP20 IP44

Accessories

843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 79.95**
862166	BASIC, CV, Q8H-24-100 W		**€ 77.95**
843341	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6		**€ 67.95**
843342	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8		**€ 67.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A		**€ 91.95**

Accessories for **565422**

930967	Reducing ring round 130/70 mm, Traffic white		**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 7.95**

Accessories for **565422**, **565423**

862234	FLAT, CV, UT 24 V/20 W		**€ 20.95**

Accessories for **565424**

862163	BASIC, CV, Q8H-24-40 W		**€ 37.95**

Accessories for **565425**

862122	FLAT, CV, UT 24 V/50 W		**€ 41.95**

IK05 IP44 Ra>90 RGBWW SDCM<3 UGR<19





ANIK ROUND RGBW

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **suitable for 24V colour control**
- **uniform and wide light distribution**
- **very high colour rendering**
- **individually combinable and dimmable with power supply unit**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional controller
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Colour Temperature	3000 K	Accumulator/Battery Operated	No
Rated Input Voltage	24 V/DC	IK Protection Class	IK05
Power Supply Unit incl.	No		



565426

Article	Housing Color		Luminous Flux	Height	Ø	Ø cut out	Power	Installation Depth	Price
565426	White	RGB WW	780 lm	19 mm	144 mm	130 mm	12.0 W	16.5 mm	**€ 43.95**
565427	White	RGB WW	1180 lm	22 mm	173 mm	165 mm	16.0 W	19.5 mm	**€ 54.95**
565428	White	RGB WW	1580 lm	20 mm	234 mm	220 mm	22.0 W	17.5 mm	**€ 71.95**
565429	White	RGB WW	2360 lm	20 mm	398 mm	380 mm	36.0 W	17 mm	**€ 95.95**

CV IP20 IP44

Accessories

843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 79.95**
862166	BASIC, CV, Q8H-24-100 W		**€ 77.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6		**€ 75.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8		**€ 75.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A		**€ 91.95**

Accessories for **565426**

930967	Reducing ring round 130/70 mm, Traffic white		**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 7.95**

Accessories for **565426**, **565427**

862234	FLAT, CV, UT 24 V/20 W		**€ 20.95**

Accessories for **565428**

862163	BASIC, CV, Q8H-24-40 W		**€ 37.95**

Accessories for **565429**

862122	FLAT, CV, UT 24 V/50 W		**€ 41.95**

IK05 IP44 Ra>90 SDCM<3 UGR<19

ANIK SQUARE

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **uniform and wide light distribution**
- **very high colour rendering**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional power supply unit
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Rated Input Voltage	32-37 V/DC	Accumulator/Battery Operated	No
Power Supply Unit incl.	No	IK Protection Class	IK05



565430

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Width	Height	cut out	Price
565430	White	WW 2700 K	1020 lm	110 mm	110 mm	20.5 mm	90x90 mm	**€ 26.95**
565433	White	WW 2700 K	2060 lm	180 mm	180 mm	21 mm	155x155 mm	**€ 38.95**
565436	White	WW 2700 K	2860 lm	237 mm	237 mm	21 mm	215x215 mm	**€ 55.95**
565439	White	WW 2700 K	3850 lm	398 mm	398 mm	20 mm	380x380 mm	**€ 78.95**
565431	White	WW 3000 K	1050 lm	110 mm	110 mm	20.5 mm	90x90 mm	**€ 26.95**
565434	White	WW 3000 K	2100 lm	180 mm	180 mm	21 mm	155x155 mm	**€ 38.95**
565437	White	WW 3000 K	2910 lm	237 mm	237 mm	21 mm	215x215 mm	**€ 55.95**
565440	White	WW 3000 K	3900 lm	398 mm	398 mm	20 mm	380x380 mm	**€ 78.95**
565432	White	NW 4000 K	1100 lm	110 mm	110 mm	20.5 mm	90x90 mm	**€ 26.95**
565435	White	NW 4000 K	2150 lm	180 mm	180 mm	21 mm	155x155 mm	**€ 38.95**
565438	White	NW 4000 K	2950 lm	237 mm	237 mm	21 mm	215x215 mm	**€ 55.95**
565441	White	NW 4000 K	4170 lm	398 mm	398 mm	20 mm	380x380 mm	**€ 78.95**

CC IP20 IP44

Accessories for **565430**, **565431**, **565432**
862190 BASIC, DIM, Multi CC, IE-12D **€ 47.95**
862285 BASIC, DIM, CC, D26012UF/12W **€ 25.95**

Accessories for **565433**, **565434**, **565435**
862205 BASIC, DIM, CC, D50020UF/20 W **€ 31.95**
862226 FLAT, CC, UT500 mA/20 W **€ 22.95**

Accessories for **565433**, **565434**, **565435**, **565436**, **565437**, **565438**
862191 BASIC, DIM, Multi CC, IE-25D **€ 51.95**

Accessories for **565436**, **565437**, **565438**
862198 BASIC, CC, V8-30-700 mA/30 W **€ 21.95**
862208 BASIC, DIM, CC, D70040NTF/40 W **€ 37.95**

Accessories for **565439**, **565440**, **565441**
862157 BASIC, CC, V8-40-900/40 W **€ 23.95**
862192 BASIC, DIM, Multi CC, IE-45D **€ 55.95**

hcl IK05 IP44 Ra>90 SDCM<3 UGR<19

ANIK SQUARE HCL

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **suitable for 24V HCL control**
- **uniform and wide light distribution**
- **very high colour rendering**
- **individually combinable and dimmable with power supply**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
Surface	Powder-coated, Fine structure, Matt	Control	Dimmable via optional controller
Colour Temperature	2700-6500 K	CRI (Ra)	90
Rated Input Voltage	24 V/DC	Accumulator/Battery Operated	No
Power Supply Unit incl.	No	IK Protection Class	IK05



565443

Article	Housing Color		Luminous Flux	Length	Width	Height	cut out	Power	Price
565442	White	WW CW	860 lm	110 mm	110 mm	20.5 mm	90x90 mm	9.0 W	**€ 36.95**
565443	White	WW CW	1860 lm	180 mm	180 mm	21 mm	155x155 mm	17.0 W	**€ 46.95**
565444	White	WW CW	2620 lm	237 mm	237 mm	21 mm	215x215 mm	24.0 W	**€ 63.95**
565445	White	WW CW	3290 lm	398 mm	398 mm	20 mm	380x380 mm	30.0 W	**€ 87.95**

CV IP20 IP44

Accessories

843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 79.95**
862166	BASIC, CV, Q8H-24-100 W		**€ 77.95**
843341	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6		**€ 67.95**
843342	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8		**€ 67.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A		**€ 91.95**

Accessories for **565442**

862234	FLAT, CV, UT 24 V/20 W		**€ 20.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 7.95**

Accessories for **565443**, **565444**

862163	BASIC, CV, Q8H-24-40 W		**€ 37.95**

Accessories for **565445**

862122	FLAT, CV, UT 24 V/50 W		**€ 41.95**

IK05 IP44 Ra>90 RGBWW SDCM<3 UGR<19

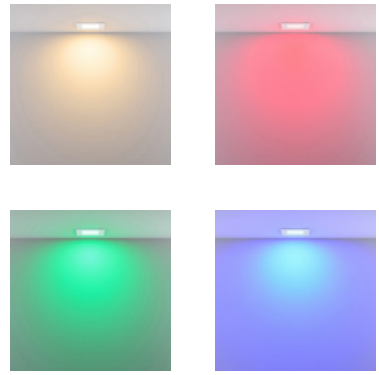

ANIK SQUARE RGBW

- **splash-proof [downwards when installed]**
- **suitable for 24V colour control**
- **uniform and wide light distribution**
- **very high colour rendering**
- **can be individually combined and dimmed with power supply unit**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional controller
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Colour Temperature	3000 K	Accumulator/Battery Operated	No
Rated Input Voltage	24 V/DC	IK Protection Class	IK05
Power Supply Unit incl.	No		

Article	Housing Color		Luminous Flux	Length	Width	Height	cut out	Power	Price
565446	White	RGB WW	960 lm	110 mm	110 mm	20.5 mm	90x90 mm	14.0 W	**€ 43.95**
565447	White	RGB WW	1510 lm	180 mm	180 mm	21 mm	155x155 mm	23.0 W	**€ 54.95**
565448	White	RGB WW	2010 lm	237 mm	237 mm	21 mm	215x215 mm	30.0 W	**€ 71.95**
565449	White	RGB WW	2410 lm	398 mm	398 mm	20 mm	380x380 mm	37.0 W	**€ 95.95**

CV IP20 IP44

Accessories

843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 79.95**
862166	BASIC, CV, Q8H-24-100 W	**€ 77.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 75.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8	**€ 75.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)	**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A	**€ 91.95**

Accessories for **565446**

862234	FLAT, CV, UT 24 V/20 W	**€ 20.95**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 7.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 7.95**

Accessories for **565447**, **565448**

862163	BASIC, CV, Q8H-24-40 W	**€ 37.95**

Accessories for **565449**

862122	FLAT, CV, UT 24 V/50 W	**€ 41.95**

REDUCING RINGS FOR RECESSED LIGHTS

- **Renovation solution for excessively large ceiling cut-outs**
- **Flexible adaptation to ceiling cut-outs**
- **suitable for 3-30 mm thick hollow ceilings**
- **toolless installation possible**

Housing	Metal	Installation Depth	41 mm
Height	1.7 mm		

Article	Housing Color	Length	Width	Ø	Cut Out Ø	Inner diameter	Price
930967	Traffic white			130 mm	95 mm	70 mm	**€ 7.95**
931043	Signal white			130 mm	95 mm	70 mm	**€ 7.95**
930968	Traffic white			155 mm	120 mm	95 mm	**€ 9.95**
931044	Signal white			155 mm	120 mm	95 mm	**€ 9.95**
930969	Traffic white			210 mm	175 mm	135 mm	**€ 10.95**
931045	Signal white			210 mm	175 mm	135 mm	**€ 10.95**
930970	Traffic white			240 mm	205 mm	180 mm	**€ 13.95**
931046	Signal white			240 mm	205 mm	180 mm	**€ 13.95**
930971	Traffic white			280 mm	245 mm	210 mm	**€ 18.95**
931047	Signal white			280 mm	245 mm	210 mm	**€ 18.95**
930972	Traffic white	130 mm	130 mm		95 mm	70 mm	**€ 7.95**
931048	Signal white	130 mm	130 mm		95 mm	70 mm	**€ 7.95**
930973	Traffic white	155 mm	155 mm		120 mm	95 mm	**€ 9.95**
931049	Signal white	155 mm	155 mm		120 mm	95 mm	**€ 9.45**
930974	Traffic white	210 mm	210 mm		175 mm	135 mm	**€ 10.95**
931050	Signal white	210 mm	210 mm		175 mm	135 mm	**€ 10.95**
930975	Traffic white	240 mm	240 mm		205 mm	180 mm	**€ 13.95**
931051	Signal white	240 mm	240 mm		205 mm	180 mm	**€ 13.95**
930976	Traffic white	280 mm	280 mm		245 mm	210 mm	**€ 18.95**
931052	Signal white	280 mm	280 mm		245 mm	210 mm	**€ 18.95**

MODULAR SYSTEM COB 31 W

The MODULAR recessed ceiling light range offers a wide range of possible applications. Whether virtually invisible or with a prominent frame - these modules are as flexible as you want them to be. By replacing the reflectors, different light beams can be created and by using filters / diffusers, you can individually select or retrofit your lighting mood. We offer the LED modules in warm and neutral white. This gives you the option of adapting the individual elements to local requirements in order to create your perfect lighting situation.

Ra>90 SDCM<3 UGR<19

MODULAR SYSTEM COB 31 W

·Lamp can be customised with comprehensive accessories

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	No
Height	103 mm	Light Beam Angle	60 Degree
Ø	85 mm	CRI (Ra)	90
Power	31 W	Rated Current	900 mA
Rated Input Voltage	35-36 V/DC		



565352

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565352	Grey	WW 3000 K	3660 lm	**€ 99.95**
565353	Grey	NW 4000 K	3850 lm	**€ 99.95**

CC | IP20 | III | 1 CH

Accessories

930084	17° reflector for modular system COB		**€ 15.95**
930085	40° reflector for modular system COB		**€ 15.95**
930087	Frosted glass diffuser for modular system COB		**€ 0.95**
930088	Honeycomb filter for modular system COB		**€ 4.95**
930089	170 mm mounting ring for modular system COB, 150 mm		**€ 17.95**
930090	230 mm mounting ring for modular system COB, 220 mm		**€ 23.95**
930091	Swivel mounting ring for modular system COB, 115 mm		**€ 25.95**
930092	Cardan frame 1-fold for modular system COB, 130x130 mm		**€ 29.95**
930093	Cardan frame 2-fold for modular system COB, 130x240 mm		**€ 53.95**
930094	Cardan insert without frame for modular system COB		**€ 71.95**
930095	Cardan insert without frame for modular system COB		**€ 71.95**
930096	Cardan insert without frame for modular system COB		**€ 92.95**
930097	Cardan insert without frame for modular system COB		**€ 92.95**
862157	BASIC, CC, V8-40-900/40 W		**€ 23.95**
862264	BASIC, DIM, CC, D090040NTF/40 W		**€ 37.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 55.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

ZAURAK

Recessed ceiling lights can be subtly integrated into private and commercial spaces, yet when it comes to replacing, the existing ceiling cut-out can present a problem. The ZAURAK series comes with an adjustable mounting clip, which can be used with larger and smaller ceiling cut-outs. In addition, the ZAURAK has a low installation depth for universal use. Two exchangeable cover rings in silver and black are included in the scope of delivery.

CCT IP44 power switch

ZAURAK

- **Light colour adjustable in three stages**
- **Output adjustable in two stages**
- **Adjustable recess dimension 65-270 mm [model-dependent]**
- **Ideal renovation solution for ceiling recesses**
- **Incl. two colour rings [black/silver]**

Application Area
Bathroom / WC, Corridor / stairwell, Home / Living, Refurbishment

Housing	Plastic	Light Beam Angle	110 Degree
Colour Temperature	3000/4000/5700 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		



565327

Article	Housing Color		Luminous Flux	Height	Ø	Power Selectable	Cut Out Ø	Price
565327	White	WW NW CW	900/960/840 lm	20.5 mm	180 mm	8.0 W / 12.0 W	65-160 mm	**€ 37.95**
565328	White	WW NW CW	1440/1710/1530 lm	21.5 mm	220 mm	12.0 W / 18.0 W	120-200 mm	**€ 45.95**
565329	White	WW NW CW	2125/2375/2250 lm	25 mm	300 mm	18.0 W / 25.0 W	150-270 mm	**€ 63.95**

IP44 A↑G G

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

insert panels

page 146

page 147

page 148

page 149

page 152

page 153

page 154

page 156

page 157

page 158

page 159

BACKLIGHT PANELS [SERIES: BASIC AND PRO] – TECHNOLOGY AND ADVANTAGES

Not every LED panel is built the same! There are technologies exist to produce homogeneous, flat and glare-free light. Each method has its own advantages and disadvantages and depends on the individual user requirements and budget needs. For example, the LED panels from our BASIC and PRO series rely on backlight technology.

In LED panels with backlight technology, the LEDs - behind the diffuser - are evenly spread over the entire panel surface and shine directly downwards. This design has a decisive advantage: no other components are required to direct the light in the desired direction [downwards], because the LEDs are already in the »right« position. The simpler design results above all in better efficiency and a lower price as well as a longer lifetime. At the same time you do not have to worry about possible yellowing of the light guide plate, which is often used in some cheaper sidelight panels.

The disadvantages: Due to their design, the LED elements require more space, which is why backlight panels are curved towards the backside and therefore have a higher thickness with it. For this [optical] reason, backlight panels are only suitable to a limited extent for suspension from the ceiling. Their smaller beam angle [approx. 90°] results in a smaller illuminated area.

advantages

- better efficiency
- longer lifetime
- lower costs
- much more attractive price/performance ratio
- no light guide plates that are prone to yellowing

disadvantages

- higher thickness
- lower beam angle [approx. 90°]
- less suitable for suspension
- thicker packaging

In the following picture you can see the typical structure of a backlight LED panel.

aluminium frame
microprismatic diffusing lens
diffuser disc
aluminium circuit board with lens LEDs
reflector insert
basic housing

BEG SDCM<3 UGR<22

BASIC

- **BEG-eligible**
- **cost-effective, ready-to-connect solution**
- **for insertion into grid ceilings**
- **Mounting in surface-mounted and recessed frames possible**
- **Refurbishment solution for T5/T8 louvre luminaires**
- **Incl. power supply unit CC, 900mA, 33-38V, 36W**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Light Beam Angle	120 Degree
Height	32 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes	UGR	22



100140

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Width	Power	Price
100143	White	WW 3000 K	3900 lm	1195 mm	295 mm	30.5 W	**€ 39.95**
100149	White	WW 3000 K	3900 lm	595 mm	595 mm	30.5 W	**€ 34.95**
100140	White	WW 3000 K	3900 lm	620 mm	620 mm	30.5 W	**€ 35.95**
100144	White	NW 4000 K	4320 lm	1195 mm	295 mm	30.5 W	**€ 39.95**
100150	White	NW 4000 K	4320 lm	595 mm	595 mm	30.5 W	**€ 34.95**
100141	White	NW 4000 K	4320 lm	620 mm	620 mm	33.0 W	**€ 35.95**

IP40 | 1 CH | A↑G E

Accessories

930674	Safety cable		**€ 3.95**
930676	Mounting brackets for 600x600/300x1,200 mm backlit panel		**€ 3.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 55.95**

Accessories for **100140**, **100141**

930665	Surface-mounted frame for 620x620 mm panel		**€ 47.95**
930668	Recessed frame for 620x620 mm panel		**€ 45.95**

Accessories for **100143**, **100144**

930666	Surface-mounted frame for 300x1,200 mm panel		**€ 55.95**
930669	Recessed frame for 300x1,200 mm panel		**€ 53.95**

Accessories for **100149**, **100150**

930664	Surface-mounted frame for 595x595 mm panel		**€ 43.95**
930667	Recessed frame for 595x595 mm panel		**€ 41.95**

BEG CCT UGR<22

BASIC FLEX

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Light colour adjustable in three stages**
- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Renovation solution for T5/T8 louver lights**
- **Incl. CC power supply, 900mA, 33-38 V, 36 W**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000/6000 K	Light Beam Angle	120 Degree
Luminous Flux	3900/4320/4140 lm	CRI (Ra)	80
Power	30.5 W	IK Protection Class	IK03
Rated Input Voltage	220-240 V/AC	UGR	22



100142

Article	Housing Color		Length	Width	Height	Power	Power Selectable	Price
100145	White	WW NW CW	295 mm	1195 mm	32 mm	30.5 W		**€ 43.95**
100142	White	WW NW CW	620 mm	620 mm	25 mm		30.5 W	**€ 38.95**

IP40 | 1 CH | A↑G E

Accessories

930674	Safety cable	**€ 3.95**
930676	Mounting brackets for 600x600/300x1,200 mm backlit panel	**€ 3.95**
862264	BASIC, DIM, CC, D090040NTF/40 W	**€ 37.95**
862192	BASIC, DIM, Multi CC, IE-45D	**€ 55.95**

Accessories for **100142**

930665	Surface-mounted frame for 620x620 mm panel	**€ 47.95**
930668	Recessed frame for 620x620 mm panel	**€ 45.95**

Accessories for **100145**

930666	Surface-mounted frame for 300x1,200 mm panel	**€ 55.95**
930669	Recessed frame for 300x1,200 mm panel	**€ 53.95**

BASIC OFFICE

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65**
- **Microprismatic surface structure**
- **Suitable for office spaces, reception rooms and hallways**
- **Good value, ready-to-install solution**
- **Incl. CC power supply, 900mA, 33-38 V, 36 W**

Application Area
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	4000 K	Light Beam Angle	90 Degree
Luminous Flux	4000 lm	CRI (Ra)	80
Height	32 mm	IK Protection Class	IK03
Power	30.5 W	UGR	19
Rated Input Voltage	220-240 V/AC		



100146

Article	Housing Color		Length	Width	Height	Power	Power Selectable	Price
100147	White	NW	295 mm	1195 mm	32 mm	30.5 W		**€ 42.95**
100151	White	NW	595 mm	595 mm	25 mm		30.5 W	**€ 37.95**
100146	White	NW	620 mm	620 mm	25 mm		30.5 W	**€ 39.95**

IP40 | 1 CH | A ↑ G | E

Accessories

930674	Safety cable		**€ 3.95**
930676	Mounting brackets for 600x600/300x1,200 mm backlit panel		**€ 3.95**
862264	BASIC, DIM, CC, D090040NTF/40 W		**€ 37.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 55.95**

Accessories for **100146**

930665	Surface-mounted frame for 620x620 mm panel		**€ 47.95**
930668	Recessed frame for 620x620 mm panel		**€ 45.95**

Accessories for **100147**

930666	Surface-mounted frame for 300x1,200 mm panel		**€ 55.95**
930669	Recessed frame for 300x1,200 mm panel		**€ 53.95**

Accessories for **100151**

930664	Surface-mounted frame for 595x595 mm panel		**€ 43.95**
930667	Recessed frame for 595x595 mm panel		**€ 41.95**

PRO OFFICE

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Highly efficient solution**
- **Renovation solution for T5/T8 louver lights**
- **Suitable for office spaces/reception rooms/hallways**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65**
- **Microprismatic surface structure**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Control	Dimmable via optional power supply unit
Height	32 mm		
Power	17 W	CRI (Ra)	80
Rated Input Voltage	35-40 V/DC	Rated Current	450 mA
Power Supply Unit incl.	No	IK Protection Class	IK03
Light Beam Angle	90 Degree	UGR	19



100084

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Width	EEI	Price
100084	White	WW 3000 K	2880 lm	620 mm	620 mm	D	**€ 54.95**
100089	White	WW 3000 K	2880 lm	1195 mm	295 mm	E	**€ 56.95**
100122	White	NW 4000 K	3200 lm	295 mm	1195 mm	D	**€ 55.95**
100148	White	NW 4000 K	3200 lm	595 mm	595 mm	C	**€ 49.95**
100088	White	NW 4000 K	3200 lm	620 mm	620 mm	D	**€ 54.95**

CC | IP40 | 1 CH

Accessories

930674	Safety cable	**€ 3.95**
930676	Mounting brackets for 600x600/300x1,200 mm backlit panel	**€ 3.95**
862257	QUICK, CC, 450 mA, 30-40 V, 20 W	**€ 29.95**
862191	BASIC, DIM, Multi CC, IE-25D	**€ 51.95**

Accessories for **100084**, **100088**

930665	Surface-mounted frame for 620x620 mm panel	**€ 47.95**
930668	Recessed frame for 620x620 mm panel	**€ 45.95**

Accessories for **100089**, **100122**

930666	Surface-mounted frame for 300x1,200 mm panel	**€ 55.95**
930669	Recessed frame for 300x1,200 mm panel	**€ 53.95**

Accessories for **100148**

930664	Surface-mounted frame for 595x595 mm panel	**€ 43.95**
930667	Recessed frame for 595x595 mm panel	**€ 41.95**

SIDELIGHT-PANELS [SERIES: STANDARD] – TECHNOLOGY AND ADVANTAGES

Not every LED panel is built the same! There are technologies exist to produce homogeneous, flat light. Each method has its own advantages and disadvantages and depends on the individual user requirements and budget needs. For example LED panels from our standard series use sidelight technology.

Unlike backlight panels, the LEDs are not spread over the entire panel surface, but are located on the side of the aluminum frame of the luminaire. Depending on the model and version, only one, two or all four sides are equipped with LED stripes. What all edgelit or sidelight panels have in common is that the LEDs shine into the center of the panel.The light must therefore still be redirected in order to radiate downwards.

The most important element here is the light guide plate. This is usually made of acrylic glass [also PMMA (polymethyl methacrylate), a transparent thermoplastic material], which distributes the light evenly over the entire surface and deflects it downwards. In addition, acrylic glass does not yellow with age. In addition to the light guide plate, which deflects the light by means of small laser-engraved dots, the additional reflector, similar to the one the backlight panel, and the diffuser also contribute to the significantly more complex structure of a sidelight panel [see picture to the right].

The great advantage is the lower construction thickness, which is why edgelit panels can be integrated more discreetly in rooms and are better suited as pendant variants. At the same time, the panels allow a higher beam angle [approx. 120°] what results in a larger illuminated area. The disadvantages: Edgelit panels are more expensive and offer less efficiency and lifetime compared to backlight panels.

advantages

- lower thickness
- higher beam angle [approx. 120°]
- more suitable for suspension
- thinner packing

disadvantages

- higher costs
- worse price/performance ratio
- average lifetime
- lower efficiency

In the following picture you can see the typical structure of a sidelight LED panel.

aluminium frame mithit LEDs

microprismatic diffusing lens

diffuser disc

light guide panel

reflector insert

EVA [ethylene vinyl acetate copolymer] foam

back panel

CCT Ra>90 UGR<22

STANDARD FLEX

- **Light colour adjustable in three stages**
- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for pendant mounting**
- **Suitable for reception rooms and hallways**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Control	Dimmable via optional power supply unit
Colour Temperature	3000/4000/6000 K		
Height	10 mm	CRI (Ra)	90
Rated Input Voltage	33-38 V/DC	IK Protection Class	IK03
Power Supply Unit incl.	No	UGR	22
Light Beam Angle	120 Degree		



100123

Article	Housing Color		Luminous Flux	Length	Width	Power	Rated Current	Price
100125	White	WW NW CW	3570/3990/3780 lm	1195 mm	295 mm	36.0 W	1050 mA	**€ 66.95**
100123	White	WW NW CW	3780/4200/4000 lm	620 mm	620 mm	36.0 W	1050 mA	**€ 63.95**
100139	White	WW NW CW	5300/6000/5700 lm	1195 mm	595 mm	51.5 W	1500 mA	**€ 131.95**
100154	White	WW NW CW	5300/6000/5700 lm	1240 mm	620 mm	51.5 W	1500 mA	**€ 135.95**

CC IP40 III 1 CH A↑G F

Accessories
930674 Safety cable **€ 3.95**

Accessories for **100123**
930665 Surface-mounted frame for 620x620 mm panel **€ 47.95**
930670 Recessed frame for 620x620 mm backlit panel **€ 47.95**

Accessories for **100123**, **100125**
930672 Cable suspension for 620x620/300x1,200 mm panel **€ 17.95**
862193 BASIC, DIM, Multi CC, IE-45HD **€ 55.95**
862258 QUICK, CC, 1,050 mA, 25-40 V, 42 W **€ 37.95**

Accessories for **100125**
930666 Surface-mounted frame for 300x1,200 mm panel **€ 55.95**
930671 Recessed frame for 300x1,200 mm backlit panel **€ 55.95**

Accessories for **100139**
930675 Surface-mounted frame for 600x1,200 mm panel **€ 55.95**
930688 Recessed frame for 600x1,200 mm backlit panel **€ 67.95**

Accessories for **100139**, **100154**
930673 Cable suspension for 600x1,200 mm panel **€ 25.95**
862194 BASIC, DIM, Multi CC, IE-75D **€ 67.95**
862259 QUICK, CC, 1,500 mA, 27-42 V, 60 W **€ 45.95**

Ra>90 SDCM<3 UGR<19

STANDARD OFFICE

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for pendant mounting**
- **Suitable for office spaces, reception rooms, hallways**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65**
- **Microprismatic surface structure**

Application Area
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Light Beam Angle	90 Degree
Colour Temperature	4000 K	Control	Dimmable via optional power supply unit
Luminous Flux	4200 lm		
Height	9 mm	CRI (Ra)	90
Power	36 W	Rated Current	1050 mA
Rated Input Voltage	33-38 V/DC	IK Protection Class	IK03
Power Supply Unit incl.	No	UGR	19



100124

Article	Housing Color		Length	Width	EEI	Price
100138	White	NW	1195 mm	295 mm	G	**€ 66.95**
100124	White	NW	620 mm	620 mm	F	**€ 63.95**

CC IP40 1 CH

Accessories

930672	Cable suspension for 620x620/300x1,200 mm panel		**€ 17.95**
930674	Safety cable		**€ 3.95**
862258	QUICK, CC, 1,050 mA, 25-40 V, 42 W		**€ 37.95**
862193	BASIC, DIM, Multi CC, IE-45HD		**€ 55.95**

Accessories for **100124**

930665	Surface-mounted frame for 620x620 mm panel		**€ 47.95**
930670	Recessed frame for 620x620 mm backlit panel		**€ 47.95**

Accessories for **100138**

930666	Surface-mounted frame for 300x1,200 mm panel		**€ 55.95**
930671	Recessed frame for 300x1,200 mm backlit panel		**€ 55.95**

STANDARD SANO

The SANO LED panel is a simple and cost-effective solution for renovating old T5/T8 louver lights. Its slim design enables seamless integration into existing installations without the need for additional adjustments.

Due to its eligibility for BEG German federal funding for energy-efficient buildings, the SANO insert panel is a sustainable and economically attractive solution. The panel provides uniform illumination with high colour reproduction values and minimises glare, which is particularly important in commercial environments.

BEG Ra>90 UGR<22

STANDARD SANO

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for pendant mounting**
- **Renovation solution for T5/T8 louver lights**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium, Polycarbonate	Rated Input Voltage	35-40 V/DC
Colour Temperature	4000 K	Power Supply Unit incl.	No
Luminous Flux	4900 lm	Light Beam Angle	120 Degree
Length	1495 mm	Control	Dimmable via optional power supply unit
Width	295 mm	CRI (Ra)	90
Height	10 mm	Rated Current	1050 mA
Power	33 W	UGR	22

Article	Housing Color		Price
100158	White	NW	**€ 107.95**

CC IP40 III A↑G D

Accessories

930795	Surface-mounted frame for 1,500x300 mm panel	**€ 63.95**
930796	Recessed frame for 1,500x300 mm panel	**€ 55.95**
930673	Cable suspension for 600x1,200 mm panel	**€ 25.95**
930674	Safety cable	**€ 3.95**
862258	QUICK, CC, 1,050 mA, 25-40 V, 42 W	**€ 37.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

CCT IK08 Ra>90 UGR<19

OFFICE FLEX

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for pendant mounting**
- **Suitable for office spaces, reception rooms, hallways**
- **Light colour adjustable in three stages**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65**
- **Microprismatic surface structure**

Application Area
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Light Beam Angle	100 Degree
Colour Temperature	3000/4000/5700 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	10 mm		
Power	40 W	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK08
Power Supply Unit incl.	Yes	UGR	19



100078

Article	Housing Color		Luminous Flux	Length	Width	Price
100078	White	WW NW CW	3300 lm	620 mm	620 mm	**€ 143.95**
100079	White	WW NW CW	3500 lm	1195 mm	295 mm	**€ 175.95**

IP20 A↑G F

Accessories
862193 BASIC, DIM, Multi CC, IE-45HD **€ 55.95**

Accessories for **100078**
930665 Surface-mounted frame for 620x620 mm panel **€ 47.95**
930670 Recessed frame for 620x620 mm backlit panel **€ 47.95**

Accessories for **100079**
930666 Surface-mounted frame for 300x1,200 mm panel **€ 55.95**
930671 Recessed frame for 300x1,200 mm backlit panel **€ 55.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

hcl

HCL

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for 24 V HCL controllers**
- **Suitable for event spaces/reception rooms, hallways**
- **Low housing depth**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Rated Input Voltage	24 V/DC
Colour Temperature	3000-5500 K	Power Supply Unit incl.	No
Luminous Flux	3551 lm	Light Beam Angle	120 Degree
Length	620 mm	Control	Dimmable via optional controller
Width	620 mm		
Height	10 mm	CRI (Ra)	80
Power	49.5 W		



100032

Article	Housing Color	Colour Temperature	Price
100032	White	WW CW 3000-5500 K	**€ 135.95**

CV | IP20 | III | 2 CH | A ↑ G | E

Accessories

930665	Surface-mounted frame for 620x620 mm panel		**€ 47.95**
930670	Recessed frame for 620x620 mm backlit panel		**€ 47.95**
862122	FLAT, CV, UT 24 V/50 W		**€ 41.95**
862166	BASIC, CV, Q8H-24-100 W		**€ 77.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 79.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

hcl IK05 Ra>90 RGB+CCT UGR<19



STANDARD RGB CCT

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for event spaces, reception rooms, hallways**
- **Suitable for 24 V colour and HCL controllers**

Application Area
Reception / Communication, Object lighting / architecture, Wellness / Spa / Gym, Advertising lighting, Hotel / catering, Theatre / event, Refurbishment

Housing	Aluminium	Light Beam Angle	110 Degree
Colour Temperature	2700-6500 K	Control	Dimmable via optional controller
Luminous Flux	5000 lm		
Height	12.5 mm	CRI (Ra)	90
Power	88 W	IK Protection Class	IK05
Rated Input Voltage	24 V/DC	UGR	19
Power Supply Unit incl.	No		



100160

Article	Housing Color		Length	Width	Price
100160	White	RGB WW CW	595 mm	595 mm	**€ 164.95**
100159	White	RGB WW CW	620 mm	620 mm	**€ 167.95**

CV | IP40 | 5 CH | A↑G F

Accessories for **100159**

930665	Surface-mounted frame for 620x620 mm panel	**€ 47.95**
930668	Recessed frame for 620x620 mm panel	**€ 45.95**

Accessories for **100160**

930664	Surface-mounted frame for 595x595 mm panel	**€ 43.95**
930667	Recessed frame for 595x595 mm panel	**€ 41.95**
930907	Recessed frame 600x600 for standard panels	**€ 43.95**

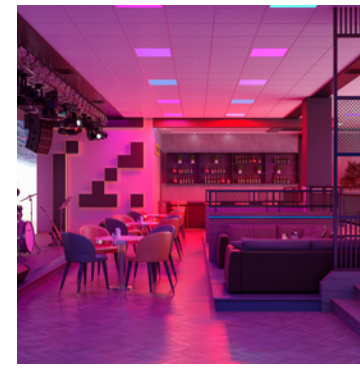

RGBWW RGBNW Ra>90





STANDARD RGBW

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Powerful and intense colours, incl. pastel tones**
- **Suitable for 24 V colour controllers**
- **Suitable for event spaces, reception rooms, hallways**

Application Area
Reception / Communication, Object lighting / architecture, Wellness / Spa / Gym, Advertising lighting, Hotel / catering, Theatre / event, Refurbishment

Housing	Aluminium	Light Beam Angle	110 Degree
Height	11 mm	Control	Dimmable via optional controller
Power	94 W		
Rated Input Voltage	24 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No		



100152

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Width	Price
100156	White	RGB WW 3000 K	4000 lm	595 mm	595 mm	**€ 147.95**
100152	White	RGB WW 3000 K	4000 lm	620 mm	620 mm	**€ 151.95**
100157	White	RGB NW 4000 K	4200 lm	595 mm	595 mm	**€ 147.95**
100153	White	RGB NW 4000 K	4200 lm	620 mm	620 mm	**€ 151.95**

CV | IP40 | III | 4 CH | A ↑ G | F

Accessories

862166	BASIC, CV, Q8H-24-100 W	**€ 77.95**
872091	IP, CV, V6-320-24	**€ 175.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 79.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)	**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 91.95**

Accessories for **100152**, **100153**

930665	Surface-mounted frame for 620x620 mm panel	**€ 47.95**
930668	Recessed frame for 620x620 mm panel	**€ 45.95**

Accessories for **100156**, **100157**

930664	Surface-mounted frame for 595x595 mm panel	**€ 43.95**
930667	Recessed frame for 595x595 mm panel	**€ 41.95**

Accessories for **100157**

930907	Recessed frame 600x600 for standard panels	**€ 43.95**

surface mounted wall lights

page 162

page 163

page 164

page 167

page 168

Ra>90 SDCM<3

ACAMAR

Application Area
Reception / Communication, Object lighting / architecture, Home / Living, Hotel / catering

Housing	Aluminium	Base Height	33 mm
Colour Temperature	3000 K	Power	6.5 W
Length	170 mm	Rated Input Voltage	220-240 V/AC
Width	100 mm	Power Supply Unit incl.	Yes
Height	80 mm	Light Beam Angle	105 Degree
Base Length	120 mm	Control	Trailing-edge dimmer
Base Width	60 mm	CRI (Ra)	92


341194

Article	Housing Color		Luminous Flux	Price
341196	Black, Gold	WW	300 lm	**€ 123.95**
341194	White	WW	390 lm	**€ 123.95**
341195	Silver, White	WW	500 lm	**€ 123.95**

IP20

APODIS

Application Area
Home / Living, Reception / Communication, Home office / study, Hotel / catering

Housing	Aluminium	Base Height	100 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Length	76 mm	Power Supply Unit incl.	Yes
Width	61 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	60 mm		
Base Width	18 mm	CRI (Ra)	80



341200

Article	Housing Color		Luminous Flux	Height	Power	Light Beam Angle	Price
341200	Gold, Black	WW	350 lm	500 mm	10.8 W	40 Degree	**€ 184.95**
341202	Gold, Black	WW	450 lm	800 mm	14.7 W	30 Degree	**€ 224.95**



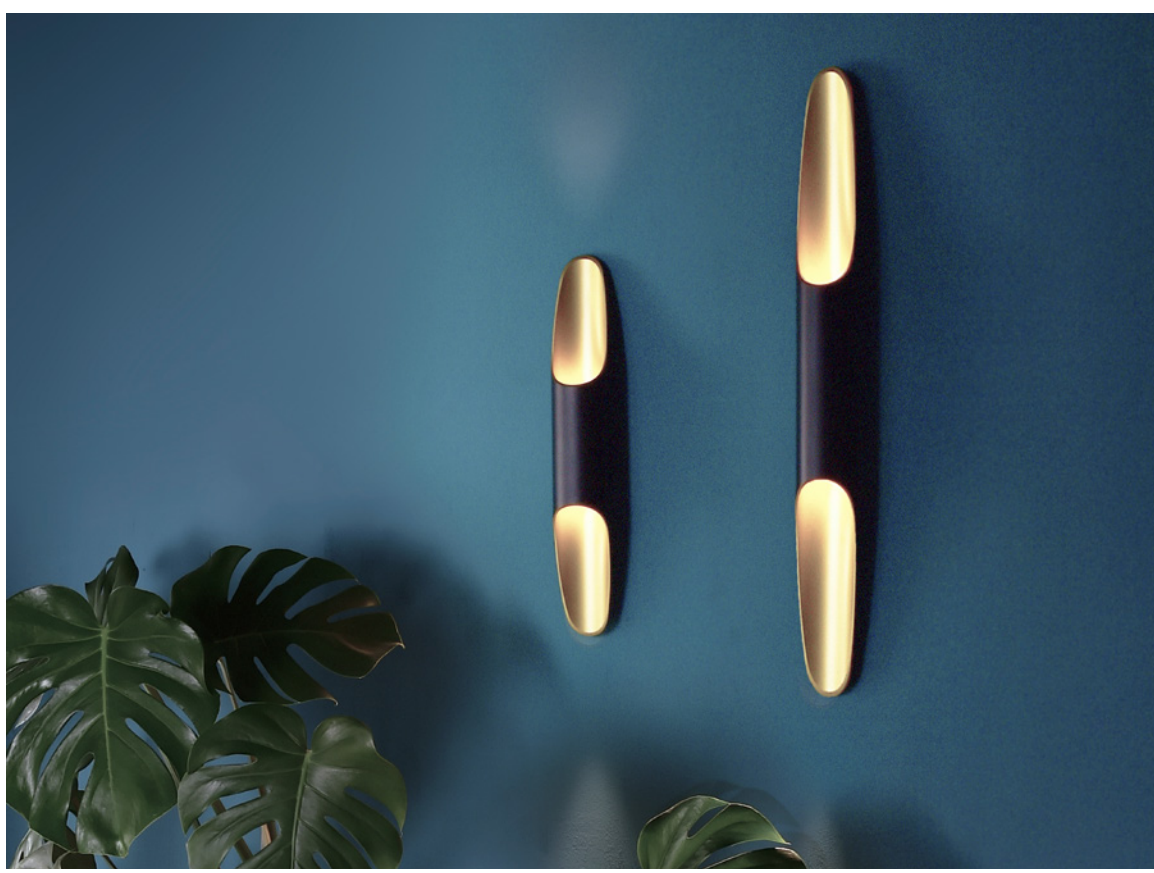

CUBE

Little cube, big effect: The cube emits its light up and down in equal measure, drawing the eye to spacial elements and bringing structure. The compact cube made from concrete or plaster [available in the colour tones beige, grey, dark grey, white and black] with its subdued design has the essentials in focus, assuming a back seat presence.

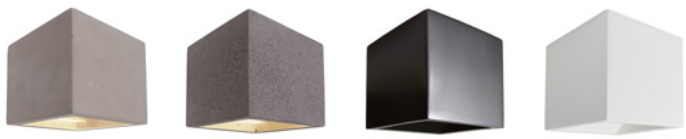

CUBE

- **Exchangeable lamp**
- **A variety of concrete/plaster colour variants**
- **Can be painted over [white variant only]**

Application Area
Home / Living, Hotel / catering

Length	115 mm	Max. Power	1x max. 25 W
Width	115 mm	Rated Input Voltage	220-240 V/AC
Height	115 mm	Control	Dimmable via optional light source
Base Length	57 mm		
Base Width	57 mm	Colour of Light Output	White
Base Height	63 mm		

Article	Housing Color	Housing	Paintable	Price
341183	Grey	Concrete		**€ 55.95**
341184	Dark grey	Concrete		**€ 55.95**
341250	Black	Plaster		**€ 57.95**
341249	White	Plaster	Yes	**€ 57.95**

G9 IP20

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

CAN IP20

- **Customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Base Height	77 mm
Length	72 mm	Max. Power	1x max. 7.5 W
Height	125 mm	Rated Input Voltage	220-240 V/AC
Ø	60 mm	Control	Dimmable via optional light source
Base Length	12.6 mm		
Base Width	40 mm		

Article	Housing Color	Price
341341	White	**€ 35.95**
341342	Black	**€ 35.95**

Accessories

930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

page 30 page 68 page 70 page 72 page 383

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

CAN UP & DOWN IP20

The CAN wall light provides versatile lighting options for various commercial and private projects. The up/down variant with light emission on both sides can be adapted perfectly to individual room concepts. The GU10 base enables simple replacement of the lamp, while the screw-on cylinder allows tool-free access. Installation for rigid and flexible conductors is particularly easy due to the integrated push terminals. Individual accents can be created with the optional, interchangeable decorative rings. The CAN wall light is part of a comprehensive series and is also available as a pendant, ceiling, reading and outdoor light.

page 30

page 68

page 70

page 72

CAN UP & DOWN IP20

- **Customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Base Height	77 mm
Length	72 mm	Max. Power	2x max. 7.5 W
Height	230 mm	Rated Input Voltage	220-240 V/AC
Ø	60 mm	Control	Dimmable via optional light source
Base Length	12.6 mm		
Base Width	40 mm		

Article	Housing Color	Price
341343	White	**€ 43.95**
341344	Black	**€ 43.95**

Accessories

930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

built in wall lights

page 174

page 176

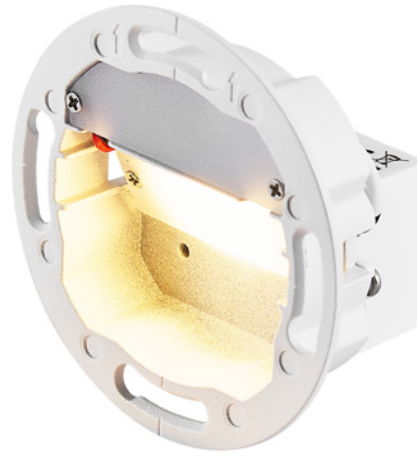

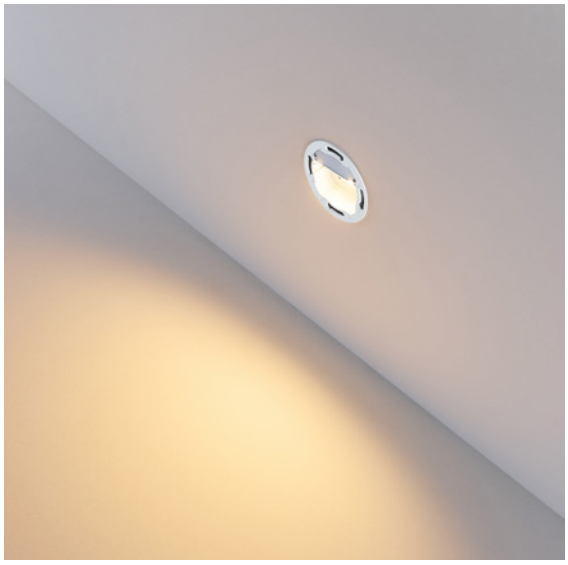

ALWAID PRO

The new ALWAID PRO series combines functional wall-mounted recessed luminaires with a compact design, elegant appearance, and practical features. With a mounting depth of only 39 mm, the luminaires fit into all common 68 mm switch boxes – whether standard or deep versions. This makes the ALWAID PRO ideal for renovations and new constructions with limited space.

The ALWAID PRO series offers maximum design freedom: all luminaires are available with both round and square covers. Two colour options are available for the housing – white and black – as well as two high-quality material finishes: aluminium and glass/polycarbonate. Additionally, a selection of geometric light exit openings provides individual lighting moods depending on the application and architectural requirements. Furthermore, the recessed spots [2,700 K or 3,000 K] are available as dimmable versions or as ALWAID PRO MOTION with integrated motion sensor. The latter additionally offers a two-stage power switch [2 W / 4 W] for individual adjustment of light output.

All variants are equipped with an integrated power supply for 230V direct connection and can be easily through-wired – ideal for series installations in corridors or staircases.

BEG IK05 SDCM<3 UGR<19



ALWAID PRO

- **integrated power supply unit for 230V direct connection**
- **through-wiring possible**
- **dimmable via leading edge/trailing edge phase**
- **suitable for 68 mm switch boxes of normal and deep design**

Housing	Aluminium, Polycarbonate	Installation Depth	39 mm
		Cut Out Ø	68 mm
Height	41 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	71.5 mm		
Power	4 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK05
Power Supply Unit incl.	Yes	Light Direction	Front

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565733	White	WW 2700 K	610 lm	**€ 47.95**
565734	White	WW 3000 K	630 lm	**€ 47.95**

IP20 A↑G E

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

IK06

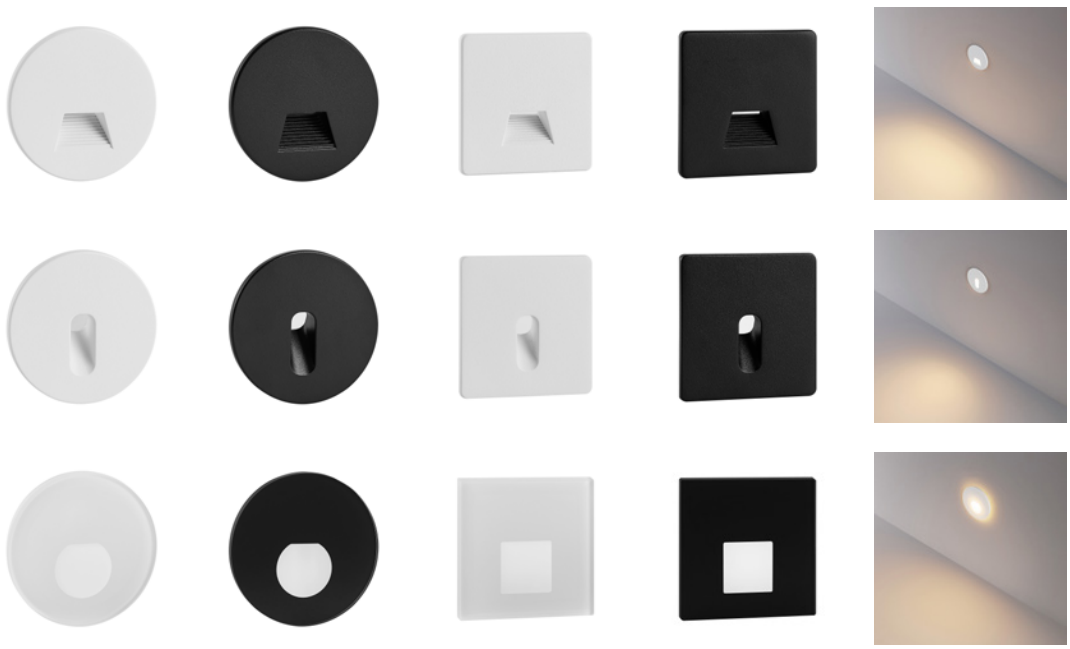

ALWAID PRO

Article	Housing Color	Housing	housing shape	light cone	L x W x H	Ø x H	Price
931013	White	Aluminium	round	wide		75 x 18 mm	**€ 9.95**
931015	Black	Aluminium	round	wide		75 x 18 mm	**€ 9.95**
931025	White	Aluminium	angular	wide	75 x 75 x 18 mm		**€ 9.95**
931027	Black	Aluminium	angular	wide	75 x 75 x 18 mm		**€ 9.95**
931007	White	Aluminium	round	narrow		75 x 18 mm	**€ 9.95**
931009	Black	Aluminium	round	narrow		75 x 18 mm	**€ 9.95**
931019	White	Aluminium	angular	narrow	75 x 75 x 18 mm		**€ 9.95**
931021	Black	Aluminium	angular	narrow	75 x 75 x 18 mm		**€ 9.95**
931037	White	Glass / Polycarbonate	round	soft		78 x 23 mm	**€ 14.95**
931039	Black	Glass / Polycarbonate	round	soft		78 x 23 mm	**€ 14.95**
931031	White	Glass / Polycarbonate	angular	soft	78 mm		**€ 14.95**
931033	Black	Glass / Polycarbonate	angular	soft	78 mm		**€ 14.95**

IP20

IK05 power switch SDCM<3 UGR<19

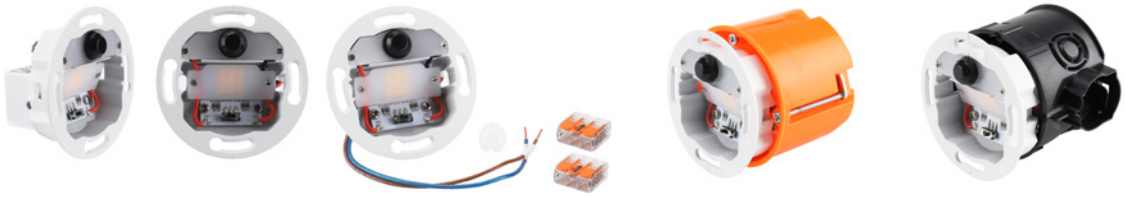

ALWAID PRO MOTION

- **integrated power supply unit for 230V direct connection**
- **with motion detector**
- **through-wiring possible**
- **power adjustable in 2 stages**
- **suitable for 68 mm switch boxes of normal and deep design**

Housing	Aluminium, Polycarbonate	Power Supply Unit incl.	Yes
Height	41 mm	Installation Depth	39 mm
Ø	71.5 mm	Cut Out Ø	68 mm
Power Selectable	2 W, 4 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK05
		Light Direction	Front

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565736	White	WW 2700 K	610 lm	**€ 51.95**
565737	White	WW 3000 K	630 lm	**€ 51.95**

IP20 A↑G F

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

IK06

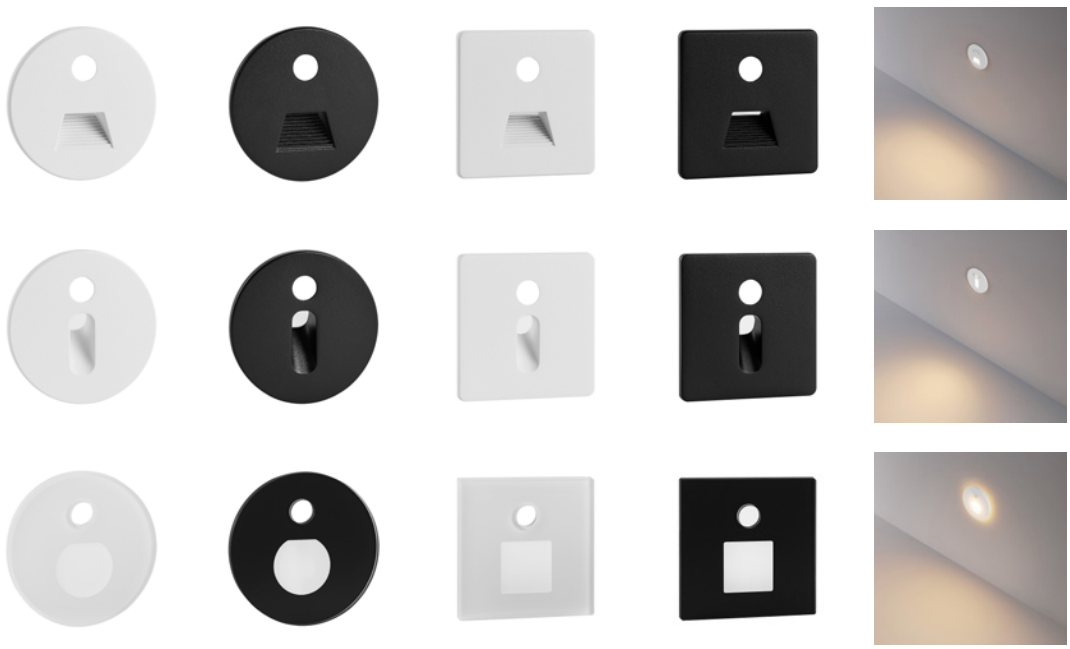

ALWAID PRO MOTION

Article	Housing Color	Housing	housing shape	light cone	L x W x H	Ø x H	Price
931016	White	Aluminium	round	wide		75 x 18 mm	**€ 12.95**
931018	Black	Aluminium	round	wide		75 x 18 mm	**€ 12.95**
931028	White	Aluminium	angular	wide	75 x 75 x 18 mm		**€ 12.95**
931030	Black	Aluminium	angular	wide	75 x 75 x 18 mm		**€ 12.95**
931010	White	Aluminium	round	narrow		75 x 18 mm	**€ 12.95**
931012	Black	Aluminium	round	narrow		75 x 18 mm	**€ 12.95**
931022	White	Aluminium	angular	narrow	75 x 75 x 18 mm		**€ 12.95**
931024	Black	Aluminium	angular	narrow	75 x 75 x 18 mm		**€ 12.95**
931040	White	Glass / Polycarbonate	round	soft		75 x 18 mm	**€ 17.95**
931042	Black	Glass / Polycarbonate	round	soft		75 x 18 mm	**€ 17.95**
931034	White	Glass / Polycarbonate	angular	soft	75 x 75 x 18 mm		**€ 17.95**
931036	Black	Glass / Polycarbonate	angular	soft	75 x 75 x 18 mm		**€ 17.95**

IP20

reading lights

page 180

page 181

page 182

page 184

BRAHE ROUND

The BRAHE wall light with indirect lighting and narrow light emission angle of 25° means anyone else in the bed can sleep peacefully while the person on the other side is still reading. The simple design of the BRAHE also impresses in other areas, such as reading nooks.

page 194

page 195

BRAHE ROUND

- **Direct and indirect lighting can be switched on separately**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Height	110 mm	Light Beam Angle	25 Degree
Ø	150 mm	Swivelling Angle	360 Degree
Power	8.5 W	CRI (Ra)	80



341242

Article	Housing Color		Luminous Flux	Price
341243	Black	WW	395 lm	**€ 83.95**
341242	White	WW	490 lm	**€ 83.95**

IP20 A↑G G

BRAHE SQUARE

- **High-quality, flexible gooseneck**
- **Gooseneck with silicone sleeve for easy cleaning**
- **Individually adjustable via flexible gooseneck**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Base Height	25 mm
Colour Temperature	3000 K	Power	3.3 W
Length	310 mm	Rated Input Voltage	100-240 V/AC
Height	80 mm	Power Supply Unit incl.	Yes
Ø	25 mm	Light Beam Angle	25 Degree
Base Length	80 mm	Swivelling Angle	360 Degree
Base Width	80 mm	CRI (Ra)	80



341236

Article	Housing Color		Luminous Flux	Price
341237	Black	WW	165 lm	**€ 53.95**
341236	White	WW	175 lm	**€ 53.95**

IP20 A↑G G

CAN TILT SQUARE

The square CAN reading light is the ideal choice for modern hotel rooms and sophisticated living spaces. It offers a convenient charging option for smartphones and other devices via USB-C and USB-A (article no. 341339 and 341340 only). The widely used GU10 base enables the quick replacement of the lamp, while the screw-on cylinder housing allows tool-free access. Individual accents can be set with the optional, replaceable decorative rings. The CAN reading light is part of a versatile lighting family, which is also available as a pendant, ceiling, wall and outdoor light.

page 30 page 68 page 70 page 72



CAN TILT SQUARE

- **Flat and discreet lamp base**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be customised with a wide range of accessories**
- **Can be combined with the comprehensive product family of the CAN series**
- **Can be charged via USB-C/USB-A [art. nos. 341339 and 341340 only]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Max. Power	1x max. 7.5 W
Length	102 mm	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Base Width	100 mm	Rotation Angle	355 Degree
Base Height	100 mm	Swivelling Angle	90 Degree

Article	Housing Color	Charging connection	Price
341337	White		**€ 39.95**
341338	Black		**€ 39.95**
341339	White	1 x USB type A / 1 x USB type C	**€ 55.95**
341340	Black	1 x USB type A / 1 x USB type C	**€ 55.95**

Accessories

930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series		**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series		**€ 3.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series		**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series		**€ 3.95**
931065	Acrylic attachment for Can		**€ 3.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

CAN TILT ROUND

The round CAN reading light is the ideal choice for modern hotel rooms and sophisticated living spaces. It offers a convenient charging option for smartphones and other devices via USB-C and USB-A (article no. 341335 and 341336 only). The widely used GU10 base enables the quick replacement of the lamp, while the screw-on cylinder housing allows tool-free access. Individual accents can be set with the optional, replaceable decorative rings. The CAN reading light is part of a versatile lighting family, which is also available as a pendant, ceiling, wall and outdoor light.

page 30

page 69

page 70

page 72

CAN TILT ROUND

- **Flat and discreet lamp base**
- **Can be customised with a wide range of accessories**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive product family of the CAN series**
- **Can be charged via USB-C/USB-A [art. nos. 341335 and 341336 only]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	102 mm	Control	Dimmable via optional light source
Height	105 mm		
Ø	60 mm	Rotation Angle	355 Degree
Base Ø	100 mm	Swivelling Angle	90 Degree
Max. Power	1x max. 7.5 W		

Article	Housing Color	Charging connection	Price
341333	White		**€ 39.95**
341334	Black		**€ 39.95**
341335	White	1 x USB type A / 1 x USB type C	**€ 55.95**
341336	Black	1 x USB type A / 1 x USB type C	**€ 55.95**



Accessories

930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.



1/3

CAN TILT SQUARE BASE MIX'N MATCH 1/3

- **flat and discreet luminaire base**
- **charging option via USB-C / USB-A [only item no. 341347 and 341348]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Base Length	100 mm	Rotation Angle	340 Degree
Base Width	100 mm	Swivelling Angle	90 Degree
Max. Power	1x max. 7.5 W		

Article	Housing Color	Charging connection	Price
341345	White		**€ 33.95**
341346	Black		**€ 33.95**
341347	White	1 x USB type A / 1 x USB type C	**€ 49.95**
341348	Black	1 x USB type A / 1 x USB type C	**€ 49.95**

GU10 IP20

1/3

CAN TILT ROUND BASE MIX'N MATCH 1/3

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Base Ø	100 mm	Rotation Angle	340 Degree
Max. Power	1x max. 7.5 W	Swivelling Angle	90 Degree

Article	Housing Color	Charging connection	Price
341349	White		**€ 33.95**
341350	Black		**€ 33.95**
341351	White	1 x USB type A / 1 x USB type C	**€ 49.95**
341352	Black	1 x USB type A / 1 x USB type C	**€ 49.95**

GU10 IP20

2/3

CYLINDER HOUSING FUR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	95 mm		

Article	Housing Color	Price
931059	White	**€ 6.45**
931060	Black	**€ 6.45**
931061	Bronze	**€ 14.95**
931062	Brass	**€ 14.95**
931063	Black grey	**€ 14.95**
931064	Rosé	**€ 14.95**

IP20

3/3

REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 3.95**
930302	Black	**€ 3.95**
930303	Gold	**€ 3.95**
930366	Silver	**€ 3.95**

IP20

table and floor lights

page 190

page 191

page 192

page 192

page 194

page 195

page 196



CAN

- **customisable with extensive accessories**
- **customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Primary Cable Length	2 m
Height	1115 mm	Primary Connection End	Safety plug
Ø	60 mm	Control	Dimmable via optional light source
Base Ø	252 mm		
Max. Power	1x max. 7.5 W	Rotation Angle	340 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree

Article	Housing Color	Price
343037	White	**€ 103.95**
343038	Black	**€ 103.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

CAN

- **customisable with extensive accessories**
- **customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Primary Cable Length	2 m
Height	400 mm	Primary Connection End	Safety plug
Ø	60 mm	Control	Dimmable via optional light source
Base Ø	182 mm		
Max. Power	1x max. 7.5 W	Rotation Angle	340 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree

Article	Housing Color	Price
346086	White	**€ 76.95**
346087	Black	**€ 76.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

1/3

CAN BASE MIX'N MATCH 1/3

- **customisable with extensive accessories**
- **individual lighting solution thanks to interchangeable light source**
- **can be customised with cylinder housing in 6 different colours**
- **can be combined with the extensive product family of the CAN series**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium
Length	252 mm
Width	240 mm
Height	1115 mm
Base Ø	240 mm
Max. Power	1x max. 7.5 W
Rated Input Voltage	220-240 V/AC

Primary Cable Length	2 m
Primary Connection End	Safety plug
Control	Dimmable via optional light source
Rotation Angle	340 Degree
Swivelling Angle	90 Degree

Article	Housing Color	Price
343039	White	**€ 97.95**
343040	Black	**€ 97.95**

GU10 IP20

1/3

CAN BASE MIX'N MATCH 1/3

Housing	Aluminium
Length	182 mm
Width	170 mm
Height	400 mm
Base Ø	170 mm
Max. Power	1x max. 7.5 W
Rated Input Voltage	220-240 V/AC

Primary Cable Length	2 m
Primary Connection End	Safety plug
Control	Dimmable via optional light source
Rotation Angle	340 Degree
Swivelling Angle	90 Degree

Article	Housing Color	Price
346088	White	**€ 69.95**
346089	Black	**€ 69.95**

GU10 IP20

2/3

CYLINDER HOOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	95 mm		

Article	Housing Color	Price
931059	White	**€ 6.45**
931060	Black	**€ 6.45**
931061	Bronze	**€ 14.95**
931062	Brass	**€ 14.95**
931063	Black grey	**€ 14.95**
931064	Rosé	**€ 14.95**

IP20

3/3

REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 3.95**
930302	Black	**€ 3.95**
930303	Gold	**€ 3.95**
930366	Silver	**€ 3.95**

IP20

BRAHE

- **Can be rotated and swivelled**
- **Direct and indirect lighting can be switched on separately**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	25 Degree
Height	455 mm	Swivelling Angle	90 Degree
Ø	150 mm	Primary Connection End	Power plug IP20
Power	8.5 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC		

Article	Housing Color		Luminous Flux	Price
346016	Black	WW	370 lm	**€ 124.95**
346015	White	WW	470 lm	**€ 124.95**



page 180 page 181

power switch

Taster

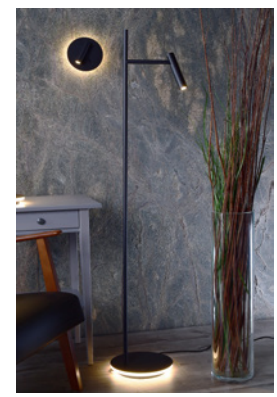

BRAHE

- **Can be rotated and swivelled**
- **Direct and indirect lighting can be switched on separately**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	25 Degree
Height	1387 mm	Swivelling Angle	90 Degree
Ø	305 mm	Primary Connection End	Power plug IP20
Power Selectable	3 W, 8 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC		

Article	Housing Color		Luminous Flux	Price
343026	Black	WW	555 lm	**€ 207.95**
343025	White	WW	735 lm	**€ 207.95**



page 184

page 185

ADHARA

Classic design interpreted in a modern way - the ADHARA made from aluminium captivates with its classic lines, ultra-modern materials and high degree of flexibility. The ADHARA can be optimally adjusted to any situation via its two or three joints. Its powerful LED module delivers 950 lumens and can also be dimmed thanks to a touch sensor. Whether for the boss's office or for a child's desk, the ADHARA looks great anywhere.

ADHARA

- **Can be rotated and swivelled via joints**
- **Dimmable in three stages using touch sensor**

Application Area
Home / Living, Reception / Communication, Home office / study

Housing	Aluminium	Power	12 W
Colour Temperature	3000 K	Rated Input Voltage	100-240 V/AC
Luminous Flux	950 lm	Power Supply Unit incl.	Yes
Length	498 mm	Light Beam Angle	120 Degree
Height	480 mm	Swivelling Angle	180 Degree
Ø	150 mm	Primary Cable Length	1.6 m
Base Height	21.5 mm	Primary Connection End	Power plug
Base Ø	180 mm	CRI (Ra)	80

Article	Housing Color		Price
346026	Black	WW	**€ 159.95**
346027	White	WW	**€ 159.95**
346028	Silver	WW	**€ 159.95**

IP20 A↑G G

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

office lights

page 200

page 202

page 204

page 205

page 206

page 212

page 213

page 214

page 215

ROUND TRANSPARENT LED PANEL

The LED pendant light is equipped with a transparent acrylic glass pane for soft direct and indirect light distribution, which is almost transparent when switched off. When switched on, the pane distributes the light almost entirely without glare.
With a glare rating [UGR] of under 22, this pendant light is suitable for various communal or even conference rooms. Bright, efficient and with a sophisticated design, this light not only stands out from all other office equipment, but can also be integrated into any other modern interior.

BEG CCT Ra>90 SDCM<5 UGR<22

ROUND TRANSPARENT LED PANEL

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Light colour adjustable in three stages**
- **Particularly delicate frame**
- **Low glare value**
- **Transparent luminous element**

Application Area
Reception / Communication, Office / conference, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Ø	215 mm
Colour Temperature	3000/3500/4000 K	Power Supply Unit incl.	Yes
Power	50 W	Light Beam Angle	140 Degree
Rated Input Voltage	200-240 V/AC	Light Beam Angle 2	150 Degree
Height	12 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	633 mm		
Pendulum Length	1800 mm	CRI (Ra)	90
Base Height	43 mm	IK Protection Class	IK04



342251

Article	Housing Color			Luminous Flux	Price
342252	Black	WW	NW	6000/6100/6100 lm	**€ 339.95**
342253	Light grey	WW	NW	6100/6200/6200 lm	**€ 339.95**
342251	White	WW	NW	6200/6400/6400 lm	**€ 339.95**

IP40

Accessories

843340	DALI, Triac dimmer, 100-240 V, 400 W, IP20	**€ 59.95**
843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20	**€ 55.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

LED PANEL TRANSPARENT ANGULAR

The LED pendant lamp has transparent glass for direct and indirect light distribution that is almost see-through when switched off. When the light is switched on, the pane distributes the light almost entirely without glare.
This pendant lamp is fully office-compatible with a glare value [UGR] of under 19. Bright, efficient and with a sophisticated design, this light not only stands out in any type of office environment.

BEG CCT Ra>90 UGR<19

LED PANEL TRANSPARENT ANGULAR

- **Very low glare value**
- **Light colour adjustable in 2 stages**
- **Transparent luminous element**
- **Max. suspended mounting 1,800 mm**

Application Area
Reception / Communication, Office / conference, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Length	570 mm
Colour Temperature	3000/4000 K	Base Width	80 mm
Luminous Flux	5600/6100 lm	Base Height	50 mm
Power	53 W	Power Supply Unit incl.	Yes
Rated Input Voltage	220-240 V/AC	Light Beam Angle	360 Degree
Length	295 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Width	1195 mm		
Height	12 mm	CRI (Ra)	90
Pendulum Length	1800 mm		



342221

Article	Housing Color		Price
342219	Black	WW NW	**€ 239.95**
342220	Light grey	WW NW	**€ 239.95**
342221	White	WW NW	**€ 239.95**

IP40 EL A↑G E

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

BEG DALI Ra>90 SDCM<3 UGR<6

OFFICE THREE STANDARD

- **Suitable for VDU workstations (according to EN 12464-1 BAP65 [L65 = 3000cd/m²])**
- **BEG-eligible**
- **CRI>95 for direct light component**
- **Indirect light component 85%**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium
Colour Temperature	4000 K
Luminous Flux	8300 lm
Power	56 W
Rated Input Voltage	180-264 V/AC
Length	1179 mm
Width	64 mm
Height	35 mm
Pendulum Length	2500 mm
Base Length	603 mm

Base Width	52 mm
Base Height	35 mm
Power Supply Unit incl.	Yes
Light Beam Angle	115 Degree
Light Beam Angle 2	50 Degree
Control	DALI 2 / DT6, Intelli Push-Dim
CRI (Ra)	95
IK Protection Class	IK03


342258

Article	Housing Color		Price
342258	White	NW	**€ 439.95**
342259	Light grey	NW	**€ 439.95**
342260	Black	NW	**€ 439.95**

IP20 EL

OFFICE THREE PRO

- **Suitable for VDU workstations (according to EN 12464-1 BAP65 [L65 = 3000cd/m²])**
- **BEG-eligible**
- **CRI>95 for direct light component**
- **Indirect light component 85%**
- **D4i power supply unit for direct coupling with DALI sensor**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium
Colour Temperature	4000 K
Luminous Flux	10900 lm
Power	77 W
Rated Input Voltage	220-240 V/AC
Length	1391 mm
Width	64 mm
Height	35 mm
Pendulum Length	2500 mm
Base Length	603 mm

Base Width	52 mm
Base Height	35 mm
Power Supply Unit incl.	Yes
Light Beam Angle	115 Degree
Light Beam Angle 2	50 Degree
Control	DALI 2 / DT6 D4i, Intelli Push-Dim
CRI (Ra)	95
IK Protection Class	IK03


342261

Article	Housing Color		Price
342261	White	NW	**€ 559.95**
342262	Light grey	NW	**€ 559.95**
342263	Black	NW	**€ 559.95**

IP20 EL

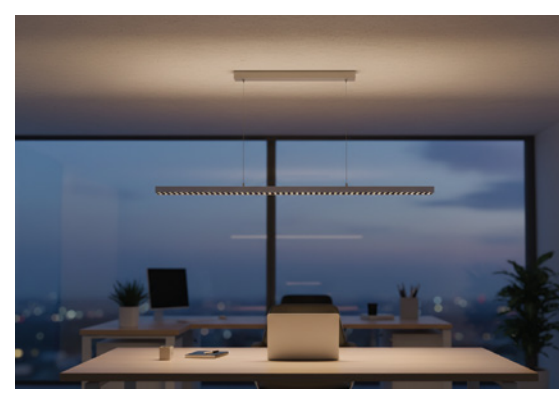

UGR<19

OFFICE ONE

- **Very low glare value**
- **Service life 50,000 h L80B10**
- **Dimmable using touch sensor**
- **Ready to use**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	80 W
Colour Temperature	4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	7400 lm	Power Supply Unit incl.	Yes
Length	610 mm	Light Beam Angle	110 Degree
Width	310 mm	Light Beam Angle 2	90 Degree
Height	1950 mm	Primary Cable Length	1.5 m
Base Length	460 mm	Primary Connection End	Power plug
Base Width	300 mm	CRI (Ra)	80
Base Height	8 mm		



343030

Article	Housing Color		Price
343030	Silver	NW	**€ 655.95**

IP20 A↑G F

UGR<19

OFFICE ONE MOTION

- **Very low glare value**
- **Service life 50,000 h L80B10**
- **Dimmable using touch sensor**
- **Motion sensor**
- **Ready to use**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	80 W
Colour Temperature	4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	7400 lm	Power Supply Unit incl.	Yes
Length	610 mm	Light Beam Angle	110 Degree
Width	310 mm	Light Beam Angle 2	90 Degree
Height	1950 mm	Primary Cable Length	1.5 m
Base Length	460 mm	Primary Connection End	Power plug
Base Width	300 mm	CRI (Ra)	80
Base Height	8 mm	Motion Detector	Yes

Article	Housing Color		Price
343032	Silver	NW	**€ 759.95**

IP20 A↑G F

DELL

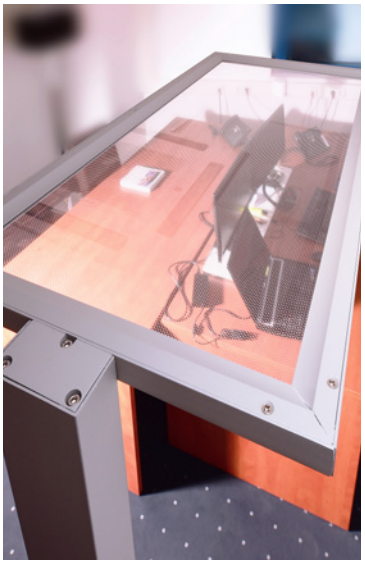

OFFICE ONE TRANSPARENT

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	55 W
Colour Temperature	4000 K	Rated Input Voltage	200-240 V/AC
Luminous Flux	6245 lm	Power Supply Unit incl.	No
Length	610 mm	Light Beam Angle	150 Degree
Width	310 mm	Light Beam Angle 2	150 Degree
Height	1950 mm	Primary Cable Length	2.5 m
Base Length	500 mm	Primary Connection End	Power plug
Base Width	225 mm	CRI (Ra)	80
Base Height	8 mm		



343022

Article	Housing Color		Price
343022	Silver	NW	**€ 655.95**

IP20 A↑G E

page 202

OFFICE THREE

The OFFICE THREE series is our bestseller and problem solver for lighting individual workstations. Available as a free-standing or table lamp, the OFFICE THREE impresses with excellent light quality [Ra95] and glare-free [UGR<6] and ensures fatigue-free working in any situation. Thanks to the individually adjustable brightness for direct and indirect light, OFFICE THREE enables high-quality and flexible illumination of individual workstations. Optimised for tables with standard dimensions of 160 x 80 cm, the series is also suitable for other table sizes.

High-precision radar presence detector

- The 24Ghz presence sensor recognises even the smallest movements on the desk - such as movements of the computer mouse - and switches the light on automatically.
  Faulty switch-offs are effectively prevented despite the short run-on time.
- Without movement, the brightness is reduced to 30% after 5*/15/30 minutes [*default setting].
- If there is no movement, the light switches off after a further 5*/15/30 minutes [*default setting].

Daylight sensor

- Switch on the light and dim to the desired brightness [this setting is saved by the daylight sensor as the default].
- As soon as the ambient light changes, the sensor adjusts the brightness according to the stored standard [10% tolerance].

Touch panel

- Brightness of direct and indirect light separately or synchronised, infinitely adjustable
- Direct and indirect light can be switched separately
- Continuously adjustable light colour [PRO models only]
- Adjustable run-on time of the presence sensor

Universal table clamp

- table clamp can be used for table tops with a total thickness of 15-65 mm [incl. substructure] as required
- If part of the frame construction runs in the clamping area of the luminaire, the hard rubber buffers supplied must be used to compensate for the unevenness and create a flush clamping area.
- The universal design of the table clamp allows it to be mounted on almost all table tops.

Optional mounting kit

- For larger table tops or for free positioning on the table, the optional mounting kit can be used instead of the pre-installed table clamp. This is simply mounted through a drill hole in the table.
- suitable for table tops with a total thickness of 15-35 mm
- suitable for hole diameters from 22-30 mm

BEG IK06 Ra>90 SDCM<3 UGR<6

OFFICE THREE STANDARD FLOOR

- **Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 <=3,000 cd/m²])**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Ideal for high-quality illumination of individual workstations**
- **Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables**
- **Direct and indirect light can be dimmed and switched separately using touch panel**
- **Adjustable switch-off delay of the sensor [5/15/30 mins]**
- **High-precision radar presence detector detects the smallest movements**
- **Daylight sensor for dynamic brightness adjustment**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	80 W
Colour Temperature	4000 K	Rated Input Voltage	180-264 V/AC
Luminous Flux	10100 lm	Power Supply Unit incl.	Yes
Length	1240 mm	Light Beam Angle	120 Degree
Width	64 mm	Light Beam Angle 2	50 Degree
Height	1950 mm	Primary Cable Length	2.5 m
Base Length	530 mm	Primary Connection End	Safety plug
Base Width	225 mm	CRI (Ra)	95
Base Height	10 mm	Motion Detector	Yes



342228

Article	Housing Color		Price
342228	White	NW	**€ 999.95**
342229	Light grey	NW	**€ 999.95**
342230	Black	NW	**€ 999.95**

IP20 EL

BEG IK06 Ra>90 SDCM<3 UGR<6

OFFICE THREE STANDARD TABLE

- **Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 <=3,000 cd/m²])**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Ideal for high-quality illumination of height-adjustable individual workstations**
- **Redesigned and extended lamp head for ideal illumination of 160x80 cm tables**
- **Suitable for table designs with 15-65 mm thickness**
- **Direct and indirect light can be dimmed and switched separately using touch panel**
- **High-precision radar presence detector detects the smallest movements**
- **Adjustable switch-off delay of the sensor [5/15/30 mins]**
- **Daylight sensor for dynamic brightness adjustment**
- **Incl. 2.5 m connecting cable with safety plug and C21 mains plug**
- **Incl. hard rubber buffers for use with table designs that run close to the edge**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	80 W
Colour Temperature	4000 K	Rated Input Voltage	180-264 V/AC
Luminous Flux	10100 lm	Power Supply Unit incl.	Yes
Length	1240 mm	Light Beam Angle	120 Degree
Width	64 mm	Light Beam Angle 2	50 Degree
Height	1194 mm	Primary Cable Length	2.5 m
Base Length	115 mm	Primary Connection End	Safety plug
Base Width	80 mm	CRI (Ra)	95
Base Height	120 mm	Motion Detector	Yes



346063

Article	Housing Color		Price
346063	White	NW	**€ 839.95**
346064	Light grey	NW	**€ 839.95**
346065	Black	NW	**€ 839.95**

IP20 EL

Accessories for **346063**
930727 Assembly kit for table lamp Office Three **€ 31.95**

Accessories for **346064**
930728 Assembly kit for table lamp Office Three, light grey **€ 31.95**

Accessories for **346065**
930729 Assembly kit for table lamp Office Three **€ 31.95**

BEG CCT IK06 Ra>90 SDCM<3 UGR<6

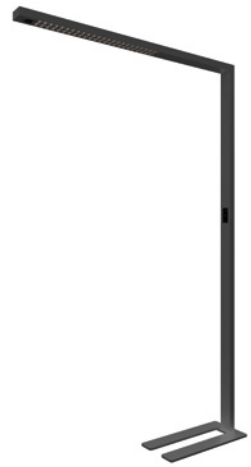

OFFICE THREE PRO FLOOR

- **Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 <=3,000 cd/m²])**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Ideal for high-quality illumination of individual workstations**
- **Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables**
- **Direct and indirect light can be dimmed and switched separately using touch panel**
- **Light colour adjustable via touch panel**
- **High-precision radar presence detector detects the smallest movements**
- **Adjustable switch-off delay of the sensor [5/15/30 mins]**
- **Daylight sensor for dynamic brightness adjustment**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	80 W
Colour Temperature	2700-6500 K	Rated Input Voltage	180-264 V/AC
Luminous Flux	9000/9800 lm	Power Supply Unit incl.	Yes
Length	1240 mm	Light Beam Angle	120 Degree
Width	64 mm	Light Beam Angle 2	50 Degree
Height	1950 mm	Primary Cable Length	2.5 m
Base Length	530 mm	Primary Connection End	Safety plug
Base Width	225 mm	CRI (Ra)	95
Base Height	10 mm	Motion Detector	Yes


342231

Article	Housing Color		Price
342231	White	WW CW	**€ 1167.95**
342232	Light grey	WW CW	**€ 1167.95**
342233	Black	WW CW	**€ 1167.95**

IP20 EL

BEG CCT IK06 Ra>90 SDCM<3 UGR<6

OFFICE THREE PRO TABLE

- **Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 <=3,000 cd/m²])**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Ideal for high-quality illumination of height-adjustable individual workstations**
- **Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables**
- **Suitable for table designs with 15-65 mm thickness**
- **Direct and indirect light can be dimmed and switched separately using touch panel**
- **Light colour adjustable via touch panel**
- **High-precision radar presence detector detects the smallest movements**
- **Daylight sensor for dynamic brightness adjustment**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	80 W
Colour Temperature	2700-6500 K	Rated Input Voltage	180-264 V/AC
Luminous Flux	9000/9800 lm	Power Supply Unit incl.	Yes
Length	1240 mm	Light Beam Angle	120 Degree
Width	64 mm	Light Beam Angle 2	50 Degree
Height	1194 mm	Primary Cable Length	2.5 m
Base Length	115 mm	Primary Connection End	Safety plug
Base Width	80 mm	CRI (Ra)	95
Base Height	120 mm	Motion Detector	Yes



346066

Article	Housing Color		Price
346066	White	WW CW	**€ 999.95**
346067	Light grey	WW CW	**€ 999.95**
346068	Black	WW CW	**€ 999.95**

IP20 EL

Accessories for **346066**
930727 Assembly kit for table lamp Office Three **€ 31.95**

Accessories for **346067**
930728 Assembly kit for table lamp Office Three, light grey **€ 31.95**

Accessories for **346068**
930729 Assembly kit for table lamp Office Three **€ 31.95**

hall floodlights

page 219

page 220

page 222

page 225

GOODWAY
GS-260MS

BEG CCT IK08 IP65 power switch SDCM<5

HIGHBAY BASIC

- **cost-effective and powerful**
- **particularly energy-efficient and economical**
- **power adjustable in three stages**
- **light colour adjustable in three stages**

Application Area
Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

Housing	Aluminium, Polycarbonate, Steel
Colour Temperature	4000/4500/5700 K
Luminous Flux	33500/34500/33500 lm
Height	111 mm
Ø	302 mm

Power Selectable	210 W, 160 W, 110 W
Rated Input Voltage	100-277 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	90 Degree
CRI (Ra)	80
IK Protection Class	IK08



732162

Article	Housing Color		Price
732162	Black	NW CW	**€ 140.95**

IP65

Accessories

930977	60° Lens for Highbay Basic	**€ 15.95**
930978	120° Lens for Highbay Basic	**€ 15.95**
930641	Chain suspension 1 m for Alludra / Highbay Basic / Vega	**€ 11.95**
930685	Chain suspension 3 m for Alludra / Highbay Basic / Vega	**€ 19.95**
930742	Wall assembly arm for Vega OnOff, Highbay Basic	**€ 31.95**
930571	Outdoor cable conn. 2 cables 4-14 mm, 2-5 strands 0.5-4 mm², 450 V AC/24 A	**€ 7.95**
930573	Outdoor Y connector for 3 cables 4-14 mm, 3 strands, 0.5-4 mm², 450 V AC/24 A	**€ 8.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

HIGHBAY BASIC DALI

The HIGHBAY BASIC DALI high-bay spotlight combines high light output with economic efficiency and flexible adaptability. Thanks to selectable output and switchable light color in three levels, the high bay spotlight is ideal for industrial halls, storage areas and production areas. The DALI-2/D4i control system enables modern lighting management including Intelli-Data function for luminaire, energy and maintenance data.

HIGHBAY BASIC DALI

- **cost-effective and high-performance**
- **particularly energy-efficient and economical**
- **output adjustable in three stages**
- **light colour adjustable in three stages**
- **with Intelli-Data: Dali parts 251, 252, 253 for lighting, energy and maintenance data**
- **with D4i driver for direct connection to DALI sensors**

Application Area
Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

Housing	Aluminium, Polycarbonate, Steel
Colour Temperature	4000/4500/5700 K
Luminous Flux	33500/34500/33500 lm
Height	111 mm
Ø	302 mm

Power Selectable	210 W, 160 W, 110 W
Rated Input Voltage	100-277 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	90 Degree
Control	DALI 2 / DT6 D4i
CRI (Ra)	80
IK Protection Class	IK08



732163

Article	Housing Color		Price
732163	Black	NW CW	**€ 167.95**

IP65

Accessories

930977	60° Lens for Highbay Basic	**€ 15.95**
930978	120° Lens for Highbay Basic	**€ 15.95**
930641	Chain suspension 1 m for Alludra / Highbay Basic / Vega	**€ 11.95**
930685	Chain suspension 3 m for Alludra / Highbay Basic / Vega	**€ 19.95**
930742	Wall assembly arm for Vega OnOff, Highbay Basic	**€ 31.95**
930571	Outdoor cable conn. 2 cables 4-14 mm, 2-5 strands 0.5-4 mm², 450 V AC/24 A	**€ 7.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

VEGA

The VEGA high-bay light - quality that shines through. The high-bay light is the perfect solution for industrial halls/warehouses where first-class lighting is required. The variant with three selectable output levels can adapt to your requirements. The spotlights are also very energy efficient, which has a positive effect on your operating costs. A long service life of 50,000 hours (L80B20) ensures reliable, no-compromise lighting for a long time to come. With optional lenses, the VEGA spotlights can achieve a UGR value below 19, ensuring glare-free light. We also offer variants with DALI control capability for those wanting precise lighting control. The high-bay lights are also eligible for BEG German federal funding for energy-efficient buildings.

BEG IK09 IP65 power switch SDCM<5 UGR<19

VEGA

- **High-quality, flexible and powerful high-bay lights**
- **Suitable for fire-prone facilities (EN60598-2-24)**
- **Output adjustable in three stages**
- **UGR <19 with optional lens**
- **Particularly energy efficient**

Application Area
Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

Housing	Aluminium	Rated Input Voltage	100-277 V/AC
Surface	Powder-coated	Power Supply Unit incl.	Yes
Luminous Flux	28800 lm	Light Beam Angle	120 Degree
Height	120 mm	Primary Cable Length	1.5 m
Ø	400 mm	CRI (Ra)	80
Power Selectable	90 W, 130 W, 160 W	IK Protection Class	IK09



732156

Article	Housing Color	Colour Temperature	Price
732156	Black	NW 4000 K	**€ 255.95**
732158	Black	CW 5700 K	**€ 255.95**

CC IP65 D

Accessories

930742	Wall assembly arm for Vega OnOff, Highbay Basic	**€ 31.95**
930743	60° lens for Vega	**€ 39.95**
930641	Chain suspension 1 m for Alludra / Highbay Basic / Vega	**€ 11.95**
930685	Chain suspension 3 m for Alludra / Highbay Basic / Vega	**€ 19.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

05
06

BEG DALI IK09 IP65 SDCM<5

VEGA DALI

- **High-quality, flexible and powerful high-bay lights**
- **Suitable for fire-prone facilities (EN60598-2-24)**
- **UGR <19 with optional lens**
- **Particularly energy efficient**

Application Area
Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

Housing	Aluminium	Power Supply Unit incl.	Yes
Surface	Powder-coated	Light Beam Angle	120 Degree
Luminous Flux	28800 lm	Control	DALI 2 / DT6
Height	122 mm	Primary Cable Length	1.5 m
Ø	400 mm	CRI (Ra)	80
Power	160 W	IK Protection Class	IK09
Rated Input Voltage	100-277 V/AC		



732157

Article	Housing Color	Colour Temperature	Price
732157	Black	NW 4000 K	**€ 295.95**
732159	Black	CW 5700 K	**€ 295.95**

CC IP65 D

Accessories

930743	60° lens for Vega	**€ 39.95**
930775	Wall assembly arm for Vega DALI	**€ 31.95**
930641	Chain suspension 1 m for Alludra / Highbay Basic / Vega	**€ 11.95**
930685	Chain suspension 3 m for Alludra / Highbay Basic / Vega	**€ 19.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

damp-proof luminaires

page 229

page 230

page 231

page 232

page 234

page 235

TRI PROOF BASIC

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Particularly energy efficient**
- **Long service life of 50,000 hours L80B50**
- **Pre-installed feed-through wiring 3x1.5 mm²**
- **Cable entry point on the back**
- **Stainless steel clips on the cover can be locked with screws**
- **Robust polycarbonate [PC] plastic housing**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park, Retrofit / Refurbishment

Housing	Polycarbonate, Steel	Number in Row max.	15
Colour Temperature	4000 K	Power Supply Unit incl.	Yes
Width	82 mm	Light Beam Angle	120 Degree
Height	75 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK08


730489

Article	Housing Color		Luminous Flux	Length	Power	Price
730509	Light grey	NW	1400 lm	610 mm	10.0 W	**€ 39.95**
730483	Light grey	NW	2520 lm	610 mm	18.0 W	**€ 43.95**
730510	Light grey	NW	2800 lm	1210 mm	20.0 W	**€ 55.95**
730511	Light grey	NW	4200 lm	1510 mm	30.0 W	**€ 63.95**
730486	Light grey	NW	5040 lm	1210 mm	36.0 W	**€ 63.95**
730489	Light grey	NW	7700 lm	1510 mm	55.0 W	**€ 75.95**

IP65

Accessories

930713	Cable suspension for Tri Proof Basic	**€ 15.95**
931098	Cable gland PG/M20 incl. locknut + sealing ring, IP68	**€ 1.75**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

TRI PROOF BASIC MOTION

- **Eligible for German BEG federal funding**
- **Particularly energy efficient**
- **Long service life of 50,000 hours (L80B50)**
- **Continuous 3x1.5 mm² wiring pre-installed**
- **Cable entry point on the back**
- **Stainless steel clips on the cover can be locked with screws**
- **Robust polycarbonate (PC) plastic housing**
- **Adjustable radar motion sensor**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park, Retrofit / Refurbishment

Housing	Polycarbonate (PC)/ iron	Number in Row max.	15
Colour Temperature	4000 K	Power Supply Unit incl.	Yes
Width	82 mm	Light Beam Angle	120 Degree
Height	75 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Motion Detector	Yes
		IK Protection Class	IK08


730490

Article	Housing Color		Luminous Flux	Length	Power	Price
730484	Light grey	NW	2520 lm	610 mm	18.0 W	**€ 59.95**
730487	Light grey	NW	5040 lm	1210 mm	36.0 W	**€ 79.95**
730490	Light grey	NW	7700 lm	1510 mm	55.0 W	**€ 91.95**

IP65

Accessories

930713	Cable suspension for Tri Proof Basic	**€ 15.95**
931098	Cable gland PG/M20 incl. locknut + sealing ring, IP68	**€ 1.75**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

TRI PROOF BASIC DALI

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [180-264 V/DC EOFI: 15 %]**
- **Particularly energy efficient**
- **Long service life of 50,000 hours L80B50**
- **Pre-installed feed-through wiring 5x 1.5 mm²**
- **Cable entry point on the back**
- **Stainless steel clips on the cover can be locked with screws**
- **Robust plastic housing**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park, Safety lighting / emergency lighting, Retrofit / Refurbishment

Housing	Polycarbonate (PC)/ iron	Power Supply Unit incl.	Yes
		Light Beam Angle	120 Degree
Colour Temperature	4000 K	Control	DALI 2 / DT6, Intelli Push-Dim
Width	82 mm		
Height	75 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK08
Number in Row max.	15		



730491

Article	Housing Color		Luminous Flux	Length	Power	Price
730485	Light grey	NW	2520 lm	610 mm	18.0 W	**€ 83.95**
730488	Light grey	NW	5040 lm	1210 mm	36.0 W	**€ 103.95**
730491	Light grey	NW	7700 lm	1510 mm	55.0 W	**€ 127.95**

Accessories

930713	Cable suspension for Tri Proof Basic	**€ 15.95**
931098	Cable gland PG/M20 incl. locknut + sealing ring, IP68	**€ 1.75**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

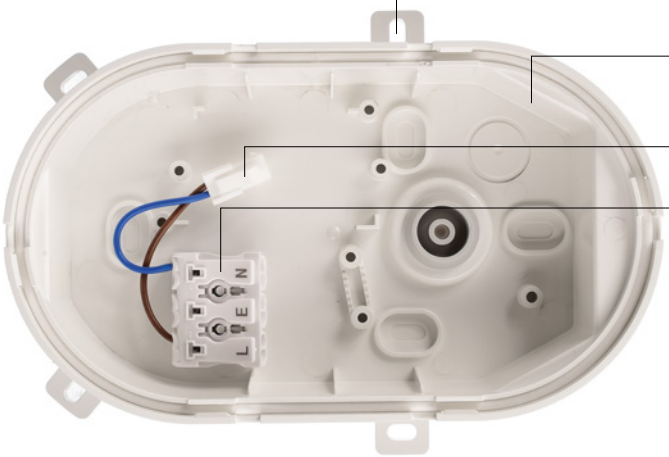

flexible mounting thanks to various fixing points [incl. fixing material]

five cable entries on different sides

AMP plug for easy installation

through-wiring possible

power adjustable in two stages [4,5/7,5W]

colour temperature adjustable [3000/4000K] via slide switch

CCT IK08 IP54 power switch

SOTANO

- **Classic cellar light with modern LED technology**
- **Colour temperature adjustable (3,000/4,000 K) via slide switch**
- **Output adjustable in two stages (4.5/7.5 W) via slide switch**
- **Six cable entry points on multiple sides**
- **Flexible installation**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room, Multi-storey car park / underground car park, Refurbishment

Housing	Polycarbonate	Power Selectable	4.5 W, 7.5 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	450/750 lm	Power Supply Unit incl.	Yes
Length	165 mm	Light Beam Angle	120 Degree
Width	120 mm	Light Direction	Front
Height	65 mm	IK Protection Class	IK08


731160

Article	Housing Color		Price
731160	White	WW NW	**€ 13.95**
731161	Grey	WW NW	**€ 13.95**
731162	Black	WW NW	**€ 13.95**

IP54

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

IK06 IP44

SOTANO RETRO ROUND

- **Classic, low-cost cellar lamp**
- **Replaceable lamp [E27]**
- **Cable entry on multiple sides**
- **Several mounting points for flexible installation**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room

Housing	PP - Polypropylene	Rated Input Voltage	220-240 V/AC
Height	100 mm	Control	Dimmable via optional light source
Ø	180 mm		
Max. Power	1x max. 60 W	IK Protection Class	IK06

Article	Housing Color	Price
731163	White	**€ 10.95**
731164	Grey	**€ 10.95**
731165	Black	**€ 10.95**

E27 IP44

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

IK06 IP44

SOTANO RETRO OVAL

- **Classic, low-cost cellar lamp**
- **Replaceable lamp [E27]**
- **Cable entry on multiple sides**
- **Several mounting points for flexible installation**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room

Housing	PP - Polypropylene	Rated Input Voltage	220-240 V/AC
Length	186 mm	Control	Dimmable via optional light source
Width	122 mm		
Height	108 mm	IK Protection Class	IK06
Max. Power	1x max. 60 W		

Article	Housing Color	Price
731166	White	**€ 8.95**
731167	Grey	**€ 8.95**
731168	Black	**€ 8.95**

E27 IP44

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

TRUNKING SYSTEMS

240 trunking systems

Trunking systems

page 244

page 247

page 248

page 249

page 250

page 251

page 257

page 257

page 258

page 259

page 260

page 261

SANOTRUNK UNIVERSAL – THE SMART SOLUTION FOR MODERN LIGHTING REFURBISHMENTS

Want to modernize old T5 and T8 trunking systems efficiently and sustainably? With SANOTRUNK UNIVERSAL, you can make almost any trunking system fit for the future.

SANOTRUNK UNIVERSAL sets new standards in terms of compatibility. Thanks to quick-fit clips and tool-free installation, the system can be integrated into almost all standard trunking systems - whether from Philips, RIDI, Trilux, Zumtobel or other manufacturers. The continuous halogen-free 5 or 7-core through-wiring, the integrated plug connectors and a selection of interchangeable lens optics [including 30°, 90°, 25° asymmetrical on one or both sides] make adaptation to any application child's play. The conversion is carried out in five simple steps:

1 - old light inserts removed [wiring remains in]

2 - hang new LED modules in old mounting rail

3 - connect modules and adjust power if necessary

4 - click in the modules

5 - finished

COMPATIBILITY OVERVIEW

brand	trunk name	shape
AEG	Gealux-TS XX	
AEG/PHILIPS	Maxos	
Antaris	Antaris	
Antaris	trunking system	
ClickLUX Tragschiene	701501880016/ 703002880017/ 704503880018	
Fluolite	TRX / TRZ	
Fluora	Mini-Fix	
Kandem	SV70 / SV75	
Lite Licht	E-STN	
Lite Licht	Q-EMMS	
Lite Licht	Q-Rail Q-TS	
Lite Licht	Q-STN***	
Litec		
Ludwig	TR50W	
Lunux	Q-STN***	
MOLTOMX	Prestige	
Newlec	HSDT	
Norton	NSL	
OMS	Prestige	
Philips	Maxos TL5 / Maxos TL-D	
Philips	TTX150	
Philips	TTX200	
Philips	TTX400	
Philips	TTX400 T5 / TTX400 T8	
Regent	Traq	

brand	trunk name	shape
Regent	ICE**	
Regiolux	SDT	
Regiolux	SDT XX	
Regiolux	SMT / SPT	
RIDI	VLG XX	
RIDI, new trunking system	VLT***	
RIDI, new trunking system	VLT XX	
RZB	Planos	
Siemens	5LJ80XX	
Siemens	5LJ9*	
Siemens	5LS8..	
Siteco	DUS*	
Siteco	Modario	
Thron	090554 / 098287	
Trilux	07650XX	
Trilux	07690XX	
Trilux	218120 (7761/7861)	
Trilux	7910X** / 7920X**	
Trilux	7770	
VEKO	PRN	
Zumtobel	PNR	
Zumtobel	Tecton	
Zumtobel	ZX1	
Zumtobel	ZX2 T8 / ZX2 T5	

with optional mounting bracket
* 930931 | ** 930932 | *** 930933

BENEFITS FOR EVERY APPLICATION

The SANOTRUNK UNIVERSAL refurbishment insert offers a wide range of possible applications and enables sustainable modernisation of your lighting.

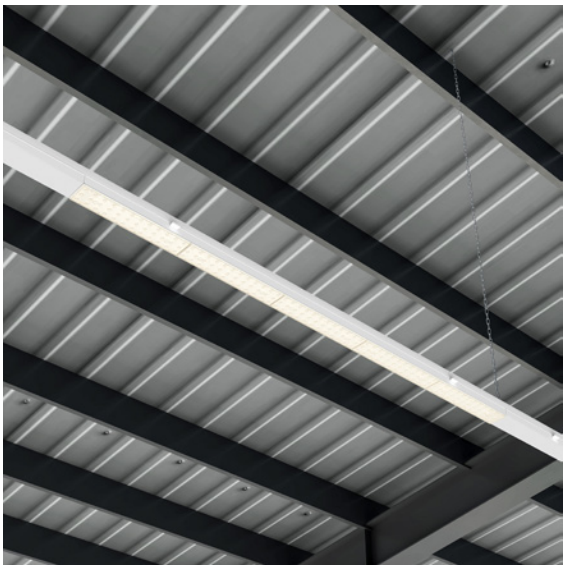

Supermarket / Sales Area
Optic: 25° asymmetric, single- or double-sided
Benefit: The asymmetric light distribution illuminates shelf areas precisely, avoids stray light in the aisles, and creates a pleasant, sales-promoting atmosphere.
Promotional displays or end caps can be illuminated using the spotlight modules.

Industrial and Production Halls
Optic: 90° beam angle
Benefit: Uniform, standard-compliant illumination of work areas. Ideal for precision tasks and safety-relevant activities.

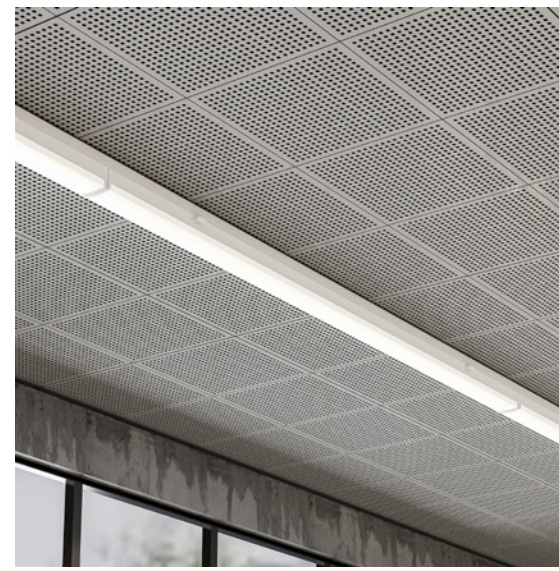

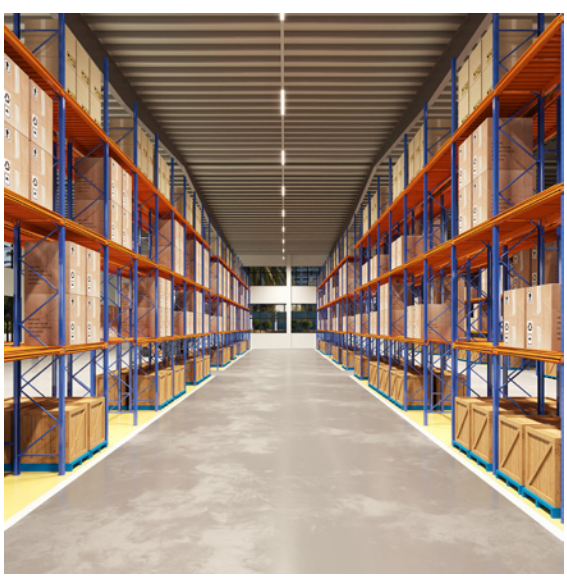

Warehouse / High-Bay Storage
Optics: 30°, 60° or 90°
Benefit: Deep shelving aisles and varying storage heights can be illuminated with pinpoint accuracy. The light reaches the lowest and highest levels – without shadows or isolated light spots.
The shelving areas are also illuminated evenly, ensuring that shelf spaces remain clearly visible.

Workshops / Assembly Areas
Optic: 120° beam angle
Benefit: Broad, low-shadow illumination of entire rooms. Perfect for fine assembly work, inspections, or manual tasks with high lighting requirements.
The homogeneous light-line appearance fully meets even the highest aesthetic demands.

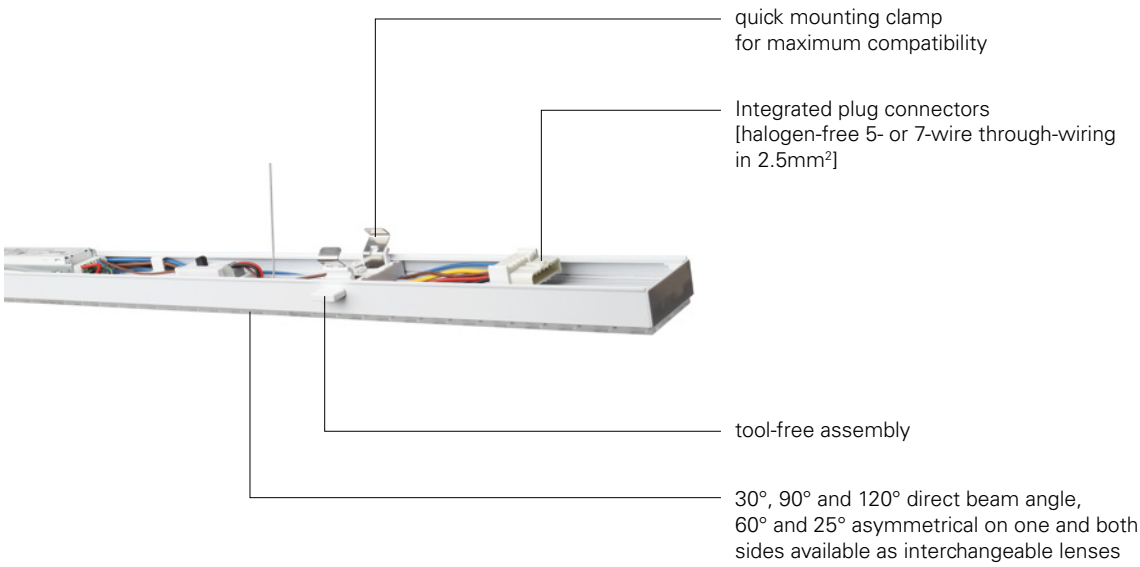

SANOTRUNK UNIVERSAL

The SANOTRUNK trunking system is a specially developed retrofit solution for the fast and cost-effective modernisation of existing T5 and T8 trunking systems. By reusing existing trunking rails, installation effort is minimised and tool-free mounting is enabled. Thanks to its compatible system architecture, SANOTRUNK UNIVERSAL can be integrated into trunking systems from leading manufacturers such as Philips, Trilux, Siteco, Zumtobel, Regiolux, Ridi, Fluolite and many others.

In addition to retrofit projects, SANOTRUNK trunking rails are also suitable for extending existing installations and for creating completely new lighting systems.

The pre-wired through-wiring with 2.5 mm² conductor cross-section ensures reliable power distribution across long trunking runs and multiple circuits. Existing wiring can continue to be used as a power supply if required.

Power-switch technology or DALI control [depending on the model] allow flexible adaptation of the lighting system. Optional blank covers and connectors provide maximum flexibility when designing lighting layouts.



SANOTRUNK UNIVERSAL

- **Renovation solution for T5/T8 light strip systems**
- **Continued use of existing mounting rails possible**
- **Easy, quick and reliable installation**
- **Compatible with common manufacturers**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Can run on emergency power**
- **Can be individually adapted to the lighting circumstances**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

Housing	Aluminium	Height	31 mm
Colour Temperature	4000 K	Rated Input Voltage	198-264 V/AC
Length	1528 mm	CRI (Ra)	80
Width	65.6 mm	IK Protection Class	IK04



707228

Article	Housing Color		Luminous Flux	Power Selectable	Light Beam Angle	Price
707228	White	NW	11600 lm	75 / 68 / 59 / 52 / 42 / 36 / 27 / 21 W	120 Degree	**€ 179.95**
707227	White	NW	12200 lm	70 / 64 / 55 / 49 / 39 / 34 / 26 / 20 W	90 Degree	**€ 179.95**
707226	White	NW	12400 lm	70 / 64 / 55 / 49 / 39 / 34 / 26 / 20 W	30 Degree	**€ 179.95**

IP40 EL 05

Accessories

930915	Sanotrunk Universal Lense, Set 5 pcs, 30 degree	**€ 23.95**
930916	Sanotrunk Universal Lense, Set 5 pcs, 60 degree	**€ 23.95**
930917	Sanotrunk Universal Lense, Set 5 pcs, 90 degree	**€ 23.95**
930918	Sanotrunk Universal Lense, Set 5 pcs, 25 degree, single side asymmetrical	**€ 23.95**
930919	Sanotrunk Universal Lense, Set 5 pcs, 25 degree, double side asymmetrical	**€ 23.95**
930920	Sanotrunk universal dummy cover, shortenable, PC	**€ 15.95**
930922	Sanotrunk Universal Blind Cover Aluminium	**€ 31.95**
930921	Sanotrunk universal mounting clips for blind cover, can be shortened 2 pcs.	**€ 3.95**
930931	Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.	**€ 3.95**
930932	Sanotrunk universal mounting clamps Regent ICE 2 pcs.	**€ 3.95**
930933	Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.	**€ 3.95**
930923	Sanotrunk Universal Power feed socket WAGO 267-501	**€ 9.95**
930924	Sanotrunk Universal Power supply plug WAGO 267-510	**€ 9.95**
930925	Sanotrunk Universal Power supply socket On/Off wired WAGO 267-501	**€ 11.95**
930927	Sanotrunk Universal Power supply plug On/Off wired WAGO 267-510	**€ 13.95**
930929	Connector, Sanotrunk Universal	**€ 35.95**

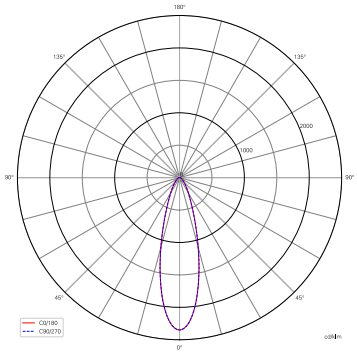

30°

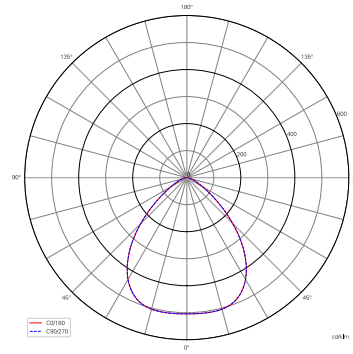

90°

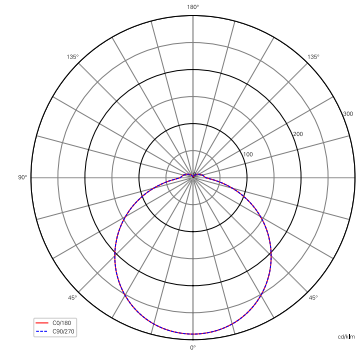

120°

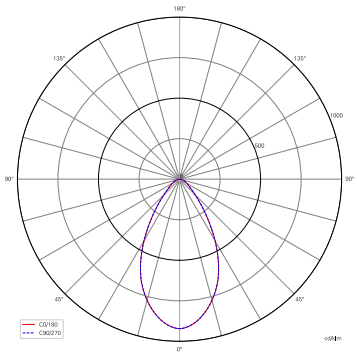

60°

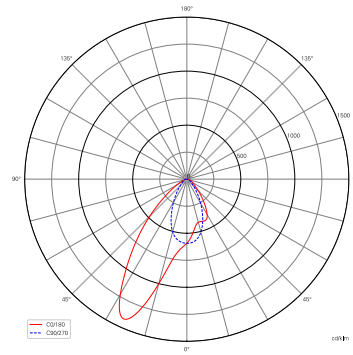

25°, asymmetrical on one side

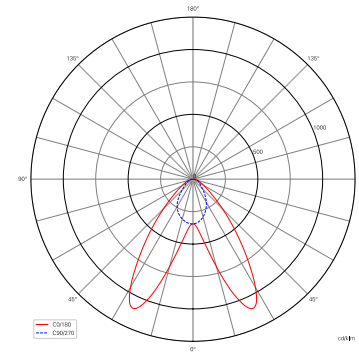

25°, double-sided asymmetrical

SANOTRUNK UNIVERSAL DALI

- **Renovation solution for T5/T8 light strip systems**
- **Continued use of existing mounting rails possible**
- **Easy, quick and reliable installation**
- **Compatible with common manufacturers**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Can run on emergency power**
- **DALI versions with Intelli-Data: Dali parts 251, 252, 253 for lighting, energy and maintenance data**
- **Can be individually adapted to the lighting circumstances**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

Housing	Aluminium	Rated Input Voltage	198-264 V/AC
Colour Temperature	4000 K	Control	DALI 2 / DT6, Push-Dim
Length	1528 mm		
Width	65.6 mm	CRI (Ra)	80
Height	31 mm	IK Protection Class	IK04



707229

Article	Housing Color		Luminous Flux	Power	Light Beam Angle	Price
707231	White	NW	11600 lm	75.0 W	120 Degree	**€ 219.95**
707230	White	NW	12200 lm	70.0 W	90 Degree	**€ 219.95**
707229	White	NW	12400 lm	70.0 W	30 Degree	**€ 219.95**

IP40 EL 05

Accessories

930915	Sanotrunk Universal Lense, Set 5 pcs, 30 degree	**€ 23.95**
930916	Sanotrunk Universal Lense, Set 5 pcs, 60 degree	**€ 23.95**
930917	Sanotrunk Universal Lense, Set 5 pcs, 90 degree	**€ 23.95**
930918	Sanotrunk Universal Lense, Set 5 pcs, 25 degree, single side asymmetrical	**€ 23.95**
930919	Sanotrunk Universal Lense, Set 5 pcs, 25 degree, double side asymmetrical	**€ 23.95**
930920	Sanotrunk universal dummy cover, shortenable, PC	**€ 15.95**
930922	Sanotrunk Universal Blind Cover Aluminium	**€ 31.95**
930921	Sanotrunk universal mounting clips for blind cover, can be shortened 2 pcs.	**€ 3.95**
930931	Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.	**€ 3.95**
930932	Sanotrunk universal mounting clamps Regent ICE 2 pcs.	**€ 3.95**
930933	Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.	**€ 3.95**
930923	Sanotrunk Universal Power feed socket WAGO 267-501	**€ 9.95**
930924	Sanotrunk Universal Power supply plug WAGO 267-510	**€ 9.95**
930926	Sanotrunk Universal Power supply socket DALI wired WAGO 267-501	**€ 11.95**
930928	Sanotrunk Universal Power supply plug DALI wired WAGO 267-510	**€ 13.95**
930930	Connector, Sanotrunk Universal	**€ 39.95**

NEW · BEG · Phase · power switch · Ra>90 · SDCM<3 · UGR<22

SANOTRUNK UNIVERSAL SPOT

- **Refurbishment solution for T5/T8 trunking systems**
- **Further use of existing trunking possible**
- **Simple, quick and safe installation**
- **Compatible with leading manufacturers**
- **BEG eligible**
- **Emergency power capable**
- **Can be customised to lighting scenarios**
- **Reflector can be replaced**
- **ideal for promotional displays or shelf end caps**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	4000 K	Light Beam Angle	36 Degree
Length	764 mm	Rotation Angle	355 Degree
Width	65 mm	Swivelling Angle	90 Degree
Height	144 mm	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK04



707274

Article	Housing Color		Luminous Flux	Power Selectable	Price
707274	White	NW	4260 lm	30 / 28 / 26 / 24 / 22 / 20 / 18 / 16 / 14 / 12 W	**€ 143.95**
707277	White	NW	8580 lm	60 / 58, / 56 / 54 / 52 / 50 / 48 / 46 / 44 / 42 / 40 / 38 / 30 W	**€ 231.95**

IP40 · EL

Accessories

931170	Sanotrunk Universal Spot, reflector 15 degrees	**€ 5.45**
931171	Sanotrunk Universal Spot, reflector 24 degrees	**€ 5.45**
931172	Sanotrunk Universal Spot, reflector 36 degrees	**€ 5.45**
930923	Sanotrunk Universal Power feed socket WAGO 267-501	**€ 9.95**
930924	Sanotrunk Universal Power supply plug WAGO 267-510	**€ 9.95**
930925	Sanotrunk Universal Power supply socket On/Off wired WAGO 267-501	**€ 11.95**
930927	Sanotrunk Universal Power supply plug On/Off wired WAGO 267-510	**€ 13.95**
930931	Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.	**€ 3.95**
930932	Sanotrunk universal mounting clamps Regent ICE 2 pcs.	**€ 3.95**
930933	Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.	**€ 3.95**

NEW · BEG · DALI · Phase · power switch · Ra>90 · SDCM<3 · UGR<22

SANOTRUNK UNIVERSAL SPOT DALI

- **Refurbishment solution for T5/T8 trunking systems**
- **Further use of existing trunking possible**
- **Simple, quick and safe installation**
- **Compatible with leading manufacturers**
- **BEG eligible**
- **Emergency power capable**
- **Can be customised to lighting scenarios**
- **Reflector can be replaced**
- **with Intelli-Data: Dali Parts 251, 252, 253 for luminaire, energy and maintenance data**
- **ideal for promotional displays or shelf end caps**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

Housing	Aluminium	Rotation Angle	355 Degree
Colour Temperature	4000 K	Swivelling Angle	90 Degree
Length	764 mm	Control	DALI 2 / DT6, Intelli Push-Dim
Width	65 mm		
Height	144 mm	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK04
Light Beam Angle	36 Degree		



707280

Article	Housing Color		Lum. Flux	Power Selectable	Rated Input Voltage	Price
707280	White	NW	4260 lm	30 / 28 / 26 / 24 / 22 / 20 / 18 / 16 / 14 / 12 W	198-264 V/AC	**€ 175.95**
707283	White	NW	8580 lm	60 / 58 / 56 / 54 / 52 / 50 / 48 / 46 / 44 / 42 / 40 / 38 / 36 W	180-264 V/AC	**€ 263.95**

IP40 · EL

Accessories

931170	Sanotrunk Universal Spot, reflector 15 degrees	**€ 5.45**
931171	Sanotrunk Universal Spot, reflector 24 degrees	**€ 5.45**
931172	Sanotrunk Universal Spot, reflector 36 degrees	**€ 5.45**
930923	Sanotrunk Universal Power feed socket WAGO 267-501	**€ 9.95**
930924	Sanotrunk Universal Power supply plug WAGO 267-510	**€ 9.95**
930926	Sanotrunk Universal Power supply socket DALI wired WAGO 267-501	**€ 11.95**
930928	Sanotrunk Universal Power supply plug DALI wired WAGO 267-510	**€ 13.95**
930931	Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.	**€ 3.95**
930932	Sanotrunk universal mounting clamps Regent ICE 2 pcs.	**€ 3.95**
930933	Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.	**€ 3.95**

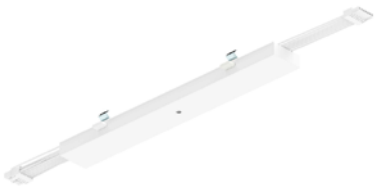

SANOTRUNK UNIVERSAL SENSOR AND DEVICE CARRIER

- **Accessory mounting up to 9kg [sensor, camera, shield]**
- **for electrical or mechanical accessories**
- **Integrated connection terminals for electrical accessories**
- **compatible with common motion, presence and daylight sensors [not included]**

Housing	Aluminium	Height	0.3 mm
Length	51 mm	Rated Input Voltage	180-264 V/AC
Width	6.6 mm	IK Protection Class	IK04

Article	Housing Color	Price
931168	White	**€ 59.95**

IP40

Accessories

930931	Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.	**€ 3.95**
930932	Sanotrunk universal mounting clamps Regent ICE 2 pcs.	**€ 3.95**
930933	Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.	**€ 3.95**
930923	Sanotrunk Universal Power feed socket WAGO 267-501	**€ 9.95**
930924	Sanotrunk Universal Power supply plug WAGO 267-510	**€ 9.95**
930925	Sanotrunk Universal Power supply socket On/Off wired WAGO 267-501	**€ 11.95**
930927	Sanotrunk Universal Power supply plug On/Off wired WAGO 267-510	**€ 13.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

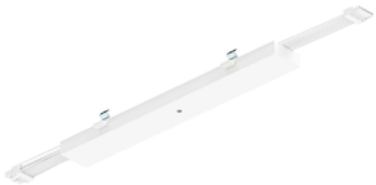

SANOTRUNK UNIVERSAL DALI SENSOR AND DEVICE CARRIER

- **Accessory mounting up to 9kg [sensor, camera, shield]**
- **for electrical or mechanical accessories**
- **Integrated connection terminals for electrical accessories**
- **compatible with common motion, presence and daylight sensors [not included]**

Housing	Aluminium	Control	DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i
Length	51 mm		
Width	6.6 mm		
Height	0.3 mm		
Rated Input Voltage	180-264 V/AC	IK Protection Class	IK04

Article	Housing Color	Price
931169	White	**€ 63.95**

IP40

Accessories

930931	Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.	**€ 3.95**
930932	Sanotrunk universal mounting clamps Regent ICE 2 pcs.	**€ 3.95**
930933	Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.	**€ 3.95**
930923	Sanotrunk Universal Power feed socket WAGO 267-501	**€ 9.95**
930924	Sanotrunk Universal Power supply plug WAGO 267-510	**€ 9.95**
930926	Sanotrunk Universal Power supply socket DALI wired WAGO 267-501	**€ 11.95**
930928	Sanotrunk Universal Power supply plug DALI wired WAGO 267-510	**€ 13.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

SANOTRUNK TRUNKING SYSTEM

components	illust.	item	page
mounting rail L: 1500 mm	01	**930946**	257
mounting rail L: 3000 mm	01	**930947**	257
feed-in box	02	**931088**	258
end piece	03	**931089**	258
end cap [2 pcs.]	04	**930950**	257
mounting clips for blind cover [2 pcs.]	05	**930921**	257
L-connector left	06	**930954**	259
L-connector right	07	**930955**	259
T-connector left	08	**931090**	260
T-connector right type A	09	**930957**	260
T-connector right type B	10	**931091**	260
T-connector double	11	**930956**	260
X-connector straight	12	**930958**	261
X-connector threefold	13	**930959**	261
cable gland M20	14	**931098**	257
mountg bracket for mounting rail [10 pcs.]	15	**930951**	257
suspension kit 5000 mm for mounting rail [10 pcs.]	16	**930952**	257
bracket chain suspension for mounting rail [10 pcs.]	17	**930953**	257
chain suspension 3000 mm	17	**931087**	257
holder for chain suspension for connector [10 pcs.]	18	**931086**	259

ILLUSTRATION OF THE COMPONENTS

01

02

03

04

05


06


07


08


09


10


11


12


13


14

15

16


17


18

MOUNTING POINTS

1528 mm INSTALLATION

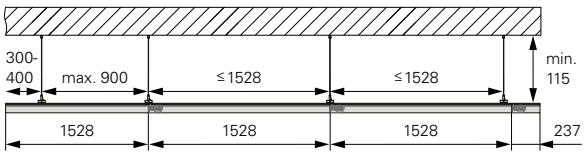

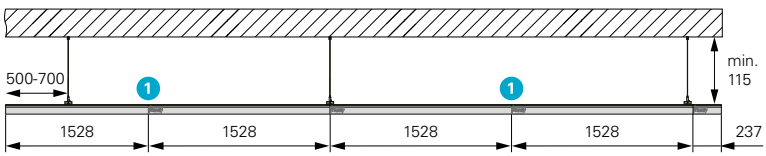

1 Before assembly, join two 1.5-metre mounting rails securely and treat them as a single 3-metre support rail from then on.

3056 mm INSTALLATION

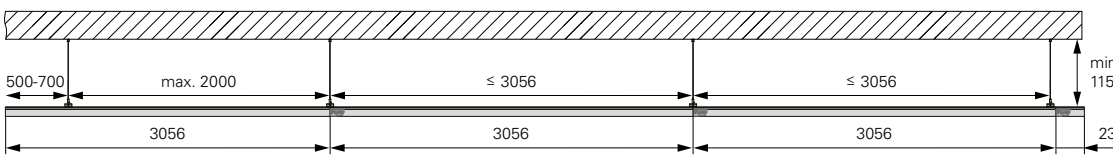

INSTALLATION OF THE LIGHT FITTINGS

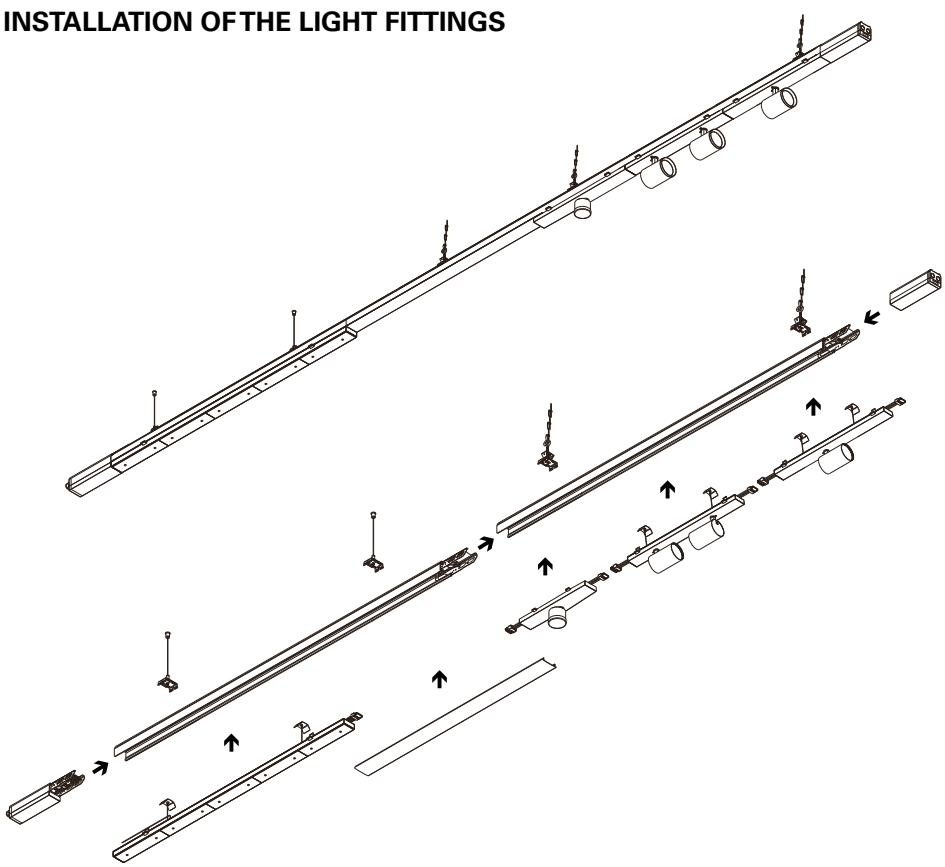

PLANNING GUIDE

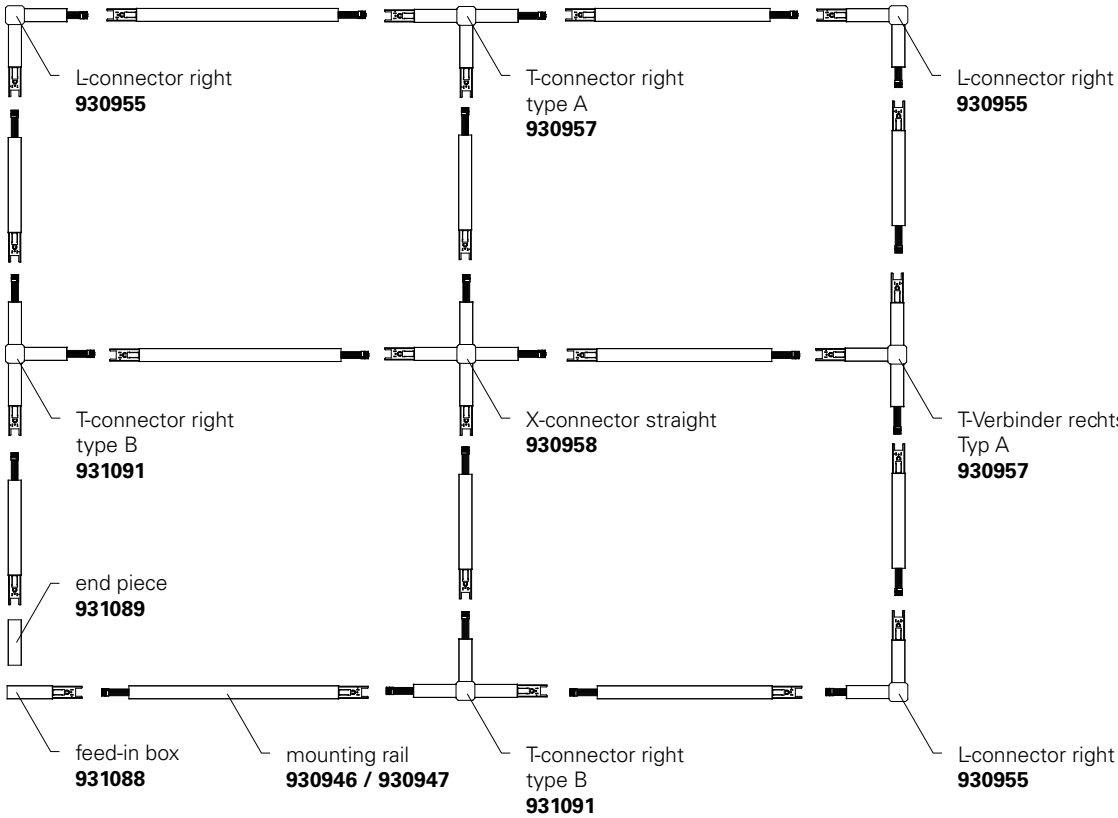

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

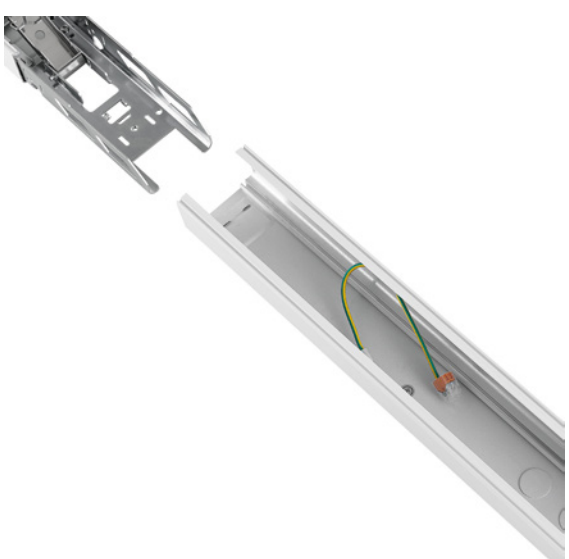

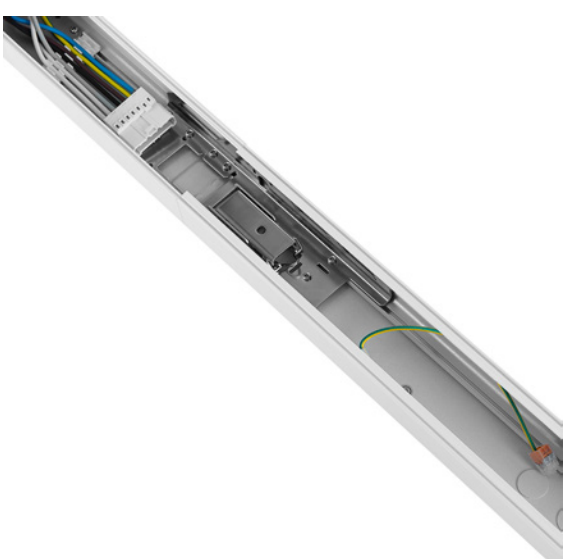

SANOTRUNK MOUNTING RAILS

Housing	Steel	Height	45 mm
Width	65 mm		

Article	Housing Color	Length	Price
930946	White	1528 mm	**€ 19.95**
930947	White	3056 mm	**€ 33.95**

Accessories

930951	Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.	**€ 13.95**
930952	Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.	**€ 71.95**
930953	Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs.	**€ 23.95**
930950	Sanotrunk, Endcap for Trunking Rail, Set 2 Pcs.	**€ 4.95**
930948	Sanotrunk, Cover for Trunking Rail 1,5 m	**€ 7.95**
930949	Sanotrunk, Cover for Trunking Rail 3,0 m	**€ 15.95**
931087	Sanotrunk, chain suspension, 3m	**€ 7.95**
931098	Cable gland PG/M20 incl. locknut + sealing ring, IP68	**€ 1.75**

SANOTRUNK UNIVERSAL BLIND COVER

Length	1528 mm

Article	Housing Color	Housing		Width	Height	Price
930922	White	Aluminium		65.6 mm	26 mm	**€ 31.95**
930920	White	Polycarbonate	can be shortened	62 mm	19.2 mm	**€ 15.95**

Accessories for **930920**

930921	Sanotrunk universal mounting clips for blind cover, can be shortened 2 pcs.	**€ 3.95**

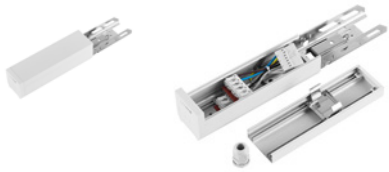

SANOTRUNK FEED-IN BOX + END PIECE

Housing	Aluminium	Control	DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i
Width	64.7 mm		
Height	65.5 mm		

Article	Housing Color	Type	Length	Price
931088	White	feed piece including integrated connection block	383.1 mm	**€ 33.95**
931089	White	end piece	237.1 mm	**€ 15.95**

Accessories

930951	Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.	**€ 13.95**
930952	Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.	**€ 71.95**
930953	Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs.	**€ 23.95**
931087	Sanotrunk, chain suspension, 3m	**€ 7.95**
931098	Cable gland PG/M20 incl. locknut + sealing ring, IP68	**€ 1.75**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

SANOTRUNK L-CONNECTOR

- **Pre-wiring with 7 cores, incl. DALI cables**
- **suitable for DALI and ON / OFF**

Housing	Aluminium	Control	DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i
Length	304.3 mm		
Width	304.3 mm		
Height	73 mm		

Article	Housing Color	Type	Price
930954	White	left	**€ 63.95**
930955	White	right	**€ 65.95**

Accessories

930951	Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.	**€ 13.95**
930952	Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.	**€ 71.95**
930953	Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs.	**€ 23.95**
931086	Sanotrunk, set of 10 pcs. Holder for chain suspension for connector	**€ 9.95**
931087	Sanotrunk, chain suspension, 3m	**€ 7.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

SANOTRUNK T-CONNECTOR

- **Pre-wiring with 7 cores, incl. DALI cables**
- **suitable for DALI and ON / OFF**

Housing	Aluminium	Control	DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i
Length	515.4 mm		
Width	304.3 mm		
Height	73 mm		

Article	Housing Color	Type	Price
931090	White	left	**€ 83.95**
930957	White	right type A	**€ 93.95**
931091	White	right type B	**€ 83.95**
930956	White	double	**€ 91.95**

Accessories

930951	Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.	**€ 13.95**
930952	Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.	**€ 71.95**
930953	Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs.	**€ 23.95**
931086	Sanotrunk, set of 10 pcs. Holder for chain suspension for connector	**€ 9.95**
931087	Sanotrunk, chain suspension, 3m	**€ 7.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.



SANOTRUNK X-CONNECTOR

- **Pre-wiring with 7 cores, incl. DALI cables**
- **suitable for DALI and ON / OFF**

Housing	Aluminium	Control	DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i
Length	515.4 mm		
Width	515.4 mm		
Height	73 mm		

Article	Housing Color	Type	Price
930958	White	straight	**€ 119.95**
930959	White	dreifach	**€ 123.95**

Accessories

930951	Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.	**€ 13.95**
930952	Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.	**€ 71.95**
930953	Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs.	**€ 23.95**
931086	Sanotrunk, set of 10 pcs. Holder for chain suspension for connector	**€ 9.95**
931087	Sanotrunk, chain suspension, 3m	**€ 7.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

POWER RAILS

266 D ONE 1-phase power rail system
286 1-phase power rail luminaires
302 D LINE 3-phase power rail system
334 D LINE DALI 3-phase power rail system
364 power rail luminaires

D ONE system

page 270

page 273

page 274

page 274

page 275

page 275

page 276

page 276

page 277

page 277

page 278

page 278

page 279



page 280

page 280

page 281

page 282

page 282

page 283

page 283

D ONE MOUNTING POWER RAIL SYSTEM 1-PHASE 230V

mounting modules	illust.	white	black	page
mounting power rail L: 1000 mm	01	**720000**	**720003**	271
mounting power rail L: 2000 mm	01	**720001**	**720004**	271
mounting power rail L: 3000 mm	01	**720002**	**720005**	271
mounting power rail curved 90° left	01	**720042**	**720044**	273
mounting power rail curved 90° right	01	**720043**	**720045**	273
feeder left	02	**720006**	**720007**	274
feeder right	03	**720008**	**720009**	274
flex feeder with ceiling canopy	04	**720010**	**720011**	275
electrical straight connector with center feed option	05	**720012**	**720013**	275
electrical connector	06	**720014**	**720015**	276
90°-joint left	07	**720016**	**720017**	276
90°-joint right	08	**720018**	**720019**	277
T-joint left-right-right	09	**720020**	**720021**	277
T-joint right-right-left	10	**720022**	**720023**	278
T-joint left-left-right	11	**720024**	**720025**	279
T-joint right-left-left	12	**720026**	**720027**	278
X-joint left-left-right-right	13	**720028**	**720029**	279
endcap	14	**720030**	**720031**	280
cover panel	15	**720038**	**720039**	280
ceiling mounting bracket flex	16	**720032**	**720033**	282
wall bracket	17	**720040**	**720041**	282
wire suspension bracket 3000 mm	18	**720034**	**720035**	283
wire suspension bracket curved 3000 mm	19	**720046**	**720047**	283
1-phase adapter for light installation	20	**720036**	**720037**	281

ILLUSTRATIONS WITH PLANNING-RELEVANT DIMENSIONS

01


02

03

04


05


06

07


08


09


10


11


12


13


14

15

16


17


18


19


20


FIXING POINTS

power rail	a	b	c	d
1000 mm	125 mm			
2000 mm	125 mm	870 mm		
3000 mm	125 mm		790 mm	1160 mm

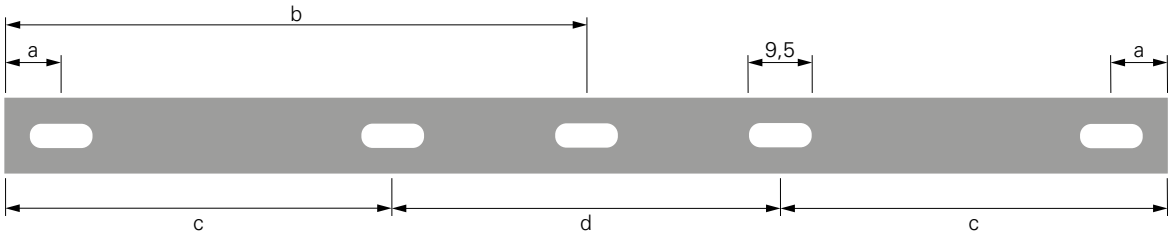

MECHANICAL LOAD TRACK POWER RAIL 1000 MM

10 N ≙ 1,02 kg
dimension in mm

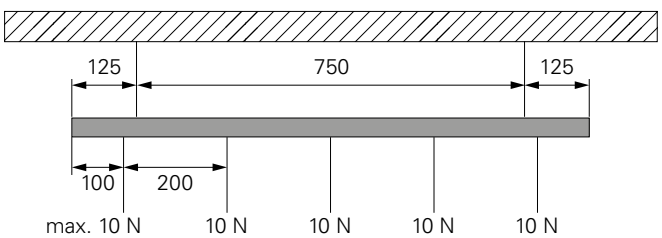

MECHANICAL LOAD TRACK POWER RAIL 2000MM

10 N ≙ 1,02 kg
dimension in mm

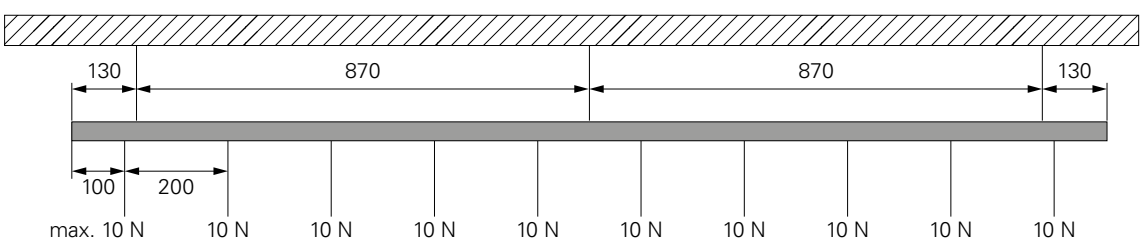

MECHANICAL LOAD TRACK POWER RAIL 3000MM

10 N ≙ 1,02 kg
dimension in mm

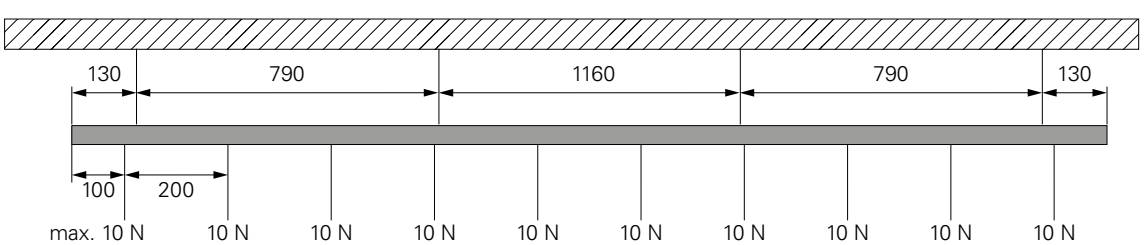

PLANNING GUIDE D ONE TRACK SYSTEM 1-PHASE 230V



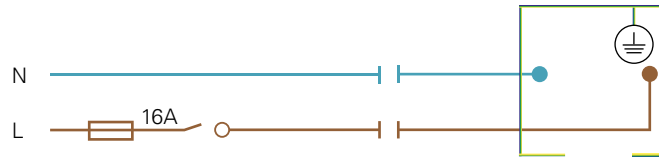

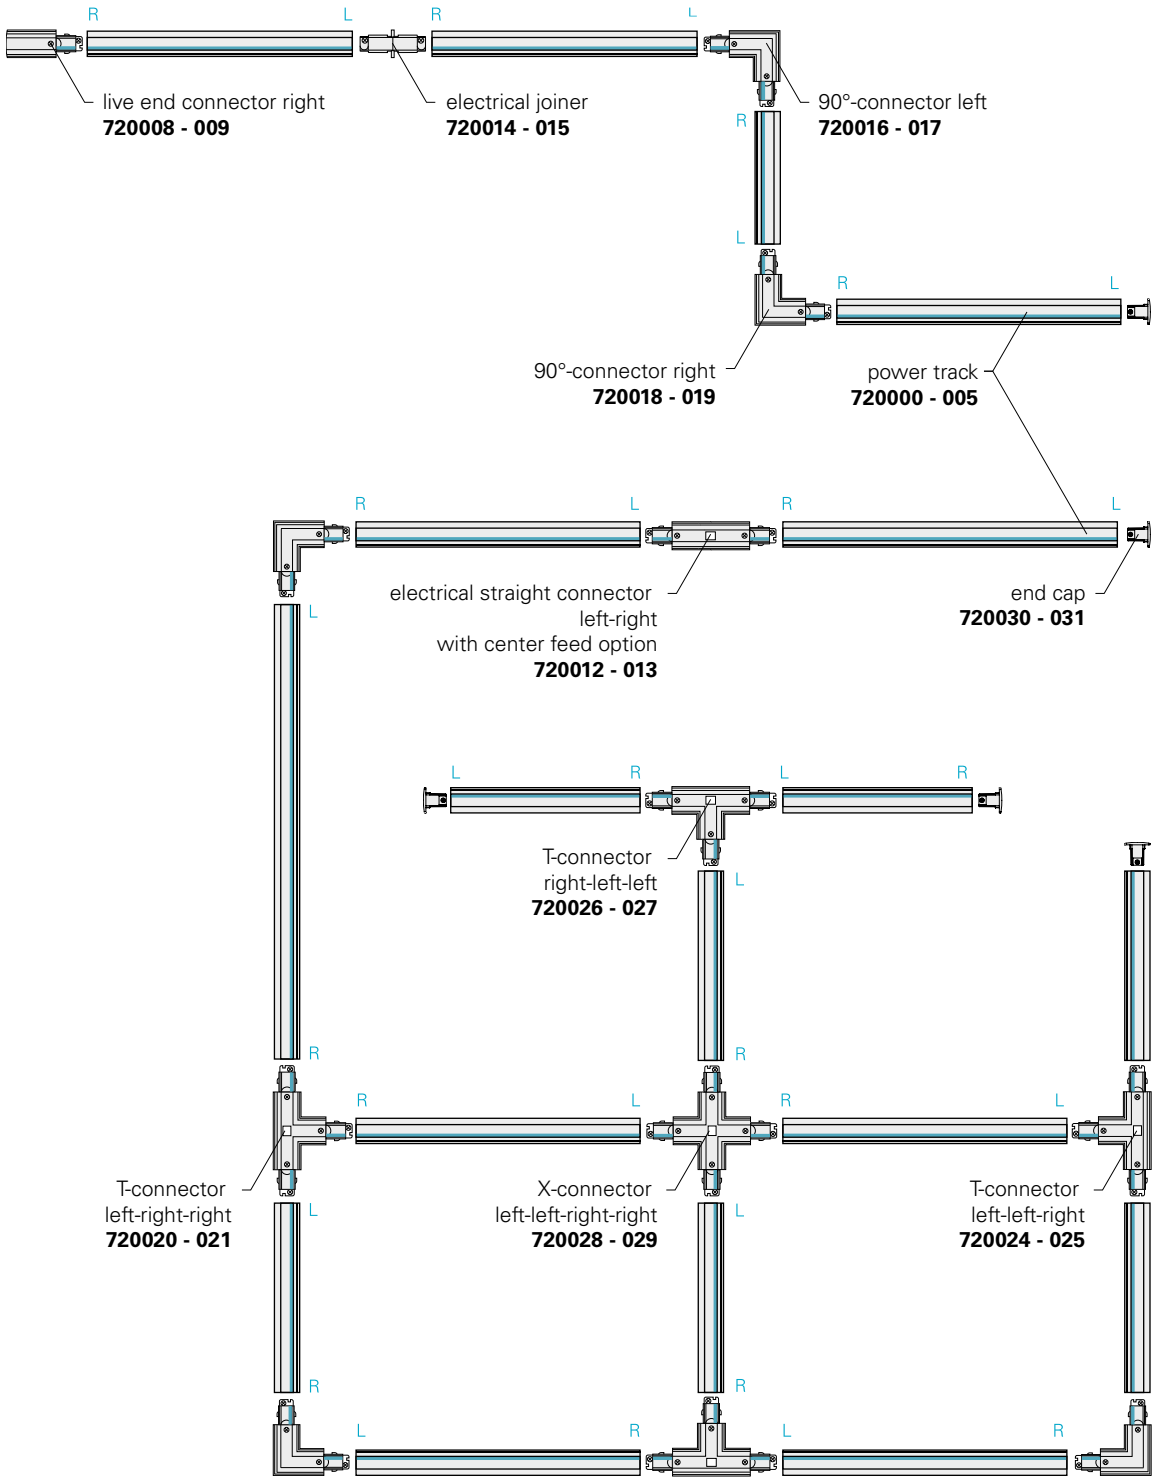

D ONE SURFACE-MOUNTED POWER TRACK

D ONE is the single-phase, 230 V busbar system from DEKO-LIGHT. This extremely compact and sophisticated system combines the benefits of 48 V low-voltage busbars [slim design] with the practical advantages of fully fledged 230 V systems [no transformer required for operation]. Their small size allows all D ONE components to integrate seamlessly into an extremely wide variety of environments, adding a timeless, understated, premium look to private dwellings and commercial facilities like shops and bars. All D ONE components are available in the universally suitable colours black and white, allowing a wide variety of installation options for flexible and universal use. The flexible infeed with ceiling canopy even allows D ONE busbars to be installed in places where there is no power supply available in the immediate vicinity.

D ONE SURFACE-MOUNTED POWER TRACK

- **elegant and compact mini design**
- **easy to install**
- **many different designs available**
- **Mini design with one current phase**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Width	26.2 mm	Output Current	16 A
Height	22.2 mm		

Article	Housing Color	Length	Price
720000	White	1000 mm	**€ 31.95**
720003	Black	1000 mm	**€ 31.95**
720001	White	2000 mm	**€ 55.95**
720004	Black	2000 mm	**€ 55.95**
720002	White	3000 mm	**€ 79.95**
720005	Black	3000 mm	**€ 79.95**

IP20

Accessories for **720000**, **720001**, **720002**
720038 D One cover panel for integrated busbar, white **€ 4.95**

Accessories for **720003**, **720004**, **720005**
720039 D One cover panel for integrated busbar, black **€ 4.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

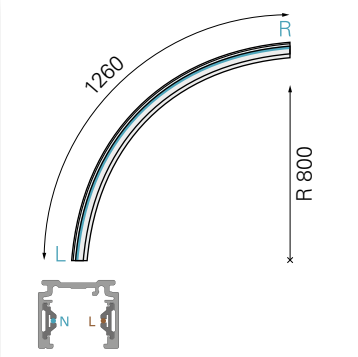

720042, 720044

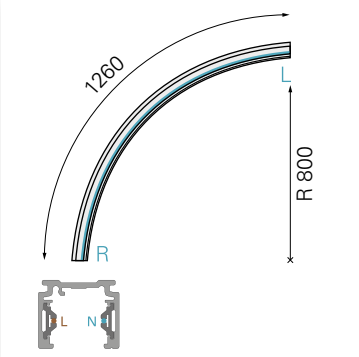

720043, 720045

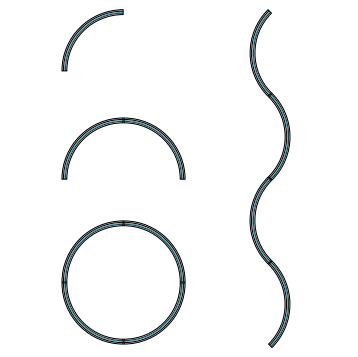

examples of designs

D ONE SURFACE-MOUNTED POWER TRACK CURVED

- **Curved track 90° (radius 0.8m)**
- **Enables completely new design shapes (corner, semicircle, circle, wave)**
- **Segment length 1.26m**
- **Only suitable for standard track adapters (max. length 8cm)**
- **Mini design with one power phase**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	26.2 mm
Length	1260 mm	Rated Input Voltage	220-240 V/AC
Width	22.2 mm	Output Current	16 A

Article	Housing Color		Price
720042	White	left	**€ 67.95**
720044	Black	left	**€ 67.95**
720043	White	right	**€ 67.95**
720045	Black	right	**€ 67.95**

IP20

Accessories for **720042**, **720043**

720032	D One ceiling mounting bracket Flex, white	**€ 4.95**
720046	D One CURVED suspension bracket with 3 m cable, white	**€ 13.95**

Accessories for **720044**, **720045**

720033	D One ceiling mounting bracket Flex, black	**€ 4.95**
720047	D One CURVED suspension bracket with 3 m cable, black	**€ 13.95**

D ONE ELECTRIC FEEDER LEFT

- **Power can be fed in from above (ceiling) or from the side**
- **Elegant and compact mini design**
- **Simple installation**
- **Enables flexible installation options**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	71 mm	Rated Input Voltage	220-240 V/AC
Width	26 mm	Output Current	16 A

Article	Housing Color	Price
720006	White	**€ 10.95**
720007	Black	**€ 10.95**

IP20

D ONE ELECTRIC FEEDER RIGHT

- **Power can be fed in from above (ceiling) or from the side**
- **elegant and compact mini design**
- **easy to install**
- **enables flexible installation options**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	71 mm	Rated Input Voltage	220-240 V/AC
Width	26 mm	Output Current	16 A

Article	Housing Color	Price
720008	White	**€ 10.95**
720009	Black	**€ 10.95**

IP20

D ONE FLEX FEEDER WITH CEILING CANOPY

- **Elegant and compact mini design**
- **Easy to install**
- **Power supply via ceiling baldachin/current track adapter (200-1,000 mm)**
- **Enables various installation options**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic, Metal	Rated Input Voltage	220-240 V/AC
Length	1000 mm	Output Current	6 A
Width	120 mm	Connected Load max.	1320 W
Height	28 mm		

Article	Housing Color	Price
720010	White	**€ 31.95**
720011	Black	**€ 31.95**

IP20

D ONE ELECTRICAL STRAIGHT CONNECTOR WITH FEED OPTION

- **Elegant and compact mini design**
- **Easy to install**
- **Power supply from above (from ceiling)**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	26 mm	Output Current	16 A

Article	Housing Color	Price
720012	White	**€ 19.95**
720013	Black	**€ 19.95**

IP20

D ONE MINI-STRAIGHT CONNECTOR

- **elegant and compact mini design**
- **easy to install**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22 mm
Length	62 mm	Rated Input Voltage	220-240 V/AC
Width	26 mm	Output Current	16 A

Article	Housing Color	Price
720014	White	**€ 7.45**
720015	Black	**€ 7.45**

IP20



D ONE 90°-CONNECTOR LEFT

- **Optional power supply from above (from ceiling)**
- **Elegant and compact mini design**
- **Easy to install**
- **Many different design shapes possible**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	73 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720016	White	**€ 19.95**
720017	Black	**€ 19.95**

IP20



D ONE 90°-CONNECTOR RIGHT

- **Optional power supply from above (from ceiling)**
- **Elegant and compact mini design**
- **Easy to install**
- **Many different design shapes possible**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	73 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720018	White	**€ 19.95**
720019	Black	**€ 19.95**

IP20



D ONE T-CONNECTOR RIGHT-LEFT-LEFT

- **Optional power supply from above (from ceiling)**
- **Elegant and compact mini design**
- **Easy to install**
- **Many different design shapes possible**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720026	White	**€ 27.95**
720027	Black	**€ 27.95**

IP20



D ONE T-CONNECTOR RIGHT-RIGHT-LEFT

- **Optional power supply from above (from ceiling)**
- **Elegant and compact mini design**
- **Easy to install**
- **Many different design shapes possible**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720022	White	**€ 27.95**
720023	Black	**€ 27.95**

IP20



D ONE T-CONNECTOR LEFT-RIGHT-RIGHT

- **Power can be fed in from above [via ceiling]**
- **Elegant and compact mini design**
- **Easy to install**
- **Enables many different design shapes**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720020	White	**€ 27.95**
720021	Black	**€ 27.95**

IP20



D ONE T-CONNECTOR LEFT-LEFT-RIGHT

- **Power can be fed in from above [via ceiling]**
- **Elegant and compact mini design**
- **Easy to install**
- **Enables many different design shapes**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720024	White	**€ 27.95**
720025	Black	**€ 27.95**

IP20



D ONE X-CONNECTOR

- **Power can be fed in from above [via ceiling]**
- **Easy to install**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	121 mm	Output Current	16 A

Article	Housing Color	Price
720028	White	**€ 37.95**
720029	Black	**€ 37.95**

IP20

D ONE COVER PANEL

- **suitable for D-One surface-mounted system**
- **for covering live busbars < 2.30 m high (contact zone)**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	16.5 mm
Length	1000 mm	Height	6.8 mm

Article	Housing Color	Price
720038	White	**€ 4.95**
720039	Black	**€ 4.95**



D ONE END CAP

- **Current touch protection**
- **For closing open current track ends**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	26 mm
Length	15 mm	Height	22.2 mm

Article	Housing Color	Price
720030	White	**€ 3.45**
720031	Black	**€ 3.45**

D ONE 1-PHASE ADAPTER FOR LIGHT INSTALLATION

- **Elegant and compact mini design**
- **Easy to install**
- **230 V adapter for converting lights**
- **Delivery incl. mounting material (reduction bush, flat M10 nut, strain relief)**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic, Metal	Rated Input Voltage	220-240 V/AC
Length	70 mm	Output Current	6 A
Width	26 mm	Loading Weight max.	10 kg
Height	30 mm	Load Force max.	100 N

Article	Housing Color	Price
720036	White	**€ 13.95**
720037	Black	**€ 13.95**

IP20

D ONE MOUNTING BRACKET FLEX

- **Simplifies the installation of more complex track shapes**
- **Enables numerous design forms**
- **Expands options for installation**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Height	10.5 mm
Length	30 mm	Loading Weight max.	25 kg
Width	28 mm		

Article	Housing Color	Price
720032	White	**€ 4.95**
720033	Black	**€ 4.95**

NEW

D ONE WALL BRACKET

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	80 mm
Length	91.9 mm	Loading Weight max.	10 kg
Width	25 mm		

Article	Housing Color	Price
720040	White	**€ 11.95**
720041	Black	**€ 11.95**

IP20

D ONE ROPE SUSPENSION BRACKET

- **Stylish and sophisticated suspended mounting**
- **Enables numerous design forms**
- **Expands options for installation**
- **Can be cut to length for hanger lengths: 70-3,020 mm**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Height	3020 mm
Length	120 mm	Loading Weight max.	25 kg
Width	28 mm		

Article	Housing Color	Price
720034	White	**€ 15.95**
720035	Black	**€ 15.95**



D ONE ROPE SUSPENSION BRACKET CURVED

Housing	Metal	Height	3020 mm
Length	30 mm	Loading Weight max.	8 kg
Width	28 mm		

Article	Housing Color	Price
720046	White	**€ 13.95**
720047	Black	**€ 13.95**

1-phase power rail luminaires

page 287

page 289

page 292

page 294

page 295

page 296

page 297

CAN

- **Replaceable light source to offer an individual lighting solution**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium, Polycarbonate	Rated Input Voltage	220-240 V/AC
Height	134 mm	Control	Dimmable via optional light source
Ø	60 mm	Rotation Angle	350 Degree
Max. Power	1x max. 7.5 W	Swivelling Angle	90 Degree

Article	Housing Color	Price
707155	White	**€ 33.95**
707156	Black	**€ 33.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

page 30

page 68

page 72

page 167

page 184

page 382

page 467

CAN

- **customisable with extensive accessories**
- **customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Ø	60 mm	Control	Dimmable via optional light source
Pendulum Length	1500 mm		
Max. Power	1x max. 7.5 W		

Article	Housing Color	Height	Price
707253	White	150 mm	**€ 61.95**
707254	Black	150 mm	**€ 61.95**
707257	White	350 mm	**€ 73.95**
707258	Black	350 mm	**€ 73.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**



CAN BASE MIX'N MATCH 1/3

- **customised lighting solution thanks to interchangeable light source**
- **can be customised with cylinder housing in 6 different colours**
- **can be combined with the extensive product family of the CAN series**

Housing	Aluminium	Control	Dimmable via optional light source
Height	74 mm	Rotation Angle	350 Degree
Ø	70 mm	Swivelling Angle	90 Degree
Max. Power	1x max. 7.5 W		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Price
707249	White	**€ 28.95**
707250	Black	**€ 28.95**

GU10 IP20

2/3

CYLINDER HOOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	98 mm		

Article	Housing Color	Price
931053	White	**€ 6.45**
931054	Black	**€ 6.45**
931055	Bronze	**€ 14.95**
931056	Brass	**€ 14.95**
931057	Black grey	**€ 14.95**
931058	Rosé	**€ 14.95**

IP20

3/3

REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 3.95**
930302	Black	**€ 3.95**
930303	Gold	**€ 3.95**
930366	Silver	**€ 3.95**

IP20

UNI 2 MINI

The UNI 2 MINI is a compact and flexibly customisable single-circuit track luminaire for professional lighting concepts. The rotatable and swivelling LED spot impresses with its decorative "glow" effect on the reflector ring and numerous customisation options using interchangeable reflectors, lenses, reflector rings and accessories. Ideal for living areas, reception areas, hotels and the catering trade.

page 57

page 124

Ra>90 SDCM<3

UNI 2 MINI

- **„Glow“ effect on the reflector ring**
- **Rotatable and swivelling**
- **Can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium, Steel, Polycarbonate	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Height	128 mm	Rotation Angle	350 Degree
Ø	75 mm	Swivelling Angle	90 Degree
Power	11.3 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90



707187

Article	Housing Color		Luminous Flux	Price
707188	Black	WW	700 lm	**€ 110.95**
707187	White	WW	730 lm	**€ 110.95**

CC IP20

Accessories

930327	Rear black cover for Uni II Mini series	**€ 2.95**
930328	White heat sink cover for Uni II Mini series	**€ 2.95**
930329	Black heat sink cover for Uni II Mini series	**€ 2.45**
930330	Reflector ring white for Uni II Mini series	**€ 8.95**
930331	Reflector ring black for Uni II Mini series	**€ 8.95**
930332	Reflector ring gold for Uni II Mini series	**€ 8.95**
930333	Reflector ring chrome for Uni II Mini series	**€ 8.95**
930770	Reflector 24° for Uni II Mini series	**€ 8.95**
930771	Reflector 48° for Uni II Mini series	**€ 8.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

Ra>90 UGR<19

SLIM

- **glare-free thanks to low UGR value (<19)**
- **slim design with just 39 mm diameter**
- **incl. silver-coloured reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Luminous Flux	500 lm	Rotation Angle	330 Degree
Height	197 mm	Swivelling Angle	60 Degree
Ø	39 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Power	5 W		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90



707201

Article	Housing Color		Price
707201	White	WW	**€ 66.95**
707202	Black	WW	**€ 66.95**

Accessories

930744	Reflector ring white for Slim series	**€ 3.95**
930745	Reflector ring black for Slim series	**€ 3.95**
930746	Reflector ring gold-coloured for Slim series	**€ 4.75**
930747	24° lens for Slim series	**€ 3.95**
930748	36° lens for Slim series	**€ 3.95**
930749	60° lens for Slim series	**€ 3.95**

page 24 page 295 page 408

Ra>90 UGR<19

SLIM

- **Extra-soft fabric cable**
- **Glare-free, due to low UGR value [<19]**
- **Slim design at just 39 mm in diameter**
- **Max. suspended mounting: 1,800 mm**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	2700 K	Power Supply Unit incl.	Yes
Luminous Flux	500 lm	Light Beam Angle	24 Degree
Height	300 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	39 mm		
Pendulum Length	1800 mm	CRI (Ra)	90
Power	5 W		



707163

Article	Housing Color		Price
707163	Black	WW	**€ 74.95**
707164	White	WW	**€ 74.95**

IP20

Accessories

930744	Reflector ring white for Slim series	**€ 3.95**
930745	Reflector ring black for Slim series	**€ 3.95**
930746	Reflector ring gold-coloured for Slim series	**€ 4.75**
930747	24° lens for Slim series	**€ 3.95**
930749	60° lens for Slim series	**€ 3.95**
930748	36° lens for Slim series	**€ 3.95**

page 24

page 408

Ra>90 SDCM<5

LUCEA

- **incl. black reflector ring**
- **Can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Rotation Angle	350 Degree
Colour Temperature	2700 K	Swivelling Angle	90 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm		
Rated Input Voltage	200-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK03
Light Beam Angle	36 Degree		



707165

Article	Housing Color		Luminous Flux	Power	Price
707165	White	WW	800 lm	6.0 W	**€ 72.95**
707166	Black	WW	800 lm	6.0 W	**€ 72.95**
707167	White	WW	1300 lm	10.0 W	**€ 77.95**
707168	Black	WW	1300 lm	10.0 W	**€ 77.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 28

page 64

page 65

page 297

Ra>90 SDCM<5

LUCEA

- **Particularly soft textile cable**
- **incl. black reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm		
Pendulum Length	1600 mm	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03



707175

Article	Housing Color		Luminous Flux	Power	Price
707175	White	WW	800 lm	6.0 W	**€ 96.95**
707176	Black	WW	800 lm	6.0 W	**€ 96.95**
707177	White	WW	1300 lm	10.0 W	**€ 99.95**
707178	Black	WW	1300 lm	10.0 W	**€ 99.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 28

page 64

page 65

page 296

dtw Ra>90

LUCEA DTW

- **Dim-to-warm 1,800K - 2,700K**
- **incl. black reflector ring**
- **Can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium
Colour Temperature	1800-2700 K
Luminous Flux	750 lm
Height	249 mm
Ø	65 mm
Power	10 W
Rated Input Voltage	200-240 V/AC
Power Supply Unit incl.	Yes

Light Beam Angle	36 Degree
Rotation Angle	350 Degree
Swivelling Angle	90 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	90
IK Protection Class	IK03



707211

Article	Housing Color		Price
707211	White	WW	**€ 83.95**
707212	Black	WW	**€ 83.95**

Accessories

930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 26

page 60

page 62

dtw Ra>90

LUCEA DTW

- **high colour rendering**
- **Dim-to-warm 1,800K-2,700K**
- **incl. black reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	1800-2700 K	Power Supply Unit incl.	Yes
Luminous Flux	750 lm	Light Beam Angle	36 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm		
Pendulum Length	1800 mm	CRI (Ra)	90
Power	10 W	IK Protection Class	IK03



707215

Article	Housing Color		Price
707215	White	WW	**€ 108.95**
707216	Black	WW	**€ 108.95**

IP20

Accessories

930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 26

page 60

page 62

page 400

page 404

D LINE system

page 310

page 312

page 313

page 314

page 314

page 315

page 315

page 316

page 316

page 317

page 318

page 318

page 319

page 320

page 320

page 321

page 321

page 322

page 322

page 323

page 323

page 324

page 324

page 325

page 325

page 326

page 326

page 327

page 328

page 329

page 330

page 331

page 331

page 333

D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V

mounting modules	illust.	white	black	page
mounting power rail L: 1000 mm	01	**710000**	**710002**	311
mounting power rail L: 2000 mm	01	**710003**	**710005**	311
mounting power rail L: 3000 mm	01	**710006**	**710008**	311
mounting power rail curved 90° left	01	**710113**	**710115**	312
mounting power rail curved 90° right	01	**710114**	**710116**	213
mounting adapter for lights	02	**710045**	**710047**	313
live end feeder left	03	**710009**	**710011**	314
live end feeder right side	04	**710012**	**710014**	314
electrical straight connector with center feed option	05	**710042**	**710044**	315
flexible-connector left-right side	06	**710039**	**710041**	315
electrical joint	07	**710015**	**710017**	316
mechanical joint	08	**710018**	**710020**	316
90°-joint left-right with exchange mechanism	09	**710036**	**710038**	317
T-joint left-left-right with exchange mechanism	10	**710027**	**710029**	318
T-joint right-right-left with exchange mechanism	11	**710030**	**710032**	318
X-joint left-left-right-right	12	**710033**	**710035**	319
cover plate built in track	13	**710077**	**710079**	320
endcap	14	**710066**	**710068**	320
ceiling mounting bracket flex	15	**710063**	**710065**	321
suspension clamp for track connection	16	**710057**	**710059**	322
ceiling suspension rigid [635 mm] with canopy	17	**710078**	**710084**	323
extension for ceiling suspension [300 mm]	17	**710086**	**710087**	323
wire suspension bracket with ceiling rosette 1500 mm	18	**710048**	**710050**	324
rope suspension bracket Mini mit Abhängeseil 5000 mm	19	**710094**	**710096**	324
curved suspension cable bracket	20	**710117**	**710118**	325
suspension cable bracket with adjustment crossbar	21	**710110**	**710112**	325
quick mounting bracket for grid ceilings	22	**710051**	**710053**	327
quick mounting bracket for grid ceilings for or mini cable suspension	23	**710108**	**710109**	321
wall bracket	24	**710104**	**710106**	322
truss adapter | silver coloured	25	**-**	**-**	327
quick mounting clamp for exhibition stand construction	26	**-**	**710082**	326
3-circuits adapter for light installation	27	**710097**	**710099**	328
3-circuits adapter with Multi CC power supply 250/350/450/500 mA | 6,30 - 21,00 W | 25-42V	28	**862180**	**862183**	329
3-circuits adapter with Multi CC power supply 600/700/750/800 mA | 15,00 - 33,60 W | 25-42V	28	**862181**	**862184**	329
3-circuits adapter with Multi CC power supply 850/900/950/1050 mA | 23,00 - 44,10 W | 27-42V	28	**862182**	**862185**	329
electrical outlet adapter	29	**710024**	**710026**	330
mounting adapter for additional components max. 10kg	30	**710054**	**710056**	330
signs hook, max. load 5kg	31	**710060**	**710062**	331

Note: Recessed track systems can be found in the D LINE DALI 3-phase power rail luminaires chapter.

ILLUSTRATIONS WITH PLANNING-WRELEVANT DIMENSIONS

01


02


03

04

05


06


07

08

09


10


11


12


13

14

15

16


17


18


19


20


21


22


23

24


25


26

27


28


29


30

31

FIXING POINTS

power rail	a	b	c	d
1000 mm	125 mm			
2000 mm	125 mm	998 mm		
3000 mm	125 mm		914 mm	1167 mm

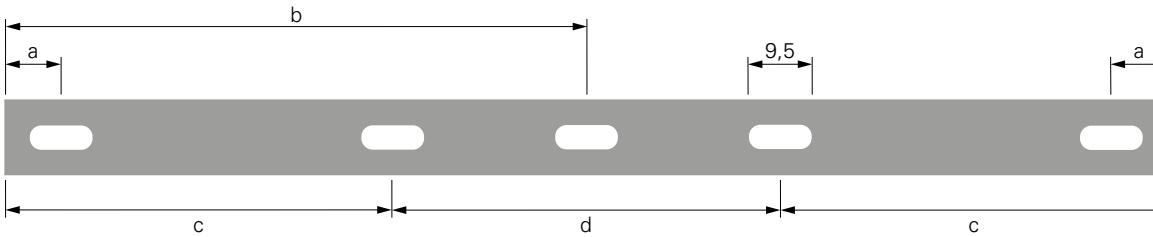

MECHANICAL LOAD TRACK POWER RAIL 1000 MM

50 N ≙ 5,09 kg
dimension in mm

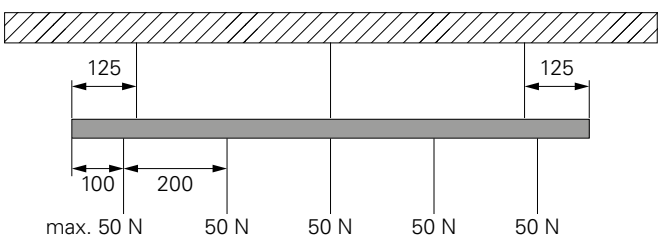

MECHANICAL LOAD TRACK POWER RAIL 2000/3000 MM

50 N ≙ 5,09 kg
dimension in mm

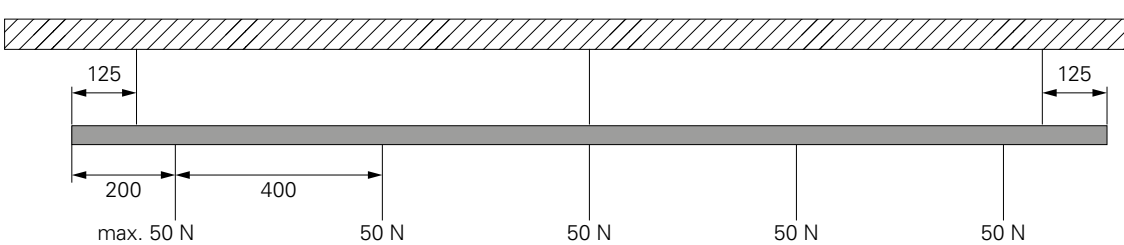

PLANNING GUIDE D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V



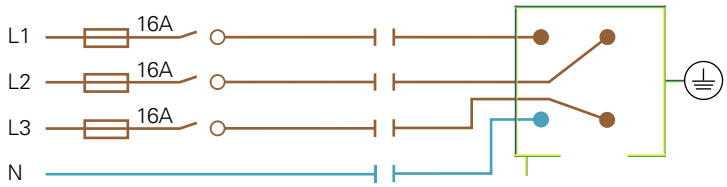

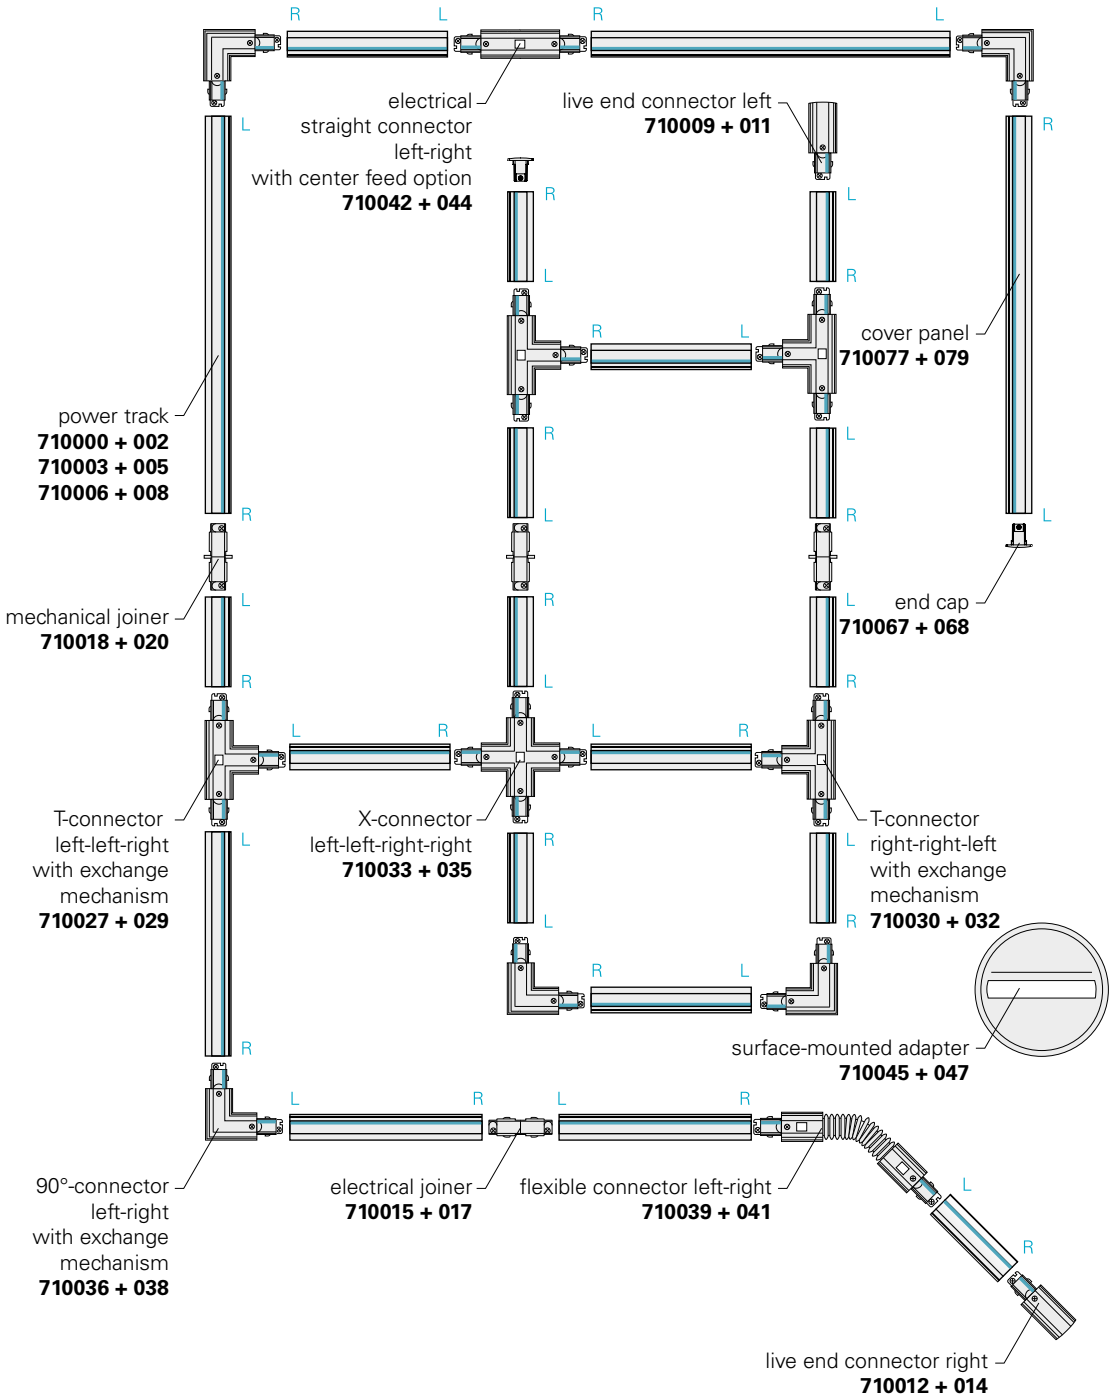

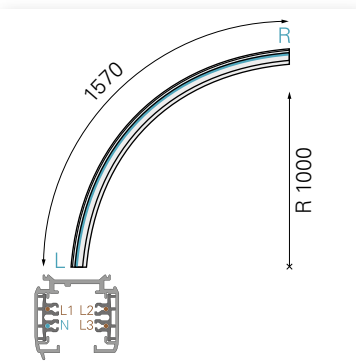

710113, 710115

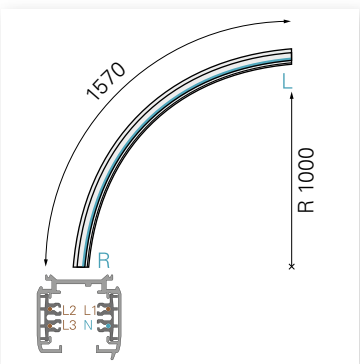

710114, 710116

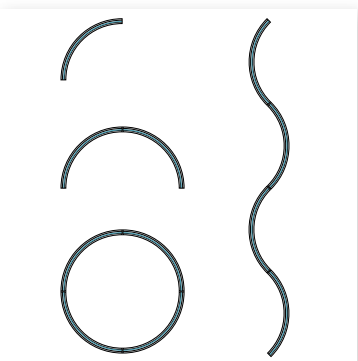

examples of designs

D LINE CURVED

DThe D LINE CURVED track enables completely new design possibilities for modern lighting concepts. Featuring a 90° curve with a 1 m radius, it allows the creation of semicircles, circles and wave-shaped layouts. The 1.57 m segments can be used as either D LINE DALI or D LINE Standard tracks. A variety of mounting options ensures maximum installation flexibility.

D LINE POWER RAIL SYSTEM 3-PHASE 220-440V

The D LINE track system is available exclusively from DEKO-LIGHT and is extremely easy to plan and install thanks to its components, some of which have been completely redesigned. It is also compatible with all common track adapters and luminaires. The elegant and timeless design is available in white, black and grey, and the wide range of accessories and mounting components means that there are no limits to its use and installation. Thanks to the interchangeable mechanism of the 90° and T connectors, planning is easier than ever before and the installation of even complex shapes will be child's play in the future.

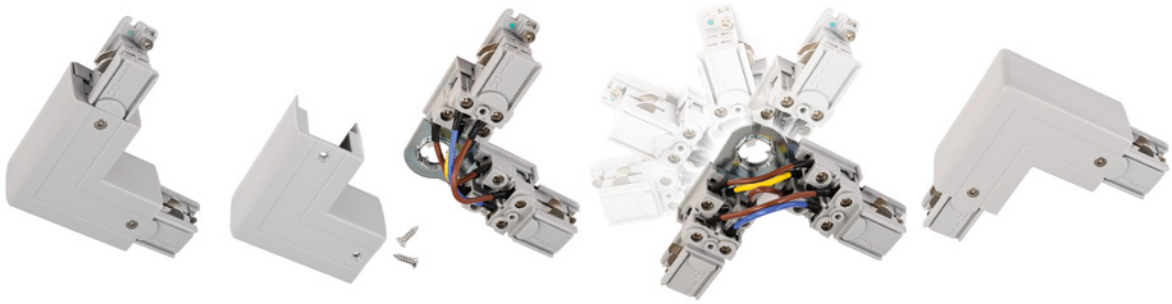

COMPATIBILITY OVERVIEW



D LINE 3-phase track is compatible with the following track lights / adapters:

manufacturer	system name
DEKO-LIGHT	all 3-phase spotlights
Molto Luce	3-Phase-Track*
Global / Nordic	Trac Pro 3*
Ivela	LKM Square / Quadro*
Erco	3-Phasen*
Hoffmeister	3-Phasen*
Zumtobel / Staff	3-Phasen*
Eutrac	One Track*
SLV	S-Track

*compatible with all DEKO-LIGHT 3-circuit spotlights, except 3-circuit adapters with integrated Multi-CC driver [p. 329]

All information is provided without guarantee. Technical data and dimensions are subject to change without prior notice.
To ensure proper functionality, compatibility should be verified using a sample during the project planning phase.

On request, all D LINE busbars can be supplied ready-made and cut to size according to your specifications for a small surcharge. This allows you to start installation directly on site at the customer's premises. Please contact

D LINE SURFACE-MOUNTED POWER TRACK

The D LINE busbar system is available exclusively from DEKO-LIGHT and is now extremely easy to plan and install thanks to a complete redesign of several components. It is also compatible with all common busbar adapters and lights. The elegant and timeless design is available in white, black and grey, and with a huge range of accessories and assembly components available, the possibilities are almost endless when it comes to application and installation. The reversal mechanism of the 90° and T-connectors makes planning easier than ever before, and in the future installing even complex shapes will be a breeze.

Note: Recessed track systems can be found in the D LINE DALI 3-phase power rail luminaires chapter.

D LINE SURFACE-MOUNTED POWER TRACK

- **Up to three phases (3x 16 A) can be fed in**
- **Numerous attachment options**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Length	Price
710000	White	1000 mm	**€ 35.95**
710002	Black	1000 mm	**€ 35.95**
710003	White	2000 mm	**€ 71.95**
710005	Black	2000 mm	**€ 71.95**
710006	White	3000 mm	**€ 103.95**
710008	Black	3000 mm	**€ 103.95**

IP20

Accessories for **710000**, **710003**, **710006**
710077 D Line/Dali cover panel for integrated busbar, white **€ 4.95**

Accessories for **710002**, **710005**, **710008**
710079 D Line/Dali cover panel for integrated busbar, black **€ 4.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

D LINE/DALI SURFACE-MOUNTED POWER TRACK CURVED

- **Curved track 90° (radius 1m)**
- **Enables completely new design forms (corner, semicircle, circle, wave)**
- **Segment length 1.57m**
- **Can be used as D-Line DALI or D-Line standard track**
- **only suitable for standard track adapters (max. length 12cm)**
- **up to 3 phases [3x 16A] can be fed in**
- **cutting tool required for Dali customised assembly**
- **Many different mounting options**

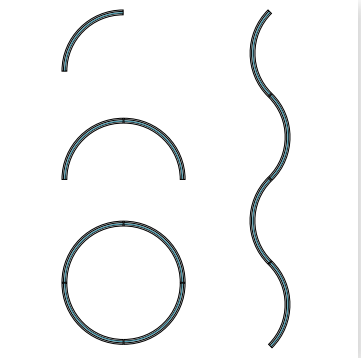

examples of designs

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	1570 mm	Output Current	16 A
Width	35.2 mm		

Article	Housing Color		Price
710113	White	left	**€ 211.95**
710115	Black	left	**€ 211.95**
710114	White	right	**€ 211.95**
710116	Black	right	**€ 211.95**

IP20

D LINE SURFACE-MOUNTED ADAPTER

- **Surface-mounted housing for converting busbar spotlights**
- **Single phase (1x 16 A) feed**
- **Easy to install**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Height	35 mm	Output Current	16 A
Ø	110 mm		

Article	Housing Color	Price
710045	White	**€ 23.95**
710047	Black	**€ 23.95**

IP20



D LINE ELECTRIC FEEDER LEFT

- **Up to three phases (3x 16 A) can be fed in**
- **Power can be fed in from above (ceiling) or from the side**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	98.5 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710009	White	**€ 12.95**
710011	Black	**€ 12.95**

IP20



D LINE ELECTRIC FEEDER RIGHT

- **Up to three phases (3x 16 A) can be fed in**
- **Power can be fed in from above (ceiling) or from the side**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	98.5 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710012	White	**€ 12.95**
710014	Black	**€ 12.95**

IP20

Accessories
710089 D Line cover panel feed left/right **€ 3.45**



D LINE ELECTRICAL LONGITUDINAL CONNECTOR WITH FEED OPTION

- **Up to three phases (3x 16 A) can be fed in**
- **Power supply from above (from ceiling)**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	166 mm	Rated Input Voltage	220-440 V/AC
Width	35 mm	Output Current	16 A

Article	Housing Color	Price
710042	White	**€ 26.95**
710044	Black	**€ 26.95**

IP20

Accessories
710090 D Line/Dali cover panel for longitudinal connector, white **€ 3.45**



D LINE FLEXIBLE CONNECTOR, LEFT-RIGHT

- **Compensates for height or angle differences**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	248 mm	Rated Input Voltage	220-440 V/AC
Width	35 mm	Output Current	16 A

Article	Housing Color	Price
710039	White	**€ 34.95**
710041	Black	**€ 34.95**

IP20

D LINE ELECTRIC CONNECTOR

- **suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	26.5 mm
Length	68 mm	Rated Input Voltage	220-440 V/AC
Width	20.5 mm	Output Current	16 A

Article	Housing Color	Price
710015	White	**€ 7.95**
710017	Black	**€ 7.95**

IP20

D LINE MECHANICAL CONNECTOR

- **Mechanical connector without electrical contacts**
- **For electrical separation of two different power circuits within one track system**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	20 mm
Length	66.4 mm	Height	27 mm

Article	Housing Color	Price
710018	White	**€ 5.95**
710020	Black	**€ 5.95**

IP20

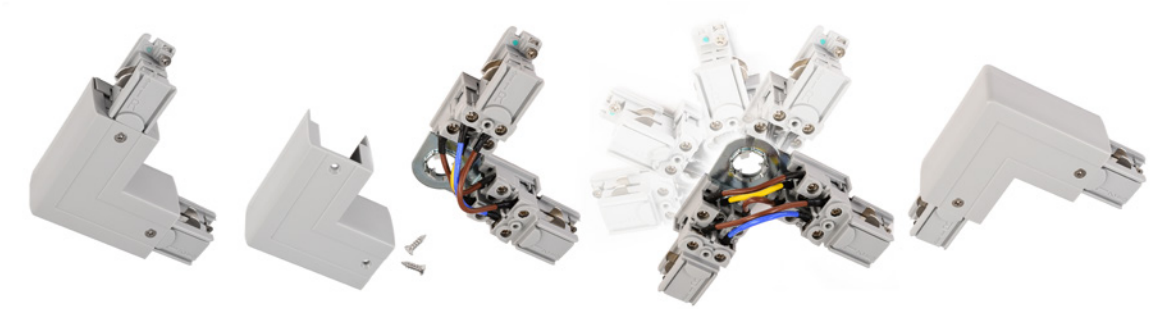



D LINE 90° CONNECTOR LEFT-RIGHT WITH REVERSAL MECHANISM

- **With reversal mechanism for switching the orientation between left and right**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	100.7 mm	Rated Input Voltage	220-440 V/AC
Width	100.7 mm	Output Current	16 A

Article	Housing Color	Price
710036	White	**€ 28.95**
710038	Black	**€ 28.95**

IP20

Accessories

710091 D Line/Dali cover panel for 90° connector, white **€ 3.45**



D LINE T-CONNECTOR LEFT-LEFT-RIGHT WITH REVERSAL MECHANISM

- **with reversal mechanism for switching the orientation between left / right**
- **suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	166 mm	Rated Input Voltage	220-440 V/AC
Width	101 mm	Output Current	16 A

Article	Housing Color	Price
710027	White	**€ 40.95**
710029	Black	**€ 40.95**

IP20



D LINE T-CONNECTOR RIGHT/RIGHT/LEFT WITH EXCHANGE MECHANICS

- **with reversal mechanism for switching the orientation between left / right**
- **suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	166 mm	Rated Input Voltage	220-440 V/AC
Width	101 mm	Output Current	16 A

Article	Housing Color	Price
710030	White	**€ 40.95**
710032	Black	**€ 40.95**

IP20

Accessories

710093 D Line/Dali cover panel for T-connector, white **€ 3.45**

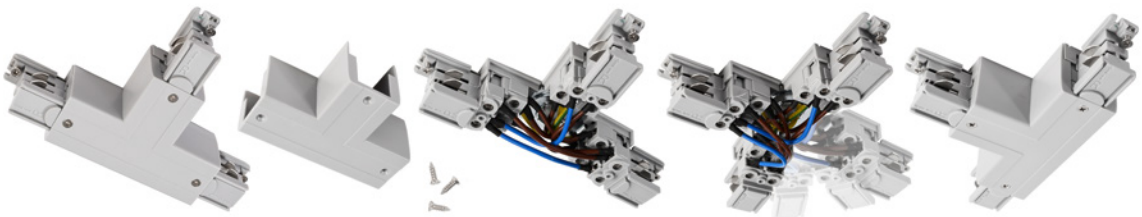



D LINE X-CONNECTOR LEFT-LEFT-RIGHT-RIGHT

- **Easy to install**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	166 mm	Rated Input Voltage	220-440 V/AC
Width	166 mm	Output Current	16 A

Article	Housing Color	Price
710033	White	**€ 52.95**
710035	Black	**€ 52.95**

IP20

Accessories

710092 D Line/Dali cover panel for X-connector, white **€ 3.95**

D LINE COVER PANEL

- **Suitable for surface-mounted and recessed systems**
- **For sealing publicly accessible busbars within a contact zone of less than 2.30 m**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	21.5 mm
Length	1000 mm	Height	7.5 mm

Article	Housing Color	Price
710077	White	**€ 4.95**
710079	Black	**€ 4.95**

D LINE END CAP

- **For closing open current track ends (touch protection)**
- **Easy to install**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	32.5 mm

Article	Housing Color	Length	Width	Price
710066	White	31.3 mm	35.2 mm	**€ 2.45**
710068	Black	31.3 mm	35.2 mm	**€ 2.45**
710103	White	56 mm	47.9 mm	**€ 2.45**
710538	Black	56 mm	47.9 mm	**€ 2.45**

D LINE MOUNTING BRACKET FLEX

- **Suitable for surface-mounted systems**
- **Simplifies installation of complex shapes**
- **Current track can still be slid during installation**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	33.8 mm
Length	40 mm	Height	12.5 mm

Article	Housing Color	Price
710063	White	**€ 4.95**
710065	Black	**€ 4.95**

NEW

D LINE/DALI GRID-CEILING QUICK-MOUNTING BRACKET FOR MINI CABLE SUSPENSION

- **Suitable for surface-mounted systems**
- **For universal use for mounting other components using M6 thread stud bolts on grid ceilings**
- **Suitable for 22-24 mm grid-ceiling support rails**
- **Suitable for steel cables up to 2.6 mm**
- **Mechanical load up to 7 kg/70 N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Steel	Width	39 mm
Length	25 mm	Height	27 mm

Article	Housing Color	Price
710108	White	**€ 3.45**
710109	Black	**€ 3.45**

D LINE WALL BRACKET

- **Suitable for surface-mounted systems**
- **Simplifies installation of current tracks near walls**
- **Ideal for illuminating pictures and objects, for example in exhibitions, collections and museums**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	25 mm
Length	91.9 mm	Height	80 mm

Article	Housing Color	Price
710104	White	**€ 11.95**
710106	Black	**€ 11.95**

IP20

D LINE SUSPENSION CONNECTION BRACKET

- **Suitable for surface-mounted systems**
- **For chain installation or similar (chain not included in the scope of delivery)**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	32 mm
Length	181 mm	Height	20 mm

Article	Housing Color	Price
710057	White	**€ 7.95**
710059	Black	**€ 7.95**

D LINE CEILING SUSPENSION RIGID

- **Sturdy, elegant ceiling hanger**
- **Suitable for surface-mounted systems**
- **Hanger dimension 635 mm (can be shortened to 335 mm)**
- **Hanger can be extended with accessories**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	60 mm
Length	635 mm		

Article	Housing Color	Price
710078	White	**€ 24.95**
710084	Black	**€ 24.95**

D LINE EXTENSION FOR CEILING SUSPENSION RIGID

- **Suitable for rigid ceiling hangers**
- **Extends the hanger length by 300 mm**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	10 mm
Length	310 mm		

Article	Housing Color	Price
710086	White	**€ 4.95**
710087	Black	**€ 4.95**

D LINE ROPE SUSPENSION BRACKET

- **Can be cut to length for suspension dimension: 120-1,500 mm**
- **suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Length	120 mm	Height	52 mm

Article	Housing Color	Price
710048	White	**€ 11.95**
710050	Black	**€ 11.95**

Accessories
710081 D Line/Dali cable for cable suspension 4.0 m **€ 6.95**

D LINE ROPE SUSPENSION BRACKET MINI

- **Stylish and sophisticated suspended mounting**
- **Can be cut to length for hanger lengths: 90-4,960 mm**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Length	120 mm	Height	58 mm

Article	Housing Color	Price
710094	White	**€ 15.95**
710096	Black	**€ 15.95**

Accessories
710108 D Line/Dali grid ceiling quick-mounting clip for wire suspension Mini white **€ 3.45**
710109 D Line/Dali grid ceiling quick-mounting clip for wire suspension Mini black **€ 3.45**

NEW



D LINE/DALI ROPE SUSPENSION BRACKET

- **special wire suspension for D-Line/DALI Curved tracks**
- **enables and extends the mounting options**
- **Suspension dimension can be individually shortened: 90 - 4960 mm**

Housing	Metal	Height	59 mm
Length	62 mm	Loading Weight max.	10 kg
Width	35 mm	Load Force max.	100 N

Article	Housing Color	Price
710117	White	**€ 14.95**
710118	Black	**€ 14.95**

NEW

D LINE/DALI CABLE SUSPENSION BRACKET WITH ADJUSTMENT TRAVERSE

- **Set consisting of wire suspension with ceiling attachment and adjustment traverse**
- **Compensation of asymmetrical weight loads in the track system through one-sided spotlight mounting**
- **Easy and quick adjustment**
- **Suspension dimension can be individually shortened: 160-4960 mm**
- **Suitable for D Line/Dali mounting system**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	32 mm
Length	120 mm	Height	120 mm

Article	Housing Color	Price
710110	White	**€ 20.95**
710112	Black	**€ 20.95**

D LINE FAST-MOUNTING BRACKET

- **Suitable for surface-mounted systems**
- **Current track can be installed without tools using knurled thumb screw and spring clamps**
- **Quick installation and removal for e.g. trade fair construction**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Length	40 mm	Height	11.9 mm

Article	Housing Color	Price
710082	Black	**€ 8.95**

D LINE TRUSS ADAPTER

- **Suitable for surface-mounted systems**
- **Quick-action couplers for fast mounting of current tracks on cross rail structures**
- **Fits all 50 mm aluminium cross rails in event/trade fair construction**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Length	40 mm	Height	11.9 mm

Article	Housing Color	Price
710083	Silver	**€ 25.95**

This little »jack-of-all-trades« makes mounting a track on an existing grid ceiling child's play. The installation time is only a fraction of what it used to be. In the first step, the clip is simply clicked into the visible metal strips of the grid ceiling and is held bomb-proof on the ceiling by means of a safety spring clip. After that, the conductor rail is simply pushed onto it and the installation is finished.

D LINE GRID CEILING FAST-MOUNTING BRACKET

- **Suitable for surface-mounted systems**
- **Quick and easy to install on grid ceilings**
- **Mechanical load up to 15.0 kg/150 N**
- **Suitable for 22-24 mm ceiling grid support rails**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Length	120 mm	Height	11 mm

Article	Housing Color	Price
710051	White	**€ 9.95**
710053	Black	**€ 9.95**

D LINE 3-PHASE ADAPTER FOR LIGHT INSTALLATION

- **Suitable for surface-mounted and recessed systems**
- **Includes reduction bush, M10 flat nut and strain relief grommet**
- **Easy to install**
- **Integrated secondary drop protection**
- **Max. load 10 kg/100 N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	54 mm
Length	84 mm	Rated Input Voltage	220-240 V/AC
Width	32 mm	Output Current	10 A

Article	Housing Color	Price
710097	White	**€ 15.95**
710099	Black	**€ 15.95**

IP20

D LINE THREE-PHASE ADAPTER WITH INTEGRATED MULTI CC POWER SUPPLY

- **Suitable for surface-mounted and recessed systems**
- **Integrated secondary drop protection**
- **Supplied with trumpet nipple and M10 flat nut**
- **Stable integrated adjustable power supply [CC]**
- **Check suitability of the intended lamp**
- **Max. 10 kg/100 N**
- **Exclusively for D LINE, Ivela and Hoffmeister three-phase current tracks**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	41 mm
Length	162 mm	Rated Input Voltage	220-240 V/AC
Width	31 mm		

Article		Output Current Selectable	Power	Output Voltage	Price
862180	□	250 mA / 350 mA / 450 mA / 500 mA	6.2-21.0 W	25-42 V/DC	**€ 25.95**
862183	■	250 mA / 350 mA / 450 mA / 500 mA	6.2-21.0 W	25-42 V/DC	**€ 25.95**
862181	□	600 mA / 700 mA / 750 mA / 800 mA	15.0-33.0 W	25-42 V/DC	**€ 27.95**
862184	■	600 mA / 700 mA / 750 mA / 800 mA	15.0-33.0 W	25-42 V/DC	**€ 27.95**
862182	□	850 mA / 900 mA / 950 mA / 1050 mA	22.0-44.0 W	27-42 V/DC	**€ 29.95**
862185	■	850 mA / 900 mA / 950 mA / 1050 mA	22.0-44.0 W	27-42 V/DC	**€ 29.95**

CC | 110 | SELV | IP20

D LINE SOCKET ADAPTER

- **easy to install**
- **suitable for surface-mounted and recessed systems**
- **as power distribution system in current tracks**
- **max. 1,380 W**
- **integrated plug fuse**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Rated Input Voltage	230 V/AC
Length	58.5 mm	Output Current	6 A
Width	53.5 mm	Connected Load max.	1380 W
Height	103 mm		

Article	Housing Color	Price
710024	☐ White	**€ 22.95**
710026	■ Black	**€ 22.95**

IP20

D LINE MOUNTING ADAPTER FOR ADDITIONAL COMPONENTS

- **Suitable for surface-mounted and recessed systems**
- **Mounting adapter (M6 thread) for holding additional devices and lights**
- **Ideal for use with optional D Line socket adapter**
- **Load max. 10 kg/100 N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal, Plastic	Width	31.5 mm
Length	66.5 mm	Height	84 mm

Article	Housing Color	Price
710054	White	**€ 8.95**
710056	Black	**€ 8.95**

D LINE SIGN HOOK

- **Suitable for surface-mounted and recessed systems**
- **Hook for attaching information signs etc.**
- **Load max. 5kg / 50N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic, Steel	Ø	25 mm
Height	52 mm		

Article	Housing Color	Price
710060	White	**€ 2.45**
710062	Black	**€ 2.45**

D LINE DALI system

page 340

page 341

page 343

page 344

page 345

page 346

page 347

page 347

page 348

page 348

page 349

page 350

page 351

page 353

page 353

page 354

page 354

page 355

page 355

page 356

page 356

page 357

page 357

page 359

page 360

page 361

page 361

D LINE DALI MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V

mounting modules	illust.	white	black	page
mounting power rail L: 1000 mm	01	**710500**	**710501**	340
mounting power rail L: 2000 mm	01	**710502**	**710503**	340
mounting power rail L: 3000 mm	01	**710504**	**710505**	340
mounting power rail curved 90° left	01	**710113**	**710115**	343
mounting power rail curved 90° right	01	**710114**	**710116**	343
mounting adapter for lights	02	**710512**	**710513**	341
live end feeder left	03	**710514**	**710515**	346
live end feeder right side	04	**710516**	**710517**	346
electrical straight connector with center feed option	05	**710520**	**710521**	347
flexible-connector left-right side	06	**710523**	**710524**	347
electrical joint	07	**710525**	**710526**	348
mechanical joint	08	**710018**	**710020**	348
90°-joint left-right with exchange mechanism	09	**710527**	**710528**	349
T-joint left-left-right with exchange mechanism	10	**710530**	**710531**	350
T-joint right-right-left with exchange mechanism	11	**710532**	**710533**	350
X-joint left-left-right-right	12	**710535**	**710536**	351
cover plate	13	**710077**	**710079**	352
endcap	14	**710066**	**710068**	352
ceiling mounting bracket flex	15	**710063**	**710065**	353
suspension clamp for track connection	16	**710057**	**710059**	354
ceiling suspension rigid [635 mm] with canopy	17	**710078**	**710084**	355
extension for ceiling suspension [300 mm]	17	**710086**	**710087**	355
wire suspension bracket with ceiling rosette 1500 mm	18	**710048**	**710050**	356
rope suspension bracket Mini mit Abhängeseil 5000 mm	19	**710094**	**710096**	356
curved suspension cable bracket	20	**710117**	**710118**	357
suspension cable bracket with adjustment crossbar	21	**710110**	**710112**	357
quick mounting bracket for grid ceilings	22	**710051**	**710053**	359
quick mounting bracket for grid ceilings for or mini cable suspension	23	**710108**	**710109**	353
wall bracket	24	**710104**	**710106**	354
truss adapter | silver coloured	25	**710083**	**710083**	358
quick mounting clamp for exhibition stand construction	26	**-**	**710082**	358
3-circuits adapter for light installation	27	**710539**	**710540**	360
electrical outlet adapter	28	**710024**	**710026**	360
mounting adapter for additional components max. 10kg	29	**710054**	**710056**	361
signs hook, max. load 5kg	30	**710060**	**710062**	361

ILLUSTRATIONS WITH PLANNING RELEVANT DIMENSIONS

01


02


03


04


05


06


07

08

09


10


11


12


13

14

15

16


17


18


19


20


21


22


23

24


25


26

27


28


29


30

D LINE DALI BUILT IN POWER RAL SYSTEM 3-PHASE 220-440V

built in modules	illust.	white	cover	black	cover	page
built in power rail L:1000 mm	01	**710506**	-	**710507**	-	344
built in power rail L: 2000 mm	01	**710508**	-	**710509**	-	344
built in power rail L: 3000 mm	01	**710510**	-	**710511**	-	344
eletric feeder left side	02+18	**710514**	**710518**	**710515**	**710519**	346
electric feeder right side	03+18	**710516**	**710518**	**710517**	**710519**	346
electrical straight connector with center feed option	04+19	**710520**	**710090**	**710521**	**710522**	347
electrical joint	05	**710525**	-	**710526**	-	348
mechanical joint	06	**710018**	-	**710020**	-	348
90°-joint left-right	07+20	**710527**	**710091**	**710528**	**710529**	349
T-joint left-left-right	08+21	**710530**	**710093**	**710531**	**710534**	350
T-joint right-right-left	09+21	**710532**	**710093**	**710533**	**710534**	350
X-joint left-left-right-right	10+22	**710535**	**710092**	**710536**	**710537**	351
cover plate	11	**710077**	-	**710079**	-	352
endcap	12	**710103**	-	**710538**	-	352
quick-mounting bracket for installation rail	13	**710107**	-	-	-	345
3-circuits adapter for light installation	14	**710539**	-	**710540**	-	360
electrical outlet adapter	15	**710024**	-	**710026**	-	360
mounting adapter for additional components max. 10kg	16	**710054**	-	**710056**	-	361
signs hook, max. load 5kg	17	**710060**	-	**710062**	-	361

710535

710092

Unlike other Dali systems, you do not need any additional or special electrical components such as feeders, connectors, corners or T-connectors for the recessed tracks, corners or T-connectors. All the standard components of the system are used and only the matching plastic cover is replaced; the recessed version is ready. This simplifies stock-keeping and also provides significantly more flexibility.

ILLUSTRATIONS WITH PLANNING RELEVANT DIMENSIONS

01


02


03


04


05

06

07


08


09


10


11

12

13


14


15


16

17

18


19


20


21


22


FIXING POINTS

power rail	a	b	c	d
1000 mm	125 mm			
2000 mm	125 mm	995 mm		
3000 mm	125 mm		914 mm	1172 mm

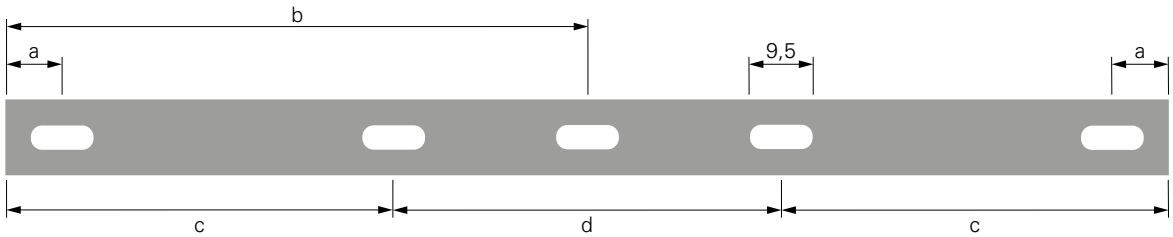

MECHANICAL LOAD TRACK POWER RAIL 1000 MM

60 N ≙ 6,12 kg
dimension in mm

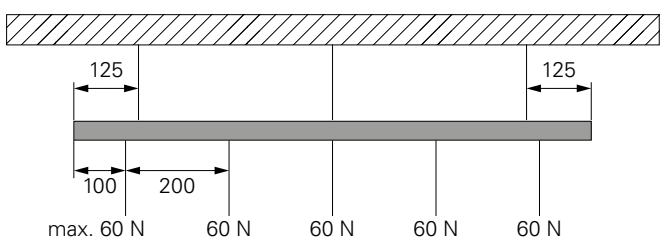

MECHANICAL LOAD TRACK POWER RAIL 2000/3000 MM

30 N ≙ 3,06 kg
dimension in mm

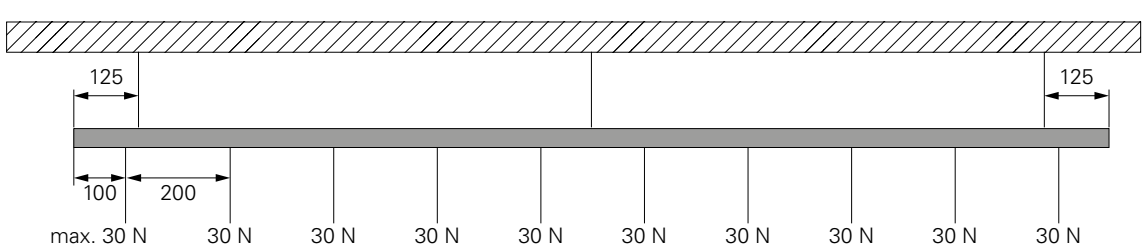

PLANNING GUIDE D LINE DALI MOUNTING POWER RAIL SYSTEM 220-440V



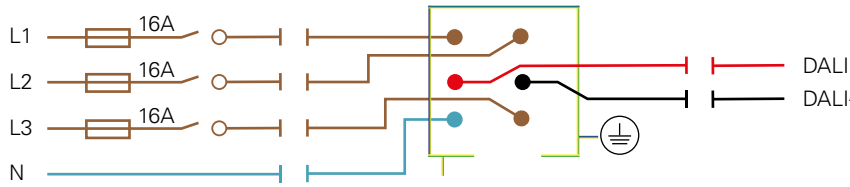

lectrical
straight connector
left-right
with center feed option
710520 + 521

live end connector
left
710514 + 515

cover panel
710077 + 079

power track
710500 + 501
710502 + 503
710504 + 505

mechanical joiner
710018 - 020

end cap
710066 + 068

T-connector
left-left-right
with exchange
mechanism
710530 + 531

X-connector
left-left-right-right
710535 + 536

T-connector
right-right-left
with exchange
mechanism
710532 + 533

surface-mounted adapter
710512 + 513

90°-connector
left-right
with exchange
mechanism
710527 + 528

electrical joiner
710525 + 526

flexible connector
left-right
710523 + 524

live end connector right
710516 + 517

DALI

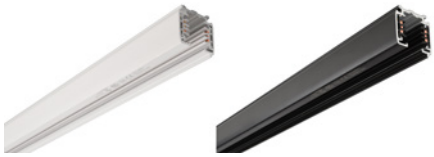

D LINE DALI SURFACE-MOUNTED TRACK RAIL

- **Can be controlled with DALI**
- **Up to three phases [3x 16 A] can be fed in**
- **Cutting tool required for in-house assembly**
- **Numerous attachment options**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Aluminium	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A
Height	35.5 mm		

Article	Housing Color	Length	Price
710500	White	1000 mm	**€ 38.95**
710501	Black	1000 mm	**€ 38.95**
710502	White	2000 mm	**€ 73.95**
710503	Black	2000 mm	**€ 73.95**
710504	White	3000 mm	**€ 107.95**
710505	Black	3000 mm	**€ 107.95**

IP20

Accessories
931066 D LINE DALI, cut-back tool for shortening the DALI wires **€ 154.95**

Accessories for **710500**, **710502**, **710504**
710077 D Line/Dali cover panel for integrated busbar, white **€ 4.95**

Accessories for **710501**, **710503**, **710505**
710079 D Line/Dali cover panel for integrated busbar, black **€ 4.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

D LINE DALI SURFACE-MOUNTED ADAPTER

- **Can be controlled with DALI**
- **Surface-mounted housing for converting busbar spotlights**
- **Single phase (1x 16 A) feed**
- **Easy to install**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Height	35 mm	Output Current	16 A
Ø	143 mm		

Article	Housing Color	Price
710512	White	**€ 26.95**
710513	Black	**€ 26.95**

IP20

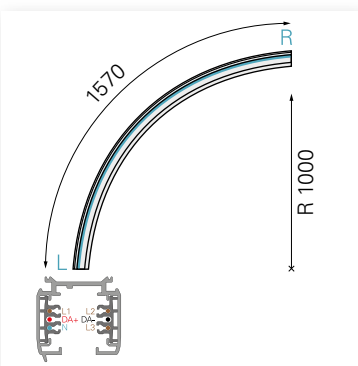

710113, 710115

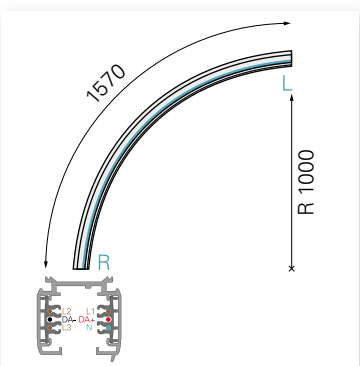

710114, 710116

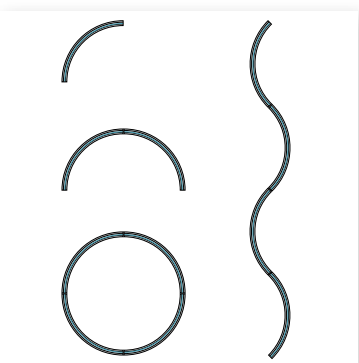

examples of designs

D LINE/DALI SURFACE-MOUNTED POWER TRACK CURVED

- **Curved track 90° (radius 1m)**
- **Enables completely new design forms (corner, semicircle, circle, wave)**
- **Segment length 1.57m**
- **Can be used as D-Line DALI or D-Line standard track**
- **only suitable for standard track adapters (max. length 12cm)**
- **up to 3 phases [3x 16A] can be fed in**
- **cutting tool required for Dali customised assembly**
- **Many different mounting options**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	1570 mm	Output Current	16 A
Width	35.2 mm		

Article	Housing Color		Price
710113	White	left	**€ 211.95**
710115	Black	left	**€ 211.95**
710114	White	right	**€ 211.95**
710116	Black	right	**€ 211.95**

IP20

DALI

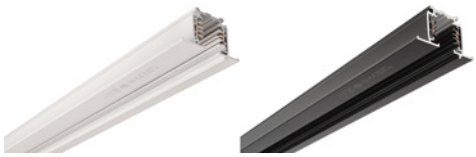

D LINE DALI RECESSED TRACK RAIL

- **Can be controlled with DALI**
- **Up to three phases [3x 16 A] can be fed in**
- **Cutting tool required for in-house assembly**
- **Numerous attachment options**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Aluminium	Rated Input Voltage	220-440 V/AC
Width	56 mm	Output Current	16 A
Height	35.5 mm		

Article	Housing Color	Length	Price
710506	White	1000 mm	**€ 45.95**
710507	Black	1000 mm	**€ 45.95**
710508	White	2000 mm	**€ 83.95**
710509	Black	2000 mm	**€ 83.95**
710510	White	3000 mm	**€ 119.95**
710511	Black	3000 mm	**€ 119.95**

IP20

Accessories
931066 D LINE DALI, cut-back tool for shortening the DALI wires **€ 154.95**

Accessories for **710506**, **710508**, **710510**
710077 D Line/Dali cover panel for integrated busbar, white **€ 4.95**

Accessories for **710507**, **710509**, **710511**
710079 D Line/Dali cover panel for integrated busbar, black **€ 4.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

D LINE QUICK-MOUNTING BRACKET FOR INSTALLATION RAIL

- **Suitable for recessed systems**
- **Simplifies installation of recessed current tracks**
- **No additional substructure is required for mounting (check admissible load of ceiling construction)**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Steel	Width	45 mm
Length	70 mm	Height	25 mm

Article	Housing Color	Price
710107	Silver	**€ 3.95**

IP20

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.



D LINE DALI ELECTRIC FEEDER LEFT

- **Can be controlled using DALI**
- **Up to three phases (3x 16 A) can be fed in**
- **Power can be fed in from above (ceiling) or from the side**
- **Suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	139 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710514	White	**€ 14.95**
710515	Black	**€ 14.95**

IP20



D LINE DALI ELECTRIC FEEDER RIGHT

- **Can be controlled using DALI**
- **Up to three phases (3x 16 A) can be fed in**
- **Power can be fed in from above (ceiling) or from the side**
- **Suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	139 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710516	White	**€ 14.95**
710517	Black	**€ 14.95**

IP20

Accessories for **710516**
710518 D Line DALI cover panel feed left/right, white **€ 3.45**

Accessories for **710517**
710519 D Line DALI cover panel feed left/right, black **€ 3.45**

DALI

D LINE DALI STRAIGHT CONNECTOR WITH FEED OPTION



- **Can be controlled using DALI**
- **Up to three phases (3x 16 A) can be fed in**
- **Power supply from above (ceiling)**
- **Suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	203 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710520	White	**€ 28.95**
710521	Black	**€ 28.95**

IP20

Accessories for **710520**
710090 D Line/Dali cover panel for longitudinal connector, white **€ 3.45**

Accessories for **710521**
710522 D Line DALI cover panel for longitudinal connector, black **€ 3.45**

DALI



D LINE DALI FLEX CONNECTOR

- **Can be controlled using DALI**
- **Easy to install**
- **Compensates for height or angle differences within a track system**
- **Suitable for surface-mounted systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	285 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710523	White	**€ 37.95**
710524	Black	**€ 37.95**

IP20

DALI

D LINE DALI ELECTRIC CONNECTOR

- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	26.5 mm
Length	107 mm	Rated Input Voltage	220-440 V/AC
Width	20.5 mm	Output Current	16 A

Article	Housing Color	Price
710525	White	**€ 9.95**
710526	Black	**€ 9.95**

IP20

D LINE MECHANICAL CONNECTOR

- **Mechanical connector without electrical contacts**
- **For electrical separation of two different power circuits within one track system**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	20 mm
Length	66.4 mm	Height	27 mm

Article	Housing Color	Price
710018	White	**€ 5.95**
710020	Black	**€ 5.95**

IP20

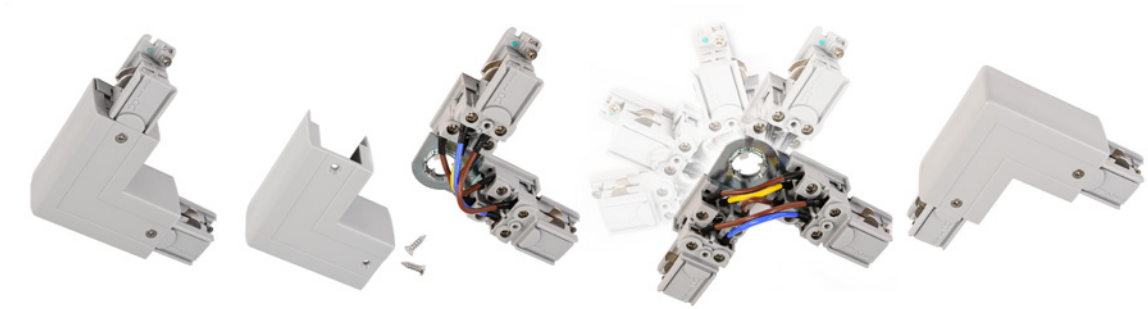



D LINE DALI 90°-CONNECTOR

- **with reversal mechanism for switching the orientation between left and right**
- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	119 mm	Rated Input Voltage	220-440 V/AC
Width	119 mm	Output Current	16 A

Article	Housing Color	Price
710527	White	**€ 31.95**
710528	Black	**€ 31.95**

IP20

Accessories for **710527**
710091 D Line/Dali cover panel for 90° connector, white **€ 3.45**

Accessories for **710528**
710529 D Line DALI cover panel for 90° connector, black **€ 3.45**



D LINE DALI T-CONNECTOR LEFT-LEFT-RIGHT

- **with reversal mechanism for switching the orientation between left and right**
- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	203 mm	Rated Input Voltage	220-440 V/AC
Width	119 mm	Output Current	16 A

Article	Housing Color	Price
710530	White	**€ 44.95**
710531	Black	**€ 44.95**

IP20



D LINE DALI T-CONNECTOR RIGHT-RIGHT-LEFT

- **with reversal mechanism for switching the orientation between left and right**
- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	203 mm	Rated Input Voltage	220-440 V/AC
Width	119 mm	Output Current	16 A

Article	Housing Color	Price
710532	White	**€ 44.95**
710533	Black	**€ 44.95**

IP20

Accessories for **710532**
710093 D Line/Dali cover panel for T-connector, white **€ 3.45**

Accessories for **710533**
710534 D Line DALI cover panel for T-connector, black **€ 3.45**

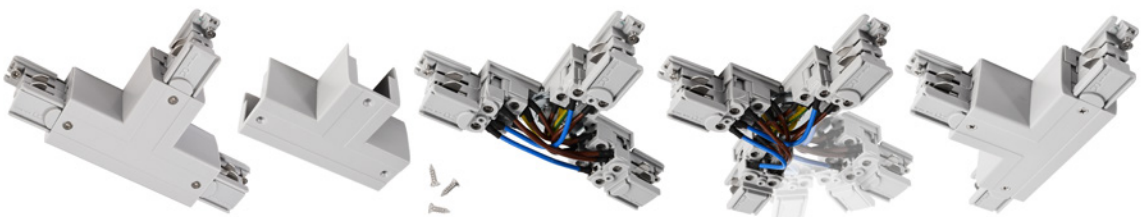

DALI



D LINE DALI X-CONNECTOR

- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	203 mm	Rated Input Voltage	220-440 V/AC
Width	203 mm	Output Current	16 A

Article	Housing Color	Price
710535	White	**€ 56.95**
710536	Black	**€ 56.95**

IP20

Accessories for **710535**
710092 D Line/Dali cover panel for X-connector, white **€ 3.95**

Accessories for **710536**
710537 D Line DALI cover panel for X-connector, black **€ 3.95**

D LINE COVER PANEL

- **Suitable for surface-mounted and recessed systems**
- **For sealing publicly accessible busbars within a contact zone of less than 2.30 m**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	21.5 mm
Length	1000 mm	Height	7.5 mm

Article	Housing Color	Price
710077	White	**€ 4.95**
710079	Black	**€ 4.95**

D LINE END CAP

- **For closing open current track ends (touch protection)**
- **Easy to install**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	32.5 mm

Article	Housing Color	Length	Width	Price
710066	White	31.3 mm	35.2 mm	**€ 2.45**
710068	Black	31.3 mm	35.2 mm	**€ 2.45**
710103	White	56 mm	47.9 mm	**€ 2.45**
710538	Black	56 mm	47.9 mm	**€ 2.45**

D LINE MOUNTING BRACKET FLEX

- **Suitable for surface-mounted systems**
- **Simplifies installation of complex shapes**
- **Current track can still be slid during installation**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	33.8 mm
Length	40 mm	Height	12.5 mm

Article	Housing Color	Price
710063	White	**€ 4.95**
710065	Black	**€ 4.95**

NEW

D LINE/DALI GRID-CEILING QUICK-MOUNTING BRACKET FOR MINI CABLE SUSPENSION

- **Suitable for surface-mounted systems**
- **For universal use for mounting other components using M6 thread stud bolts on grid ceilings**
- **Suitable for 22-24 mm grid-ceiling support rails**
- **Suitable for steel cables up to 2.6 mm**
- **Mechanical load up to 7 kg/70 N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Steel	Width	39 mm
Length	25 mm	Height	27 mm

Article	Housing Color	Price
710108	White	**€ 3.45**
710109	Black	**€ 3.45**

D LINE WALL BRACKET

- **Suitable for surface-mounted systems**
- **Simplifies installation of current tracks near walls**
- **Ideal for illuminating pictures and objects, for example in exhibitions, collections and museums**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	25 mm
Length	91.9 mm	Height	80 mm

Article	Housing Color	Price
710104	White	**€ 11.95**
710106	Black	**€ 11.95**

IP20

D LINE SUSPENSION CONNECTION BRACKET

- **Suitable for surface-mounted systems**
- **For chain installation or similar (chain not included in the scope of delivery)**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	32 mm
Length	181 mm	Height	20 mm

Article	Housing Color	Price
710057	White	**€ 7.95**
710059	Black	**€ 7.95**

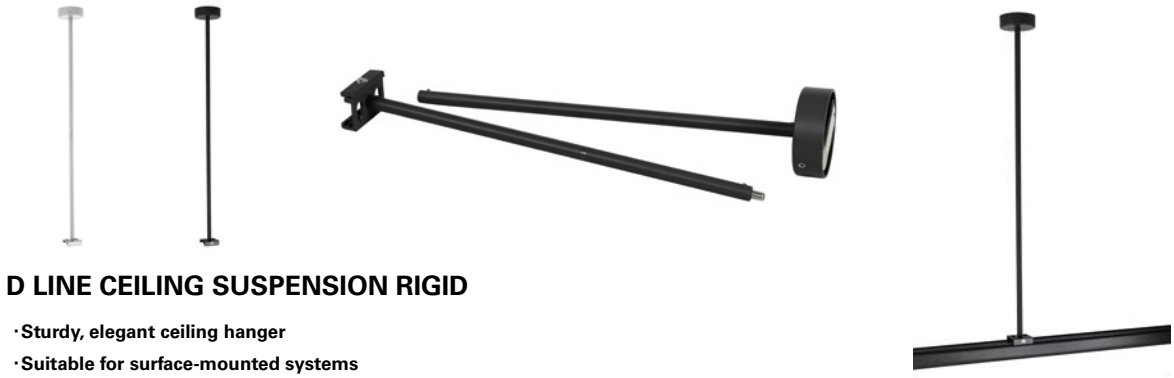

D LINE CEILING SUSPENSION RIGID

- **Sturdy, elegant ceiling hanger**
- **Suitable for surface-mounted systems**
- **Hanger dimension 635 mm (can be shortened to 335 mm)**
- **Hanger can be extended with accessories**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	60 mm
Length	635 mm		

Article	Housing Color	Price
710078	White	**€ 24.95**
710084	Black	**€ 24.95**

D LINE EXTENSION FOR CEILING SUSPENSION RIGID

- **Suitable for rigid ceiling hangers**
- **Extends the hanger length by 300 mm**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	10 mm
Length	310 mm		

Article	Housing Color	Price
710086	White	**€ 4.95**
710087	Black	**€ 4.95**

D LINE ROPE SUSPENSION BRACKET

- **Can be cut to length for suspension dimension: 120-1,500 mm**
- **suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Length	120 mm	Height	52 mm

Article	Housing Color	Price
710048	White	**€ 11.95**
710050	Black	**€ 11.95**

Accessories
710081 D Line/Dali cable for cable suspension 4.0 m **€ 6.95**

D LINE ROPE SUSPENSION BRACKET MINI

- **Stylish and sophisticated suspended mounting**
- **Can be cut to length for hanger lengths: 90-4,960 mm**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Length	120 mm	Height	58 mm

Article	Housing Color	Price
710094	White	**€ 15.95**
710096	Black	**€ 15.95**

Accessories
710108 D Line/Dali grid ceiling quick-mounting clip for wire suspension Mini white **€ 3.45**
710109 D Line/Dali grid ceiling quick-mounting clip for wire suspension Mini black **€ 3.45**

NEW

D LINE/DALI CABLE SUSPENSION BRACKET WITH ADJUSTMENT TRAVERSE

- **Set consisting of wire suspension with ceiling attachment and adjustment traverse**
- **Compensation of asymmetrical weight loads in the track system through one-sided spotlight mounting**
- **Easy and quick adjustment**
- **Suspension dimension can be individually shortened: 160-4960 mm**
- **Suitable for D Line/Dali mounting system**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	32 mm
Length	120 mm	Height	120 mm

Article	Housing Color	Price
710110	White	**€ 20.95**
710112	Black	**€ 20.95**

NEW

D LINE/DALI ROPE SUSPENSION BRACKET

- **special wire suspension for D-Line/DALI Curved tracks**
- **enables and extends the mounting options**
- **Suspension dimension can be individually shortened: 90 - 4960 mm**

Housing	Metal	Height	59 mm
Length	62 mm	Loading Weight max.	10 kg
Width	35 mm	Load Force max.	100 N

Article	Housing Color	Price
710117	White	**€ 14.95**
710118	Black	**€ 14.95**

D LINE FAST-MOUNTING BRACKET

- **Suitable for surface-mounted systems**
- **Current track can be installed without tools using knurled thumb screw and spring clamps**
- **Quick installation and removal for e.g. trade fair construction**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Length	40 mm	Height	11.9 mm

Article	Housing Color	Price
710082	Black	**€ 8.95**

D LINE TRUSS ADAPTER

- **Suitable for surface-mounted systems**
- **Quick-action couplers for fast mounting of current tracks on cross rail structures**
- **Fits all 50 mm aluminium cross rails in event/trade fair construction**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Length	40 mm	Height	11.9 mm

Article	Housing Color	Price
710083	Silver	**€ 25.95**

This little »jack-of-all-trades« makes mounting a track on an existing grid ceiling child's play. The installation time is only a fraction of what it used to be. In the first step, the clip is simply clicked into the visible metal strips of the grid ceiling and is held bomb-proof on the ceiling by means of a safety spring clip. After that, the conductor rail is simply pushed onto it and the installation is finished.

D LINE GRID CEILING FAST-MOUNTING BRACKET

- **Suitable for surface-mounted systems**
- **Quick and easy to install on grid ceilings**
- **Mechanical load up to 15.0 kg/150 N**
- **Suitable for 22-24 mm ceiling grid support rails**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Length	120 mm	Height	11 mm

Article	Housing Color	Price
710051	White	**€ 9.95**
710053	Black	**€ 9.95**

D LINE DALI THREE-PHASE ADAPTER FOR INSTALLING LAMPS

- **can be controlled with DALI, up to three phases can be fed in**
- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	51 mm
Length	113 mm	Rated Input Voltage	220-240 V/AC
Width	32 mm	Output Current	10 A

Article	Housing Color	Price
710539	White	**€ 19.95**
710540	Black	**€ 19.95**

IP20

D LINE SOCKET ADAPTER

- **easy to install**
- **suitable for surface-mounted and recessed systems**
- **as power distribution system in current tracks**
- **max. 1,380 W**
- **integrated plug fuse**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Rated Input Voltage	230 V/AC
Length	58.5 mm	Output Current	6 A
Width	53.5 mm	Connected Load max.	1380 W
Height	103 mm		

Article	Housing Color	Price
710024	White	**€ 22.95**
710026	Black	**€ 22.95**

IP20

D LINE MOUNTING ADAPTER FOR ADDITIONAL COMPONENTS

- **Suitable for surface-mounted and recessed systems**
- **Mounting adapter (M6 thread) for holding additional devices and lights**
- **Ideal for use with optional D Line socket adapter**
- **Load max. 10 kg/100 N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal, Plastic	Width	31.5 mm
Length	66.5 mm	Height	84 mm

Article	Housing Color	Price
710054	White	**€ 8.95**
710056	Black	**€ 8.95**

D LINE SIGN HOOK

- **Suitable for surface-mounted and recessed systems**
- **Hook for attaching information signs etc.**
- **Load max. 5kg / 50N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic, Steel	Ø	25 mm
Height	52 mm		

Article	Housing Color	Price
710060	White	**€ 2.45**
710062	Black	**€ 2.45**

3-phases power luminaires

page 364

page 365

page 366

page 367

page 368

page 369

page 369

page 372

page 373

page 375

page 376

page 377

page 378

page 379

page 381

page 383

page 384

page 386

page 389

page 390

page 391

page 392

page 398

page 399

page 400

page 401

page 404

page 406

page 407

page 408

page 409

NEW | CCT | Phase | Ra>90 | SDCM<3

FOCARIS DIM

- **Infinitely adjustable beam angle**
- **no reflector change necessary**
- **Homogeneous light image**
- **opt. honeycomb filter available**

Housing	Aluminium, Polycarbonate	Rotation Angle	355 Degree
Colour Temperature	2700/3000/4000 K	Swivelling Angle	90 Degree
Length	158 mm	Control	Trailing-edge dimmer
Rated Input Voltage	198-264 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	Light Direction	Front
Light Beam Angle	15 Degree	IK Protection Class	IK04



707268

Article	Housing Color			Luminous Flux	W x H	Power	Light Beam Angle 2	Price
707268	White	WW	NW	1210/1350/1350 lm	80 x 142 mm	15.0 W	50 Degree	**€ 111.95**
707269	Black	WW	NW	1100/1250/1250 lm	80 x 142 mm	15.0 W	50 Degree	**€ 111.95**
707270	White	WW	NW	3015/3450/3450 lm	118 x 181 mm	37.0 W	60 Degree	**€ 175.95**
707271	Black	WW	NW	3015/3450/3450 lm	118 x 181 mm	37.0 W	60 Degree	**€ 175.95**

IP20

Accessories for **707268**, **707269**
931166 Focaris, Honeycomb filter 80 mm **€ 3.95**

Accessories for **707270**, **707271**
931167 Focaris, Honeycomb filter 118 mm **€ 4.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

NEW | CCT | DALI | Phase | Ra>90 | SDCM<3

FOCARIS DALI

- **Infinitely adjustable beam angle**
- **no reflector change necessary**
- **Homogeneous light image**
- **opt. honeycomb filter available**

Housing	Aluminium, Polycarbonate	Swivelling Angle	90 Degree
Colour Temperature	2700/3000/4000 K	Control	DALI 2 / DT6, Intelli Push-Dim
Rated Input Voltage	198-264 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	Light Direction	Front
Light Beam Angle	15 Degree	IK Protection Class	IK04
Rotation Angle	355 Degree		


707264

Article	Housing Color			Luminous Flux	L x W x H	Light Beam Angle 2	Power	Price
707264	White	WW	NW	1210/1350/1350 lm	198 x 80 x 144 mm	50 Grad	15.0 W	**€ 135.95**
707265	Black	WW	NW	1100/1250/1250 lm	198 x 80 x 144 mm	50 Grad	15.0 W	**€ 135.95**
707266	White	WW	NW	3015/3450/3450 lm	238 x 118 x 180 mm	60 Grad	37.0 W	**€ 191.95**
707267	Black	WW	NW	3015/3450/3450 lm	238 x 118 x 180 mm	60 Grad	37.0 W	**€ 191.95**

IP20 | EL

Accessories for **707264**, **707265**
931166 Focaris, Honeycomb filter 80 mm **€ 3.95**

Accessories for **707266**, **707267**
931167 Focaris, Honeycomb filter 118 mm **€ 4.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

NEW | BEG | Phase | Ra>90 | SDCM<3

CERES ON/OFF

- **particularly energy efficient**
- **high-quality light image**
- **can be customised with a wide range of accessories**

Housing	Aluminium	Rotation Angle	355 Degree
Surface	Matt	Swivelling Angle	90 Degree
Rated Input Voltage	198-264 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK04
Light Beam Angle	36 Degree		



707284

Article	Housing Color	Colour Temperature	Luminous Flux	Height	Ø	Power	Price
707284	White	WW 3000 K	2500 lm	60 mm	90 mm	19.0 W	**€ 59.95**
707285	Black	WW 3000 K	2500 lm	60 mm	90 mm	19.0 W	**€ 59.95**
707292	White	WW 3000 K	4400 lm	69 mm	118 mm	31.0 W	**€ 75.95**
707293	Black	WW 3000 K	4400 lm	69 mm	118 mm	31.0 W	**€ 75.95**
707286	White	NW 4000 K	2600 lm	60 mm	90 mm	19.0 W	**€ 59.95**
707287	Black	NW 4000 K	2600 lm	60 mm	90 mm	19.0 W	**€ 59.95**
707294	White	NW 4000 K	4600 lm	69 mm	118 mm	31.0 W	**€ 75.95**
707295	Black	NW 4000 K	4600 lm	69 mm	118 mm	31.0 W	**€ 75.95**

IP20

Accessories for **707284**, **707285**, **707286**, **707287**

931174	Lens 24 degrees for Ceres 90	**€ 7.95**
931175	Lens 60 degrees for Ceres 90	**€ 7.95**
931176	Honeycomb filter for Ceres 90, black	**€ 3.95**
931177	Cross for Ceres 90, black	**€ 7.95**
931178	Wall Washer for Ceres 90, black	**€ 9.95**
931179	Barndoor for Ceres 90, black	**€ 25.95**

Accessories for **707292**, **707293**, **707294**, **707295**

931186	Lens 24 degrees for Ceres 118	**€ 7.95**
931187	Lens 60 degrees for Ceres 118	**€ 7.95**
931188	Honeycomb filter for Ceres 118, black	**€ 3.95**
931189	Cross for Ceres 118, black	**€ 7.95**
931190	Wall Washer for Ceres 118, black	**€ 9.95**
931191	Barndoor for Ceres 118, black	**€ 29.95**

NEW · BEG · DALI · Phase · Ra>90 · SDCM<3

CERES DALI

- **particularly energy efficient**
- **high-quality light image**
- **can be customised with a wide range of accessories**

Housing	Aluminium	Swivelling Angle	90 Degree
Surface	Matt	Control	DALI 2 / DT6, Intelli Push-Dim
Rated Input Voltage	198-264 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90
Light Beam Angle	36 Degree	IK Protection Class	IK04
Rotation Angle	355 Degree		



707296

Article	Housing Color	Colour Temperature	Luminous Flux	Height	Ø	Power	Price
707296	White	WW 3000 K	2500 lm	60 mm	90 mm	19.0 W	**€ 91.95**
707297	Black	WW 3000 K	2500 lm	60 mm	90 mm	19.0 W	**€ 91.95**
707304	White	WW 3000 K	4400 lm	69 mm	118 mm	31.0 W	**€ 107.95**
707305	Black	WW 3000 K	4400 lm	69 mm	118 mm	31.0 W	**€ 107.95**
707298	White	NW 4000 K	2600 lm	60 mm	90 mm	19.0 W	**€ 91.95**
707299	Black	NW 4000 K	2600 lm	60 mm	90 mm	19.0 W	**€ 91.95**
707306	White	NW 4000 K	4600 lm	69 mm	118 mm	31.0 W	**€ 107.95**
707307	Black	NW 4000 K	4600 lm	69 mm	118 mm	31.0 W	**€ 107.95**

IP20 · EL

Accessories for **707296**, **707297**, **707298**, **707299**

931174	Lens 24 degrees for Ceres 90	**€ 7.95**
931175	Lens 60 degrees for Ceres 90	**€ 7.95**
931176	Honeycomb filter for Ceres 90, black	**€ 3.95**
931177	Cross for Ceres 90, black	**€ 7.95**
931178	Wall Washer for Ceres 90, black	**€ 9.95**
931179	Barndoor for Ceres 90, black	**€ 25.95**

Accessories for **707304**, **707305**, **707306**, **707307**

931186	Lens 24 degrees for Ceres 118	**€ 7.95**
931187	Lens 60 degrees for Ceres 118	**€ 7.95**
931188	Honeycomb filter for Ceres 118, black	**€ 3.95**
931189	Cross for Ceres 118, black	**€ 7.95**
931190	Wall Washer for Ceres 118, black	**€ 9.95**
931191	Barndoor for Ceres 118, black	**€ 29.95**

Phase

PANEL TRACK LIGHT

- **Ideal for homogeneous basic lighting**
- **Can be rotated and swivelled**
- **High luminous flux**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	110-240 V/AC
Length	300 mm	Power Supply Unit incl.	Yes
Width	110 mm	Light Beam Angle	110 Degree
Height	8.5 mm	Swivelling Angle	90 Degree
Power	20 W	CRI (Ra)	80



707134

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707134	White	WW 3000 K	2000 lm	**€ 91.95**
707135	Black	WW 3000 K	2000 lm	**€ 91.95**
707136	White	NW 4000 K	2200 lm	**€ 87.95**
707137	Black	NW 4000 K	2200 lm	**€ 87.95**

IP20 A↑G F

L1 L2 L3 Phase

LINEAR 60

- **low height**
- **homogeneous illumination**

Application Area
Shop / Retail / Sales area, Home / Living, Trade fair construction / shop fitting, Hotel / catering

Housing	Aluminium	Power	18 W
Surface	Matt	Rated Input Voltage	200-240 V/AC
Length	687 mm	Power Supply Unit incl.	Yes
Width	32 mm	Light Beam Angle	110 Degree
Height	62 mm	CRI (Ra)	80



707147

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707148	Black	WW 3000 K	1950 lm	**€ 114.95**
707147	White	WW 3000 K	2100 lm	**€ 114.95**
707150	Black	NW 4000 K	2100 lm	**€ 114.95**
707149	White	NW 4000 K	2300 lm	**€ 114.95**

IP20 A↑G E

L1 L2 L3 Phase

LINEAR 100

- **low height**
- **homogeneous illumination**

Application Area
Shop / Retail / Sales area, Home / Living, Trade fair construction / shop fitting, Hotel / catering

Housing	Aluminium	Power	28 W
Surface	Matt	Rated Input Voltage	200-240 V/AC
Length	1087 mm	Power Supply Unit incl.	Yes
Width	32 mm	Light Beam Angle	110 Degree
Height	62 mm	CRI (Ra)	80



707151

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707152	Black	WW 3000 K	3100 lm	**€ 147.95**
707151	White	WW 3000 K	3200 lm	**€ 147.95**
707154	Black	NW 4000 K	3200 lm	**€ 147.95**
707153	White	NW 4000 K	3400 lm	**€ 147.95**

IP20 A↑G E

LINEAR PRO SOFT

LINEAR PRO 3-circuit track luminaires are the ideal solution for illuminating retail shelving, aisles in supermarkets and many other applications.

The LINEAR PRO is available as a 3-circuit track luminaire in four versions: FOLD, TILT, SOFT and OFFICE. Each version offers specific advantages for lighting design and enables precise illumination of products and other objects. While the SOFT version features an extra-wide fixed beam angle of 120°, the LINEAR PRO TILT and LINEAR PRO FOLD can be flexibly adjusted to suit the respective sales areas.

LINEAR PRO SOFT

LINEAR PRO TILT

LINEAR PRO FOLD

TILT or FOLD?

The LINEAR PRO TILT can either illuminate straight downwards or be individually tilted sideways by up to 30°. In contrast, the LINEAR PRO FOLD features a three-part design with two LED wings complemented by a diffuse light line in the centre.

This makes the LINEAR PRO FOLD particularly suitable for the uniform illumination of complete aisles with shelving on both sides, while the LINEAR PRO TILT can be flexibly directed towards individual shelving units.

For optimum retail lighting, the SOFT, TILT and FOLD series can ideally be combined with additional spotlight modules. These are particularly suitable for highlighting promotional displays and shelf end caps.

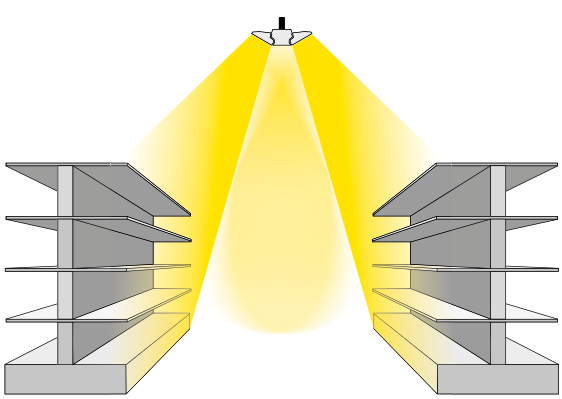

3 ADVANTAGES

ADJUSTABLE POWER

The power of the LINEAR PRO 3-circuit track lights can be adjusted in four stages. The luminaires are also DC-capable and can be integrated into emergency power systems.

BEG SUBSIDY

The LINEAR PRO luminaires fulfil the requirements of the BEG subsidy for efficient LED luminaires and are subsidised by the Federal Ministry for Economic Affairs and Climate Protection with 15%.

SEAMLESSLY COMBINABLE

The 1500 mm versions of the LINEAR PRO have a sliding track adapter and are each available in a 50% mirrored A/B version to allow for seamless side-by-side installation, even across track connectors.

BEG DALI Phase power switch Ra>90 SDCM<5

LINEAR PRO SOFT DALI

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 15 %]**
- **Long service life of 60,000 hours [L80B50]**
- **Particularly energy efficient**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Aluminium	Rated Input Voltage	198-264 V/AC
Length	602 mm	Power Supply Unit incl.	Yes
Width	61.1 mm	Light Beam Angle	120 Degree
Height	58 mm	Control	DALI 2 / DT6
Power Selectable	14 W, 16 W, 18 W, 20 W	CRI (Ra)	90
		IK Protection Class	IK03



707219

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707220	Black	WW 3000 K	2800 lm	**€ 114.95**
707219	White	WW 3000 K	2850 lm	**€ 114.95**
707222	Black	NW 4000 K	2850 lm	**€ 114.95**
707221	White	NW 4000 K	2900 lm	**€ 114.95**

CC IP20 EL

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

BEG CCT DALI Phase power switch Ra>90 SDCM<5

LINEAR PRO SOFT DALI CCT

- **Eligible for German BEG federal funding**
- **Can run on emergency power**
- **Long service life of 60,000 hours (L80B50)**
- **Particularly energy efficient**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Aluminium	Rated Input Voltage	198-264 V/AC
Colour Temperature	3000/3500/4000 K	Power Supply Unit incl.	Yes
Length	1196 mm	Light Beam Angle	120 Degree
Width	61.1 mm	Control	DALI 2 / DT6
Height	58 mm	CRI (Ra)	90
Power Selectable	28 W, 32 W, 36 W, 40 W	IK Protection Class	IK03



707223

Article	Housing Color		Luminous Flux	Price
707224	Black	WW NW	4800/5000/4900 lm	**€ 147.95**
707223	White	WW NW	4900/5100/5000 lm	**€ 147.95**

CC IP20 EL

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

NEW · BEG · DALI · Phase · power switch · Ra>90 · SDCM<3 · UGR<19

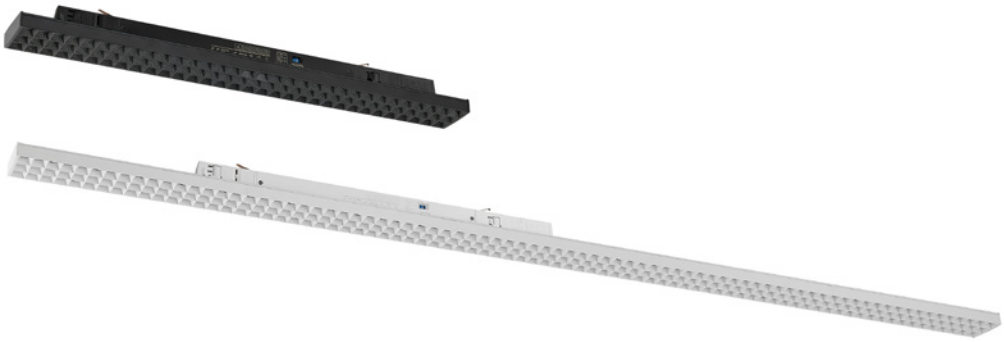

LINEAR PRO OFFICE DALI

- **Suitable for VDU workstations (in accordance with EN 12464-1 BAP65 [L65 = 3000cd/m²])**
- **BEG eligible**
- **Seamless baying**
- **Emergency current capable [198-264 V/DC EOFI: 100%]**
- **Output adjustable in 4 levels**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre, Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Safety lighting / emergency lighting

Housing	Steel	Light Beam Angle	60 Degree
Width	62 mm	Control	DALI 2 / DT6, Intelli Push-Dim
Height	58 mm		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK03



707335

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Power Selectable	Price
707329	Black	WW 3000 K	3600 lm	600 mm	24.0 W / 22.0 W / 20.0 W / 18.0 W	**€ 151.95**
707328	White	WW 3000 K	3850 lm	600 mm	24.0 W / 22.0 W / 20.0 W / 18.0 W	**€ 151.95**
707333	Black	WW 3000 K	8750 lm	1493 mm	60.0 W / 55.0 W / 50.0 W / 45.0 W	**€ 183.95**
707332	White	WW 3000 K	9300 lm	1493 mm	60.0 W / 55.0 W / 50.0 W / 45.0 W	**€ 183.95**
707331	Black	NW 4000 K	3600 lm	600 mm	24.0 W / 22.0 W / 20.0 W / 18.0 W	**€ 151.95**
707330	White	NW 4000 K	3850 lm	600 mm	24.0 W / 22.0 W / 20.0 W / 18.0 W	**€ 151.95**
707335	Black	NW 4000 K	8750 lm	1493 mm	60.0 W / 55.0 W / 50.0 W / 45.0 W	**€ 183.95**
707334	White	NW 4000 K	9300 lm	1493 mm	60.0 W / 55.0 W / 50.0 W / 45.0 W	**€ 183.95**

IP20 · EL

BEG | Phase | power switch | Ra>90 | SDCM<3 | UGR<19

LINEAR PRO TILT

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 100 %]**
- **Can be locked shining downwards**
- **Can be swivelled up to 30° to each side**
- **Long service life of 60,000 hours [L80B50]**
- **Particularly energy efficient**
- **Output adjustable in three stages**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Steel	Light Beam Angle	60 Degree
Width	60 mm	Swivelling Angle	60 Degree
Height	54 mm	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		



707141

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Power Selectable	Price
707195	White	WW 3000 K	3200 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 122.95**
707196	Black	WW 3000 K	3200 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 122.95**
707197	White	WW 3000 K	8000 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 151.95**
707198	Black	WW 3000 K	8000 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 151.95**
707141	White	NW 4000 K	3200 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 122.95**
707142	Black	NW 4000 K	3200 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 122.95**
707143	White	NW 4000 K	8000 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 151.95**
707144	Black	NW 4000 K	8000 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 151.95**

IP20 | EL

BEG DALI Phase power switch Ra>90 SDCM<3 UGR<19

LINEAR PRO TILT DALI

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 15 %]**
- **Can be locked shining downwards**
- **Can be swivelled up to 30° to each side**
- **Long service life of 60,000 hours [L80B50]**
- **Particularly energy efficient**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Steel	Rated Input Voltage	198-264 V/AC
Luminous Flux	8000 lm	Power Supply Unit incl.	Yes
Length	1493 mm	Light Beam Angle	60 Degree
Width	60 mm	Swivelling Angle	60 Degree
Height	54 mm	Control	DALI 2 / DT6
Power Selectable	50 W, 45 W, 40 W, 35 W	CRI (Ra)	90
		IK Protection Class	IK03



707145

Article	Housing Color	Colour Temperature	Price
707199	White	WW 3000 K	**€ 175.95**
707200	Black	WW 3000 K	**€ 175.95**
707145	White	NW 4000 K	**€ 175.95**
707146	Black	NW 4000 K	**€ 175.95**

IP20 EL

BEG | Phase | power switch | Ra>90 | SDCM<3 | UGR<22

LINEAR PRO FOLD

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 100 %]**
- **Long service life of 60,000 hours [L80B50]**
- **Can be swivelled up to 30° to each side**
- **Particularly energy efficient**
- **Output adjustable in four steps**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Aluminium	Light Beam Angle	30 Degree
Width	120 mm	Light Beam Angle 2	90 Degree
Height	68 mm	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		



707189

Article	Housing Color		Colour Temperature	Luminous Flux	Length	Power Selectable	Price
707205	White	WW	3000 K	2900 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 139.95**
707206	Black	WW	3000 K	2900 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 139.95**
707207	White	WW	3000 K	7250 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 167.95**
707208	Black	WW	3000 K	7250 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 167.95**
707189	White	NW	4000 K	2900 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 139.95**
707190	Black	NW	4000 K	2900 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 139.95**
707191	White	NW	4000 K	7250 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 167.95**
707192	Black	NW	4000 K	7250 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 167.95**

IP20 | EL

BEG DALI Phase power switch Ra>90 SDCM<3 UGR<22

LINEAR PRO FOLD DALI

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 15 %]**
- **Long service life of 60,000 hours [L80B50]**
- **Particularly energy efficient**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	1493 mm	Light Beam Angle	30 Degree
Width	120 mm	Light Beam Angle 2	90 Degree
Height	68 mm	Control	DALI 2 / DT6
Power Selectable	50 W, 45 W, 40 W, 35 W	CRI (Ra)	90
		IK Protection Class	IK03
Rated Input Voltage	198-264 V/AC		



707193

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707210	Black	WW 3000 K	7000 lm	**€ 191.95**
707209	White	WW 3000 K	7250 lm	**€ 191.95**
707194	Black	NW 4000 K	7000 lm	**€ 191.95**
707193	White	NW 4000 K	7250 lm	**€ 191.95**

IP20 EL

CAN

- **customisable with extensive accessories**
- **customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Ø	60 mm	Control	Dimmable via optional light source
Pendulum Length	1500 mm		
Max. Power	1x max. 7.5 W		

Article	Housing Color	Height	Price
707251	White	150 mm	**€ 55.95**
707252	Black	150 mm	**€ 55.95**
707255	White	350 mm	**€ 67.95**
707256	Black	350 mm	**€ 67.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

Phase

CAN

- **customised lighting solution thanks to replaceable light source**
- **can be combined with the product family of the CAN series**

Application Area
Home / Living, Reception / Communication, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	134 mm	Control	Dimmable via optional light source
Ø	60 mm		
Max. Power	1x max. 7.5 W	Swivelling Angle	90 Degree

Article	Housing Color	Price
707079	White	**€ 39.95**
707080	Silver	**€ 39.95**
707081	Black	**€ 39.95**

GU10 IP20

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
931065	Acrylic attachment for Can	**€ 3.95**

page 30 page 68 page 70 page 72 page 168 page 182 page 184

1/3

CAN BASE MIX'N MATCH 1/3

- **customised lighting solution thanks to replaceable light source**
- **can be customised with cylinder housing in 6 different colours**
- **can be combined with the extensive product family of the CAN series**

Housing	Aluminium	Control	Dimmable via optional light source
Height	91 mm	Rotation Angle	350 Degree
Ø	76 mm	Swivelling Angle	90 Degree
Max. Power	1x max. 7.5 W		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Price
707246	White	**€ 33.95**
707247	Black	**€ 33.95**
707248	Silver	**€ 33.95**

GU10 IP20

2/3

CYLINDER HOOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	98 mm		

Article	Housing Color	Price
931053	White	**€ 6.45**
931054	Black	**€ 6.45**
931055	Bronze	**€ 14.95**
931056	Brass	**€ 14.95**
931057	Black grey	**€ 14.95**
931058	Rosé	**€ 14.95**

IP20

3/3

REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 3.95**
930302	Black	**€ 3.95**
930303	Gold	**€ 3.95**
930366	Silver	**€ 3.95**

IP20

HORUS

If you're looking for a slim, powerful and flexible three-phase spotlight, look no further than the Horus. The slimline housing and matt surface finish combined with the powerful chip for all wattages make the Horus a true jack-of-all-trades.

Phase UGR<19

HORUS

- **low glare value**
- **can be rotated and swivelled**

Application Area
Shop / Retail / Sales area, Office / conference, Office / conference

Housing	Plastic	Light Beam Angle	40 Degree
Surface	Matt	Swivelling Angle	350 Degree
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes		



707094

Article	Housing Color	Colour Temperature	Luminous Flux	Height	Ø	Power	EEI	Price
707094	Black	WW 3000 K	625 lm	125 mm	60 mm	7.0 W	E	**€ 55.95**
707095	White	WW 3000 K	625 lm	125 mm	60 mm	7.0 W	E	**€ 55.95**
707098	Black	WW 3000 K	915 lm	140 mm	70 mm	10.0 W	E	**€ 63.95**
707099	White	WW 3000 K	915 lm	140 mm	70 mm	10.0 W	E	**€ 63.95**
707102	Black	WW 3000 K	1705 lm	185 mm	80 mm	20.0 W	F	**€ 71.95**
707103	White	WW 3000 K	1705 lm	185 mm	80 mm	20.0 W	F	**€ 71.95**
707106	Black	WW 3000 K	2525 lm	210 mm	90 mm	30.0 W	F	**€ 87.95**
707107	White	WW 3000 K	2525 lm	210 mm	90 mm	30.0 W	F	**€ 87.95**
707096	Black	NW 4000 K	635 lm	125 mm	60 mm	7.0 W	E	**€ 55.95**
707097	White	NW 4000 K	635 lm	125 mm	60 mm	7.0 W	E	**€ 55.95**
707100	Black	NW 4000 K	1030 lm	140 mm	70 mm	10.0 W	E	**€ 63.95**
707101	White	NW 4000 K	1030 lm	140 mm	70 mm	10.0 W	E	**€ 63.95**
707104	Black	NW 4000 K	1785 lm	185 mm	80 mm	20.0 W	F	**€ 71.95**
707105	White	NW 4000 K	1785 lm	185 mm	80 mm	20.0 W	F	**€ 71.95**
707108	Black	NW 4000 K	2605 lm	210 mm	90 mm	30.0 W	F	**€ 87.95**
707109	White	NW 4000 K	2605 lm	210 mm	90 mm	30.0 W	F	**€ 87.95**

IP20

Phase Ra>90

UNI 2

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	36 Degree
Height	167 mm	Swivelling Angle	90 Degree
Ø	100 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Power	17 W		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90


707044

Article	Housing Color		Luminous Flux	Price
707131	Black	WW	1080 lm	**€ 148.95**
707044	White	WW	1110 lm	**€ 148.95**

Accessories

930339	Reflector ring black for Uni II series		**€ 8.95**
930340	Reflector ring gold for Uni II series		**€ 8.95**
930341	Reflector ring chrome for Uni II series		**€ 8.95**
930335	Rear black cover for Uni II series		**€ 2.45**
930337	Black heat sink cover for Uni II series		**€ 6.45**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 6.95**

page 54

page 55

page 56

page 59

page 122

page 125

Phase Ra>90

NIHAL

- **can be rotated and swivelled**
- **large tilt angle**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	135 mm	Light Beam Angle	33 Degree
Width	138 mm	Swivelling Angle	180 Degree
Height	188 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	86 mm		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90


707040

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Price
707056	Silver	WW 3000 K	2470 lm	33.0 W	**€ 183.95**
707041	Black	WW 3000 K	2580 lm	33.0 W	**€ 183.95**
707040	White	WW 3000 K	2880 lm	33.0 W	**€ 183.95**
707043	Black	NW 4000 K	2660 lm	33.0 W	**€ 183.95**
707057	Silver	NW 4000 K	2700 lm	33.0 W	**€ 183.95**
707042	White	NW 4000 K	3100 lm	34.0 W	**€ 183.95**

IP20 A↑G G

Accessories

930315	Reflector ring white for Nihal series	**€ 3.95**
930316	Reflector ring black for Nihal series	**€ 3.95**
930365	Reflector ring silver for Nihal series	**€ 3.95**
930317	Reflector ring gold for Nihal series	**€ 3.95**
930311	Side cover white for Nihal series	**€ 4.95**
930312	Side cover black for Nihal series	**€ 4.95**
930363	Side cover silver for Nihal series	**€ 4.45**
930313	Side cover gold for Nihal series	**€ 4.95**
930314	Side cover walnut wood look for Nihal series	**€ 6.45**
930769	Side cover natural oak wood look for Nihal series	**€ 6.45**
930318	15° reflector for Nihal series	**€ 13.95**
930320	50° reflector for Nihal series	**€ 13.95**
930321	Honeycomb filter for Nihal series	**€ 8.95**
930322	Spread lens for Nihal 37° series	**€ 8.95**
930323	Softening lens for Nihal 37° series	**€ 8.95**
930324	Linear spread lens for Nihal 40°/80° series	**€ 8.95**

Phase Ra>90

NIHAL MINI

- **Can be rotated and swivelled**
- **Large tilt angle**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	94 mm	Light Beam Angle	35 Degree
Width	102 mm	Swivelling Angle	180 Degree
Height	139 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	60 mm		
Power	15 W	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC		


707036

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707037	Black	WW 3000 K	1080 lm	**€ 141.95**
707054	Silver	WW 3000 K	1100 lm	**€ 141.95**
707036	White	WW 3000 K	1240 lm	**€ 141.95**
707039	Black	NW 4000 K	1160 lm	**€ 141.95**
707055	Silver	NW 4000 K	1190 lm	**€ 141.95**
707038	White	NW 4000 K	1330 lm	**€ 141.95**



Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930297	Side cover white for Nihal Mini series	**€ 3.25**
930298	Side cover black for Nihal Mini series	**€ 3.25**
930364	Side cover silver for Nihal Mini series	**€ 2.95**
930299	Side cover gold for Nihal Mini series	**€ 3.25**
930300	Side cover walnut wood look for Nihal Mini series	**€ 4.95**
930768	Side cover natural oak wood look for Nihal Mini series	**€ 4.75**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 6.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 3.95**
930767	12° lens for Nihal Mini series	**€ 8.95**

RF-SMART EVENTUS THREE-PHASE SPOT RGB+CCT

The RF-SMART EVENTUS 3-PHASE SPOT RGB+CCT is an intelligent LED spotlight for 3-phase track that combines coloured accent light and precise white light control in a single luminaire. With RGB+CCT technology, ZigBee 3.0, RF-SMART control and up to 16 million colours, it is ideal for modern lighting scenarios in commercial, hospitality and event areas.

RGB+CCT | Phase | Ra>90 | RF-smart | zigbee

RF-SMART EVENTUS THREE-PHASE SPOT RGB+CCT

- **rotatable and swivelling**
- **brightness and colour saturation dimmable**
- **RGB 3x 6W (max. 18W), CW/WW 2x 30W (max. 30W), max. total output 30W**
- **16 million colours and colour temperature adjustable**
- **18 automatic programmes pre-installed**
- **program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **opt. controllable with RF-smart radio remote controls [2.4Ghz, range approx. 30 m]**
- **controllable with all Zigbee 3.0 compatible controllers / apps such as Amazon Echo [Alexa], Google Assistant, Tuya [corresponding gateway required, outdoor range up to 100 m]**

Housing	Plastic, Metal	Rated Input Voltage	100-240 V/AC
Surface	Powder-coated, Fine structure, Matt	Power Supply Unit incl.	Yes
		Light Beam Angle	36 Degree
Colour Temperature	2700-6000 K	Rotation Angle	350 Degree
Luminous Flux	1800 lm	Swivelling Angle	90 Degree
Length	205 mm	Control	RF-Smart, ZigBee 3.0
Width	76 mm	CRI (Ra)	90
Height	246 mm	Light Direction	Front
Power	30 W		

Article	Housing Color		Price
843530	White	RGB WW CW	**€ 159.95**
843531	Black	RGB WW CW	**€ 159.95**

IP20 | 5 CH

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843525	RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 55.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 59.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 87.95**
843527	RF-smart, PIR motion detector, white, 120deg/7m, 3V	**€ 30.95**
843529	RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT	**€ 47.95**

LUCEA

The LUCEA series includes pendant, ceiling and track luminaires and impresses with its timeless design and flexible customisation options.

lenses
Depending on the model, you can narrow or widen the beam angle of the LUCEA luminaires using the easily replaceable lenses.

reflector rings
With the reflector rings [available for all models in black, white and gold], you can set colourful accents depending on the surroundings and atmosphere.

door panels
With the optional barn door trim, you can limit the light emission of the LUCEA luminaires with particular precision using four individually adjustable wings.

LUCEA-VARIETY

surface-mounted lights
The LUCEA surface-mounted luminaires are available as pendant luminaires, as swivelling and tilting ceiling luminaires with a base and as fixed spotlights.

1-phase luminaires
The pendant luminaires with a particularly soft
textile cable and the spotlights for use on single-circuit track systems are primarily aimed at private users looking for a slim and versatile solution for the home.

3-phase luminaires
The LUCEA luminaires for 3-phase 230V track systems are available as ceiling and pendant
versions and, thanks to the CCT dip switch, are particularly suitable for commercial use in bars, restaurants or offices.

FLEXIBLE COLOUR TEMPERATURE

The colour temperature has a decisive influence on the lighting effect in the room. For this reason, the LUCEA series is available in different colour temperatures, depending on the model and intended use. With an Ra value >90, the LUCEA luminaires also guarantee true-to-life colour rendering of walls, ceilings and objects. Using the LUCEA ceiling light as an example, you can see in the illustrations below how the light colour and lighting mood change depending on the model version - from warm white to neutral white and as a flexible dim-to-warm version.

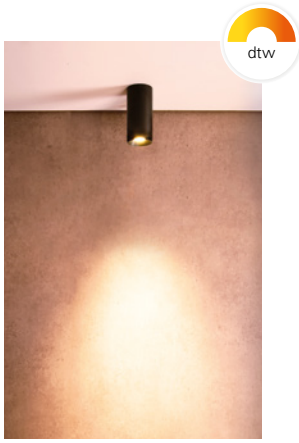

dim-to-warm

[1,800K - 2.700K]
In the dim-to-warm version, the colour temperature adjusts automatically when dimming [the lower the light intensity, the warmer the colour temperature].

2,700 K
For private users: the lights with extra warm white 2,700K.

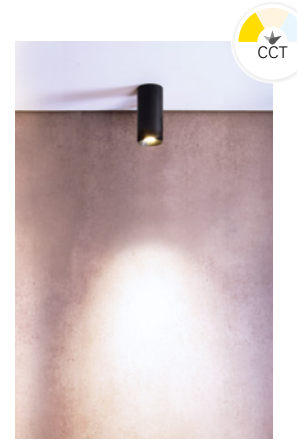

3,000 K
For commercial applications: The surface-mounted and 3-phase luminaires offer a CCT dip switch to switch between 3,000K [warm white] and 4,000K [neutral white].

4,000 K
In addition to the CCT versions, the 3-phase spotlights with 40W are also available as a pure 4,000K [neutral white] version.

FLEXIBLE BEAM ANGLE

Wide, soft light or a precise, focussed spot – with the LUCEA series you have the choice, even retrospectively. In addition to the standard beam angle of 36°, the luminaires can be narrowed or widened in all versions [surface-mounted, pendant, track] using optionally available lenses. You are even more flexible with the optional, colour-matching barndoor cover. With its four wings, the light emission can be adapted to different room and object geometries. The illustrations below show how the light emission of the LUCEA changes through the use of different lenses and the barndoor.

24°
narrow beam angle with optional 24° lens

36°
standard beam angle with 36° lens [standard]

60°
wide beam angle with optional 60° lens







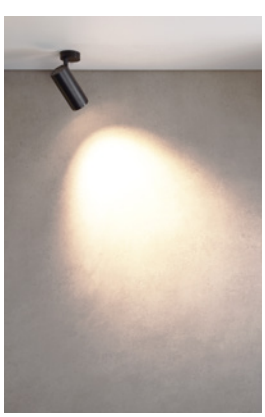

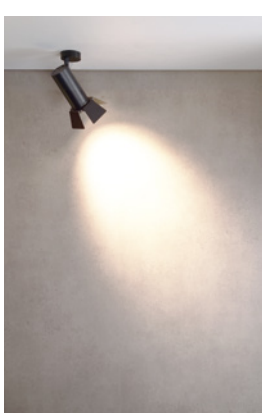

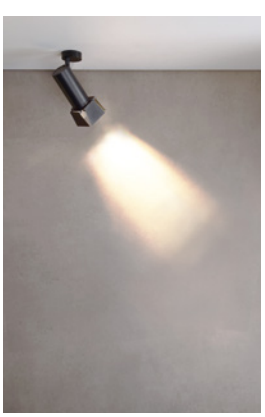

door panels
individual limitation of the beam angle with the wings of the barn door panel

DALI Phase Ra>90 SDCM<3

LUCEA DALI

- **emergency current capable [176-280V/DC EOFI: 100%]**
- **incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium
Colour Temperature	2700 K
Luminous Flux	1300 lm
Length	65 mm
Width	65 mm
Height	157 mm
Power	10 W
Rated Input Voltage	200-240 V/AC
Voltage range emergency lighting	176-280 V/DC

EOFI	100 %
Power Supply Unit incl.	Yes
Pendulum Length	1600 mm
Light Beam Angle	36 Degree
Control	DALI 2 / DT6, Push-Dim
CRI (Ra)	90
IK Protection Class	IK03



707244

Article	Housing Color		Price
707244	White	WW	**€ 119.95**
707245	Black	WW	**€ 119.95**

IP20 EL

Accessories

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

CCT DALI Phase Ra>90 SDCM<3

LUCEA CCT DALI

- **emergency current capable [176-280V/DC EOFI: 100%]**
- **light colour adjustable in two stages**
- **incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Pendulum Length	1600 mm
Colour Temperature	3000/4000 K	Light Beam Angle	36 Degree
Rated Input Voltage	200-240 V/AC	Control	DALI 2 / DT6, Push-Dim
Voltage range emergency lighting	176-280 V/DC	CRI (Ra)	90
EOFI	100 %	IK Protection Class	IK03
Power Supply Unit incl.	Yes		



707234

Article	Housing Color		Luminous Flux	Length	Width	Height	Power	Price
707234	White	WW NW	930/1000 lm	65 mm	65 mm	157 mm	11.0 W	**€ 123.95**
707235	Black	WW NW	930/1000 lm	65 mm	65 mm	157 mm	11.0 W	**€ 123.95**
707238	White	WW NW	1930/2000 lm	85 mm	85 mm	178 mm	20.0 W	**€ 159.95**
707239	Black	WW NW	1930/2000 lm	85 mm	85 mm	178 mm	20.0 W	**€ 159.95**

IP20 EL

Accessories for **707234**, **707235**

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

Accessories for **707238**, **707239**

930680	Lens 24° for Lucea 15/20	**€ 9.95**
930681	Lens 60° for Lucea 15/20	**€ 9.95**
930759	Reflector ring for Lucea 15/20 white	**€ 4.75**
930760	Reflector ring for Lucea 15/20 black	**€ 4.75**
930761	Reflector ring for Lucea 15/20 gold	**€ 4.75**



CCT Phase Ra>90 SDCM<5

LUCEA CCT

- **Light colour adjustable in two stages**
- **Incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90
Pendulum Length	1800 mm	IK Protection Class	IK03



707124

Article	Housing Color		Luminous Flux	Height	Ø	Power	Price
707124	White	WW NW	930/1000 lm	157 mm	65 mm	10.0 W	**€ 119.95**
707125	Black	WW NW	930/1000 lm	157 mm	65 mm	10.0 W	**€ 119.95**
707128	White	WW NW	1930/2000 lm	178 mm	85 mm	20.0 W	**€ 151.95**
707129	Black	WW NW	1930/2000 lm	178 mm	85 mm	20.0 W	**€ 151.95**

IP20

Accessories for **707124**, **707125**

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

Accessories for **707128**, **707129**

930680	Lens 24° for Lucea 15/20	**€ 9.95**
930681	Lens 60° for Lucea 15/20	**€ 9.95**
930759	Reflector ring for Lucea 15/20 white	**€ 4.75**
930760	Reflector ring for Lucea 15/20 black	**€ 4.75**
930761	Reflector ring for Lucea 15/20 gold	**€ 4.75**

page 26

page 60

page 62

page 297

page 404





dtw Phase Ra>90

LUCEA DTW

- **high colour rendering**
- **Dim-to-warm 1,800K-2,700K**
- **incl. black reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	1800-2700 K	Pendulum Length	1800 mm
Luminous Flux	750 lm	Light Beam Angle	36 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm		
Power	10 W	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03



707217

Article	Housing Color		Price
707217	White	WW	**€ 108.95**
707218	Black	WW	**€ 108.95**

IP20

Accessories

930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

DALI Phase Ra>90 SDCM<3

LUCEA DALI

- **emergency current capable [176-280V/DC EOFI: 100%]**
- **incl. black reflector ring**
- **can be customised with a wide range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Swivelling Angle	90 Degree
Length	113 mm	Control	DALI 2 / DT6, Intelli Push-Dim
Rated Input Voltage	200-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90
Light Beam Angle	36 Degree	IK Protection Class	IK03
Rotation Angle	350 Degree		


707240

Article	Housing Color	Colour Temperature	Luminous Flux	Width	Height	Power	Price
707240	White	WW 2700 K	1950 lm	85 mm	269 mm	15.0 W	**€ 127.95**
707241	Black	WW 2700 K	1950 lm	85 mm	269 mm	15.0 W	**€ 127.95**
707242	White	NW 4000 K	4480 lm	100 mm	315 mm	40.0 W	**€ 171.95**
707243	Black	NW 4000 K	4480 lm	100 mm	315 mm	40.0 W	**€ 171.95**

IP20 EL

Accessories for **707240**, **707241**

930680	Lens 24° for Lucea 15/20	**€ 9.95**
930681	Lens 60° for Lucea 15/20	**€ 9.95**
930754	Door panel for Lucea 15/20 white	**€ 18.95**
930755	Door panel for Lucea 15/20 black	**€ 18.95**
930759	Reflector ring for Lucea 15/20 white	**€ 4.75**
930760	Reflector ring for Lucea 15/20 black	**€ 4.75**
930761	Reflector ring for Lucea 15/20 gold	**€ 4.75**

Accessories for **707242**, **707243**

930677	Door panel for Lucea 30/40 white	**€ 19.95**
930678	Door panel for Lucea 30/40 black	**€ 19.95**
930682	Lens 24° for Lucea 30/40	**€ 12.95**
930684	Lens 60° for Lucea 30/40	**€ 12.95**
930762	Reflector ring for Lucea 30/40 white	**€ 5.45**
930763	Reflector ring for Lucea 30/40 black	**€ 5.45**
930764	Reflector ring for Lucea 30/40 gold	**€ 5.45**

CCT DALI Phase Ra>90 SDCM<3

LUCEA CCT DALI

- **emergency current capable [176-280V/DC EOFI: 100%]**
- **light colour adjustable in 2 shades**
- **incl. black reflector ring**
- **can be customised with a wide range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000 K	Light Beam Angle	36 Degree
Luminous Flux	2700/2900 lm	Rotation Angle	350 Degree
Length	113 mm	Swivelling Angle	90 Degree
Width	100 mm	Control	DALI 2 / DT6, Intelli Push-Dim
Height	302 mm		
Power	33 W	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03



707232

Article	Housing Color		Price
707232	White	WW NW	**€ 171.95**
707233	Black	WW NW	**€ 171.95**

IP20 EL

Accessories

930677	Door panel for Lucea 30/40 white	**€ 19.95**
930678	Door panel for Lucea 30/40 black	**€ 19.95**
930682	Lens 24° for Lucea 30/40	**€ 12.95**
930684	Lens 60° for Lucea 30/40	**€ 12.95**
930762	Reflector ring for Lucea 30/40 white	**€ 5.45**
930763	Reflector ring for Lucea 30/40 black	**€ 5.45**
930764	Reflector ring for Lucea 30/40 gold	**€ 5.45**

CCT Phase Ra>90 SDCM<5

LUCEA CCT

- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**
- **Light colour adjustable in two stages**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Swivelling Angle	90 Degree
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90
Light Beam Angle	36 Degree	IK Protection Class	IK03
Rotation Angle	350 Degree		


707116

Article	Housing Color			Luminous Flux	Height	Ø	Power	Price
707116	White	WW	NW	930/1000 lm	249 mm	65 mm	10.0 W	**€ 111.95**
707117	Black	WW	NW	930/1000 lm	249 mm	65 mm	10.0 W	**€ 111.95**
707118	White	WW	NW	1460/1500 lm	269 mm	85 mm	15.0 W	**€ 127.95**
707119	Black	WW	NW	1460/1500 lm	269 mm	85 mm	15.0 W	**€ 127.95**
707120	White	WW	NW	1930/2000 lm	269 mm	85 mm	20.0 W	**€ 143.95**
707121	Black	WW	NW	1930/2000 lm	269 mm	85 mm	20.0 W	**€ 143.95**
707122	White	WW	NW	2700/2900 lm	302 mm	100 mm	30.0 W	**€ 159.95**
707123	Black	WW	NW	2700/2900 lm	302 mm	100 mm	30.0 W	**€ 159.95**

IP20

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

Accessories for **707116**, **707117**

930679	Lens 24° for Lucea 6/10	**€ 7.95**
930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

Accessories for **707118**, **707119**, **707120**, **707121**

930680	Lens 24° for Lucea 15/20	**€ 9.95**
930681	Lens 60° for Lucea 15/20	**€ 9.95**
930754	Door panel for Lucea 15/20 white	**€ 18.95**
930755	Door panel for Lucea 15/20 black	**€ 18.95**
930759	Reflector ring for Lucea 15/20 white	**€ 4.75**
930760	Reflector ring for Lucea 15/20 black	**€ 4.75**
930761	Reflector ring for Lucea 15/20 gold	**€ 4.75**

Accessories for **707122**, **707123**

930677	Door panel for Lucea 30/40 white	**€ 19.95**
930678	Door panel for Lucea 30/40 black	**€ 19.95**
930682	Lens 24° for Lucea 30/40	**€ 12.95**
930684	Lens 60° for Lucea 30/40	**€ 12.95**
930762	Reflector ring for Lucea 30/40 white	**€ 5.45**

page 26

page 60

page 62

page 296

page 400

Phase Ra>90 SDCM<5 UGR<16

LUCEA

- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium
Colour Temperature	4000 K
Luminous Flux	4480 lm
Height	211 mm
Ø	100 mm
Power	40 W
Rated Input Voltage	200-240 V/AC
Power Supply Unit incl.	Yes

Light Beam Angle	36 Degree
Rotation Angle	350 Degree
Swivelling Angle	90 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	90
IK Protection Class	IK03


707183

Article	Housing Color		Price
707183	White	NW	**€ 159.95**
707184	Black	NW	**€ 159.95**

IP20

Accessories

930682	Lens 24° for Lucea 30	**€ 12.95**
930684	Lens 60° for Lucea 30	**€ 12.95**
930677	Door panel for Lucea 30/40 white	**€ 19.95**
930678	Door panel for Lucea 30/40 black	**€ 19.95**
930762	Reflector ring for Lucea 30/40 white	**€ 5.45**
930763	Reflector ring for Lucea 30/40 black	**€ 5.45**
930764	Reflector ring for Lucea 30/40 gold	**€ 5.45**

dtw Phase Ra>90

LUCEA DTW

- **Dim-to-warm 1,800K - 2,700K**
- **incl. black reflector ring**
- **Can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium
Colour Temperature	1800-2700 K
Luminous Flux	750 lm
Height	249 mm
Ø	65 mm
Power	10 W
Rated Input Voltage	200-240 V/AC

Power Supply Unit incl.	Yes
Light Beam Angle	36 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	90
IK Protection Class	IK03


707213

Article	Housing Color		Price
707213	White	WW	**€ 87.95**
707214	Black	WW	**€ 87.95**

IP20

Accessories

930752	Door panel for Lucea 6/10 white	**€ 17.95**
930753	Door panel for Lucea 6/10 black	**€ 17.95**
930756	Reflector ring for Lucea 6/10 white	**€ 3.95**
930757	Reflector ring for Lucea 6/10 black	**€ 3.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 3.95**

page 26

page 60

page 62

page 400

Phase Ra>90 UGR<19



SLIM

- **Extra-soft fabric cable**
- **Glare-free due to low UGR value [<19]**
- **Suspended mounting up to 1,800 mm**
- **Slim design at just 39 mm in diameter**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Pendulum Length	1500 mm
Luminous Flux	500 lm	Light Beam Angle	24 Degree
Height	300 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	39 mm		
Power	5 W	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC		



707162

Article	Housing Color		Price
707161	Black	WW	**€ 74.95**
707162	White	WW	**€ 74.95**

IP20

Accessories

930744	Reflector ring white for Slim series	**€ 3.95**
930745	Reflector ring black for Slim series	**€ 3.95**
930746	Reflector ring gold-coloured for Slim series	**€ 4.75**
930747	24° lens for Slim series	**€ 3.95**
930749	60° lens for Slim series	**€ 3.95**
930748	36° lens for Slim series	**€ 3.95**

page 24

page 295

Phase Ra>90 UGR<19

SLIM

- **glare-free, thanks to low UGR value [<19]**
- **slim design with a diameter of only 39 mm**
- **incl. silver-coloured reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Luminous Flux	500 lm	Rotation Angle	330 Degree
Height	213 mm	Swivelling Angle	60 Degree
Ø	39 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Power	5 W		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90



707203

Article	Housing Color		Price
707203	White	WW	**€ 65.95**
707204	Black	WW	**€ 65.95**

IP20

Accessories

930744	Reflector ring white for Slim series	**€ 3.95**
930745	Reflector ring black for Slim series	**€ 3.95**
930746	Reflector ring gold-coloured for Slim series	**€ 4.75**
930747	24° lens for Slim series	**€ 3.95**
930748	36° lens for Slim series	**€ 3.95**
930749	60° lens for Slim series	**€ 3.95**

BATTERY LIGHTS

414 battery lights

page 414

page 416

battery and solar lights

CANIS SET

Discover our portable cordless LED lamps from the CANIS series. With a 3.5 W output and 270 lm of brightness, our lamps provide a particularly wide and pleasant light distribution. And the infinitely variable dimming function allows you to set the perfect illumination using the practical touch sensor. Choose from two light colour levels to create the perfect atmosphere. And the best part? One battery charge is enough for more than eight hours of lighting. You can charge up to six lamps at the same time with the optional charging dock, so you always have enough lights to hand. Choose from eight colours, including trendy pastel tones, to reflect your personal style.

Note: Includes USB charging base

CANIS SET

- **Pleasant and wide light distribution**
- **More than eight hours of light after charging**
- **Infinitely dimmable via touch sensor**
- **Light colour adjustable in two stages**
- **Charge up to six cordless lamps using the stackable charging dock [optional]**
- **Includes USB charging base**

Application Area
Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living, Hotel / catering

Housing	Aluminium	Ø	112 mm
Surface	Matt	Power	3.5 W
Colour Temperature	2200/3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	270 lm	Light Beam Angle	100 Degree
Height	370 mm	CRI (Ra)	80

Article	Housing Color		Price
620194	Sand	WW	**€ 87.95**
620195	Green	WW	**€ 87.95**
620196	Terracotta	WW	**€ 87.95**
620197	Blue	WW	**€ 87.95**
620198	Rust	WW	**€ 87.95**
620199	White	WW	**€ 87.95**
620200	Black	WW	**€ 87.95**
620201	Dark grey	WW	**€ 87.95**

Accessories

930716	6-way charging station incl. power supply for Canis light	**€ 159.95**
930887	USB-A plug-in power supply 5 V DC, 1,000 mA, black	**€ 6.95**

CANIS MINI SET

Discover our portable cordless LED lamps from the CANIS series. With a 2.3 W output and 110 lm of brightness, our lamps provide a particularly wide and pleasant light distribution. And the infinitely variable dimming function allows you to set the perfect illumination using the practical touch sensor. Choose from two light colour levels to create the perfect atmosphere. And the best part? One battery charge is enough for more than eight hours of lighting. You can charge up to 15 lamps at the same time with the optional charging station, so you always have enough lights to hand. Choose from eight colours, including trendy pastel tones, to reflect your personal style.

Note: Includes USB charging base

CANIS MINI SET

- **Pleasant and wide light distribution**
- **More than eight hours of light after charging**
- **Infinitely dimmable using touch sensor**
- **Light colour adjustable in two stages**
- **Charge up to 15 cordless lamps using the stackable charging dock [optional]**
- **Includes USB charging base**

Application Area
Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living, Hotel / catering

Housing	Aluminium	Ø	76 mm
Surface	Matt	Power	2.3 W
Colour Temperature	2200/3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	110 lm	Light Beam Angle	100 Degree
Height	208 mm	CRI (Ra)	80

Article	Housing Color		Price
620202	Sand	WW	**€ 79.95**
620203	Green	WW	**€ 79.95**
620204	Terracotta	WW	**€ 79.95**
620205	Blue	WW	**€ 79.95**
620206	Rust	WW	**€ 79.95**
620207	White	WW	**€ 79.95**
620208	Black	WW	**€ 79.95**
620209	Dark grey	WW	**€ 79.95**

IP65

Accessories

930734	15-way charging station incl. power supply unit for Canis Mini light	**€ 239.95**
930887	USB-A plug-in power supply 5 V DC, 1,000 mA, black	**€ 6.95**

OUTDOOR LIGHTS

422 bollard lights
442 surface mounted wall lights
484 ceiling and wall lights
488 built in wall lights
494 spherical lamps
498 energy distributor
508 surface mounted / ground spike lights
520 wall washer
524 ground recessed lights
540 floodlight
544 display lights

bollard lights

page 422

page 424

page 427

page 428

page 430

page 432

page 434

page 436

page 438

FACADO 2 ROUND

Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides significantly improved illumination. The FACADO light is made of high-quality, die-cast aluminium and is available in dark grey or rust and in square or round designs.
The IP67 connection box features a double M20 cable gland suitable for e.g. buried cables in sizes 3x1.5 mm², 5x1.5 mm² or 3x2.5 mm².

page 460

IK05 IP65

FACADO 2 ROUND

- **IP65 weather resistance**
- **IP67 connection box suitable for e.g. buried cables 3x1.5 mm²/5x1.5 mm²/3x2.5 mm²**
- **Newly designed lamp head for improved illumination**
- **Available with an opal diffuser or a transparent diffuser with smoked glass**
- **Ideal for e.g. ST64 bulbs and A60/70 bulbs**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Rated Input Voltage	220-240 V/AC
Surface	Matt	Control	Dimmable via optional light source
Ø	108 mm	IK Protection Class	IK05
Max. Power	1x max. 20 W		

Article	Housing Color	Height	Colour of Light Output	Price
730499	Dark grey	650 mm	Smoke-coloured	**€ 119.95**
730501	Rust	650 mm	Smoke-coloured	**€ 119.95**
730500	Dark grey	650 mm	White	**€ 119.95**
730502	Rust	650 mm	White	**€ 119.95**
730503	Dark grey	1000 mm	Smoke-coloured	**€ 159.95**
730505	Rust	1000 mm	Smoke-coloured	**€ 159.95**
730504	Dark grey	1000 mm	White	**€ 159.95**
730506	Rust	1000 mm	White	**€ 159.95**

E27 IP65

Accessories

931098	Cable gland PG/M20 incl. locknut + sealing ring, IP68	**€ 1.75**

FACADO 2 SQUARE

Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides even better illumination. The FACADO light is made from high-quality die-cast aluminium and available in dark grey and in square or rounded designs.
The IP67 connection box features a double M20 cable gland suitable for buried cables in sizes 3 × 1.5 mm², 5 × 1.5 mm² or 3 × 2.5 mm², and more.

page 461

IK05 IP65

FACADO 2 SQUARE

- **IP65 weather resistance**
- **IP67 connection box suitable for e.g. buried cables 3x1.5 mm²/5x1.5 mm²/3x2.5 mm²**
- **Newly designed lamp head for improved illumination**
- **Available with an opal diffuser or a transparent diffuser with smoked glass**
- **Ideal for e.g. ST64 bulbs and A60/70 bulbs**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Max. Power	1x max. 20 W
		Rated Input Voltage	220-240 V/AC
Surface	Matt	Control	Dimmable via optional light source
Length	108 mm		
Width	108 mm	IK Protection Class	IK05

Article	Housing Color	Height	Colour of Light Output	Price
730496	Dark grey	650 mm	Smoke-coloured	**€ 119.95**
730495	Dark grey	650 mm	White	**€ 119.95**
730497	Dark grey	1000 mm	Smoke-coloured	**€ 159.95**
730498	Dark grey	1000 mm	White	**€ 159.95**

E27 IP65

Accessories
931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68 **€ 1.75**

FARO – POWERFUL, ROBUST AND EFFICIENT

FARO features a specially developed optical system that provides exceptionally wide and uniform light distribution. This minimizes shadows directly beneath the luminaire and allows large areas to be illuminated efficiently with fewer fixtures. Its robust, impact-resistant and seawater-resistant construction makes FARO the ideal solution for parks, coastal areas and other demanding environments. An optional ground spike enables flexible installation wherever permanent cabling or concrete foundations are not possible or desired. The highly shielded optical system directs more than 98% of the light downward, reducing light pollution while ensuring highly efficient area illumination.

FARO ON/OFF

- **Glare-free, downward-directed light [>98 %]**
- **Lens optics for wide homogeneous illumination with a diameter of up to 6 / 8 / 12 m**
- **IP68 connection box with through-wiring**
- **Particularly high-quality and solid construction**
- **Dirt-repellent powder coating in DB703**
- **Suitable for emergency lighting [180–264 V/DC EOFI: 100%]**
- **Seawater-resistant**

Application Area
Garden / Terrace / Balcony / Walkways, Park / public outdoor area, Object lighting / architecture

Housing	Aluminium	Power	12 W
Colour Temperature	3000 K	Rated Input Voltage	180-264 V/AC
Luminous Flux	570 lm	Power Supply Unit incl.	Yes
Ø	100 mm	CRI (Ra)	80
Base Height	60 mm	IK Protection Class	IK10
Base Ø	90 mm		



730519

Article	Housing Color		Height	Price
730519	Dark grey	WW	330 mm	**€ 219.95**
730520	Dark grey	WW	600 mm	**€ 239.95**
730521	Dark grey	WW	1000 mm	**€ 279.95**



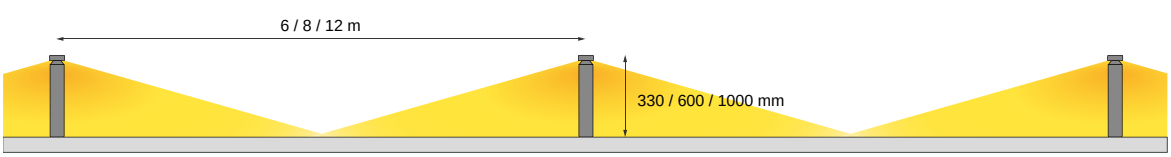

Accessories

931192	Concrete anchor for Faro 100mm series	**€ 15.95**
931193	Ground spike for Faro 100mm series	**€ 21.95**
931099	Cable gland PG/M25 incl. locknut + sealing ring, IP68	**€ 2.25**

FARO DALI

The solid FARO bollard lights made from die-cast aluminium are available in the sizes 25, 60 and 100 cm. Their design [more than 98 % of light directed downwards] and lens optics allow glare-free light distribution and a particularly large light beam of up to 10 metres in diameter. All variants are also DALI2 DT6 compatible. The FARO models can be equipped with an optional screening shade to illuminate surfaces on one side only. The IP68 connection box with possible feed-through wiring and the dirt-repellent powder coating in DB703 make the FARO bollard lights a long-lasting and high-quality choice for your outdoor lighting.

DALI IK10 IP65 SDCM<4

FARO DALI

- **Glare-free, light directed downwards [>98 %]**
- **Lens optics for wide homogeneous illumination with up to 5 / 8 / 12 m diameter**
- **Optional screening shade for darkening on one side**
- **IP68 connection box with feed-through wiring**
- **Particularly high-quality and solid construction**
- **Dirt-repellent powder coating in DB703**
- **Emergency power capable [180-264 V/DC EOFI: 100 %]**
- **Seawater-resistant**

Application Area
Garden / Terrace / Balcony / Walkways, Park / public outdoor area, Object lighting / architecture

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	360 Degree
Luminous Flux	1030 lm	Light Beam Angle 2	180 Degree
Ø	180 mm	Control	DALI 2 / DT6
Power	24 W	CRI (Ra)	80
Rated Input Voltage	180-264 V/AC	IK Protection Class	IK10



730492

Article	Housing Color		Height	Price
730492	Dark grey	WW	250 mm	**€ 351.95**
730493	Dark grey	WW	600 mm	**€ 407.95**
730494	Dark grey	WW	1000 mm	**€ 471.95**

IP65 EL

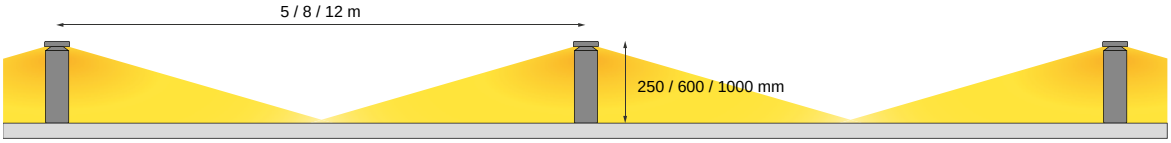

Accessories

930731	Concrete anchor for Faro 180mm series	**€ 19.95**
930776	Screening shade 180 degrees for Faro 180mm series	**€ 7.95**
931099	Cable gland PG/M25 incl. locknut + sealing ring, IP68	**€ 2.25**

LERNA

LERNA series bollard lights offer a number of advantages. The ability to adjust the light colour in 2 stages (3,000 K/4,000 K) allows you to choose the colour temperature that sets the perfect ambience. The downward orientation of the lighting also fully guarantees efficient illumination without creating light pollution. LERNA series bollard lights are available in two different sizes (600 mm and 1,000 mm). With a power rating of 7.4 W and up to 256 lm, the light itself is incredibly bright.

page 504

CCT IK06 IP65 SDCM<3

LERNA

- **Light colour adjustable in two stages**
- **Light directed fully downwards to prevent light pollution**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Luminous Flux	237/256 lm	Light Beam Angle	50 Degree
Length	120 mm	Light Beam Angle 2	100 Degree
Width	100 mm	CRI (Ra)	80
Power	7.4 W	IK Protection Class	IK06



733072

Article	Housing Color		Height	Price
733073	Dark grey	WW NW	600 mm	**€ 167.95**
733072	Dark grey	WW NW	1000 mm	**€ 207.95**

IP65

Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68 **€ 1.75**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

CATA

The CATA series impresses not only as a modern path light, but also as a standalone lighting and design feature when creating outdoor spaces. The LEDs not only ensure full-surface illumination of paths and entrance areas but also inevitably draw attention to the striking frame construction. Available in three sizes, the CATA IV models can also be combined really well.



IP54

CATA

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Base Height	20 mm
Colour Temperature	3000 K	Power	4 W
Luminous Flux	350 lm	Rated Input Voltage	100-240 V/AC
Length	151 mm	Power Supply Unit incl.	Yes
Width	61 mm	Light Beam Angle	120 Degree
Base Length	145 mm	Primary Connection End	Connection box IP65
Base Width	55 mm	CRI (Ra)	80



733040

Article	Housing Color		Height	Price
733040	Dark grey	WW	500 mm	**€ 159.95**
733041	Dark grey	WW	700 mm	**€ 175.95**
733042	Dark grey	WW	1000 mm	**€ 191.95**

IP54 A↑G F

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

CHERTAN

With its extraordinary mix of materials consisting of die-cast aluminium housing and base made of weather-resistant, fibreglass-reinforced concrete, the CHERTAN outdoor standing light certainly stands apart from other models just on looks alone. With its pleasantly warm white light and light emission angle of 120°, the outdoor light is perfectly suited for decorative use in entrance areas, on paths or in the garden.

Note: As concrete is a natural product, every surface is unique and forms a distinct patina over time, depending on local conditions. It is therefore normal in wet conditions for a blotchy surface to form that disappears again when dried, yet produces an individual patina over the long-term.

IP54 Ra>90

CHERTAN

- **Fibreglass-reinforced and weather-resistant concrete base**

Application Area
Garden / Terrace / Balcony / Walkways, Hotel / catering

Housing	Aluminium	Power	13 W
Colour Temperature	3000 K	Rated Input Voltage	100-240 V/AC
Length	170 mm	Power Supply Unit incl.	Yes
Width	72 mm	Light Beam Angle	120 Degree
Base Length	160 mm	Primary Connection End	Connection box IP54
Base Width	30 mm	CRI (Ra)	90
Base Height	40 mm		



733043

Article	Housing Color		Luminous Flux	Height	Price
733043	Dark grey	WW	480 lm	450 mm	**€ 159.95**
733044	Dark grey	WW	530 lm	600 mm	**€ 175.95**
733045	Dark grey	WW	640 lm	1000 mm	**€ 191.95**

IP54 A↑G G

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

ORTIS

The Ortis LED bollard light cuts an excellent figure anywhere with its dark grey aluminium housing and, thanks to its IP54 certification, is suitable for flexible outdoor use in gardens, entrances and as path lighting. In addition, the Ortis has an internal slatted insert in the lamp head, which ensures a pleasant dimmed light that is directed downwards (warm white, 3,000 K).

page 458

IK05 IP54

ORTIS

·Light directed downwards, dimmed by the slatted insert

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Luminous Flux	510 lm	Light Beam Angle	360 Degree
Height	1000 mm	Primary Connection End	Connection box
Ø	120 mm	CRI (Ra)	80
Power	15.9 W	IK Protection Class	IK05



733004

Article	Housing Color		Price
733004	Dark grey	WW	**€ 175.95**

IP54 A↑G G

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

TUCANAE

With its slim, unfussy housing design, the TUCANAE is a modern outdoor light that can be integrated almost anywhere. The 100-cm-high bollard light emits its warm white light diagonally downwards onto paths and other surfaces and, in the MOTION variant, has an integrated twilight switch with adjustable brightness threshold and operating time.

page 459

TUCANAE

- **Powerful and energy saving**
- **Uniform illumination**
- **Adjustable brightness threshold and operating time [733068]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Base Height	10 mm
Colour Temperature	3000 K	Power	18 W
Luminous Flux	2150 lm	Rated Input Voltage	110-240 V/AC
Length	206 mm	Power Supply Unit incl.	Yes
Width	180 mm	Light Beam Angle	120 Degree
Height	1000 mm	Primary Connection End	Connection box
Base Length	120 mm	CRI (Ra)	80
Base Width	180 mm		



733068

Article	Housing Color		IP Protection Type	Motion Detector	Type of Motion Detector	Price
733068	Dark grey	WW	IP 54	Yes	Infrared	**€ 234.95**
733069	Dark grey	WW	IP 65	No		**€ 207.95**



Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

surface mounted wall lights

page 444

page 445

page 446

page 447

page 448

page 449

page 450

page 451

page 452

page 453

page 454

page 455

page 456

page 457

page 458

page 459

page 460

page 461

page 462

page 463

page 464

page 464

page 465

page 465

page 466

page 467

page 468

page 471

page 472

page 472

page 474

page 476

page 477

page 478

page 480

SHORELINE

The SHORELINE PRO series comprises high-quality surface-mounted wall luminaires for outdoor applications and offers maximum design flexibility for modern façade and architectural lighting. With more than a dozen versions in round or square designs, available as downlight or up/down versions, as well as selected models with replaceable GU10 light sources, the series covers a wide range of applications – from residential and commercial buildings to hotels and hospitality projects.

All luminaires are made from robust die-cast aluminium, are seawater-resistant, and feature IP65 protection and IK08 impact resistance. The integrated technology allows the colour temperature [3,000 K / 4,000 K] to be switched directly on the luminaire, while the high-quality optics ensure precise and uniform light distribution.

These luminaires have been developed for use in coastal regions and can withstand the increased salt and humidity in the environment - ideal for outdoor areas near the sea.

The integrated CCT function enables flexible selection of the light colour between warm white and neutral white light. This allows the lighting to be optimised for different applications and environments.

SIMPLE INSTALLATION

The SHORELINE PRO series has been specifically designed for quick and safe safe installation and impresses with several well thought-out mounting details:

- separable mounting plate with plug-in connection for easy pre-assembly
- angled fixing screws ensure better accessibility during screw connection
- through-wiring for series mounting
- optionally available spacers enable elegant and clean surface mounting - even on uneven surfaces

ACCESSORIES FOR SHORELINE PRO

- reflector inserts: 24°, 30°, 36°, 60° [depending on model]
- covers: Slot: very narrow beam for accent lighting on the façade
  Triangle: narrow beam for accent lighting and additional light in the walkway area
- spacers: for clean surface mounting on uneven surfaces

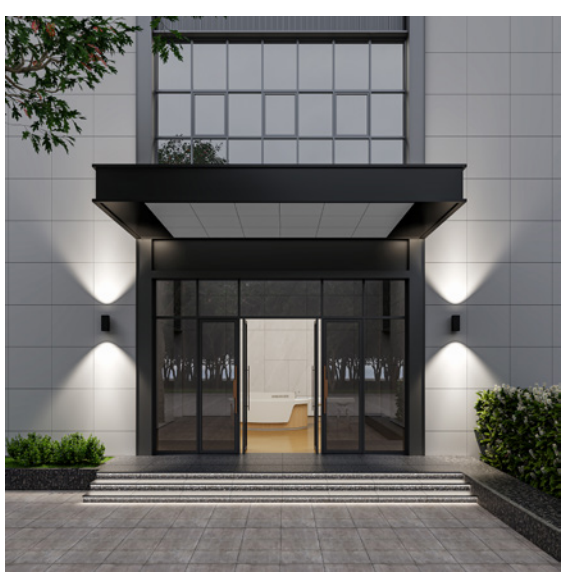

SHORELINE PRO ROUND

- **continuous wiring possible**
- **seawater-resistant**
- **easy and quick installation**
- **separable mounting plate with plug-in connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Max. Power	1x max. 7.5 W
Height	140 mm	Rated Input Voltage	220-240 V/AC
Ø	68 mm	Control	Dimmable via optional light source
Base Length	43 mm	IK Protection Class	IK08
Base Width	55 mm	Colour of Light Output	Clear
Base Height	130 mm		

Article	Housing Color	Price
731211	Light grey	**€ 71.95**
731212	Dark grey	**€ 71.95**
731213	White	**€ 71.95**

GU10 IP65

Accessories

930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

SHORELINE PRO ROUND UP+DOWN

- **continuous wiring possible**
- **seawater-resistant**
- **easy and quick installation**
- **separable mounting plate with plug-in connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Max. Power	2x max. 7.5 W
Height	158 mm	Rated Input Voltage	220-240 V/AC
Ø	68 mm	Control	Dimmable via optional light source
Base Length	43 mm		
Base Width	55 mm	IK Protection Class	IK08
Base Height	130 mm	Colour of Light Output	Clear

Article	Housing Color	Price
731214	Light grey	**€ 79.95**
731215	Dark grey	**€ 79.95**
731216	White	**€ 79.95**

GU10 IP65

Accessories

930874	Spacer for ShoreLine Pro series, light grey		**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey		**€ 4.95**
930880	Spacer for ShoreLine Pro series, white		**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3

SHORELINE PRO ROUND 68

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	6 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	480/550 lm	Power Supply Unit incl.	Yes
Height	150 mm	Light Beam Angle	30 Degree
Ø	68 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08
Base Height	130 mm		



731217

Article	Housing Color		Price
731217	Light grey	WW NW	**€ 135.95**
731218	Dark grey	WW NW	**€ 135.95**
731219	White	WW NW	**€ 135.95**

IP65

Accessories

930980	Cover, 68/70, line, ShoreLine Pro Series, dark grey	**€ 6.45**
930981	Cover, 68/70, triangular, ShoreLine Pro Series, dark grey	**€ 6.45**
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome	**€ 6.45**
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome	**€ 6.45**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3

SHORELINE PRO ROUND UP+DOWN 68

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	7.5 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	700/780 lm	Power Supply Unit incl.	Yes
Height	186 mm	Light Beam Angle	30 Degree
Ø	68 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08
Base Height	130 mm		



731220

Article	Housing Color			Price
731220	Light grey	WW	NW	**€ 159.95**
731221	Dark grey	WW	NW	**€ 159.95**
731222	White	WW	NW	**€ 159.95**

IP65

Accessories

930980	Cover, 68/70, line, ShoreLine Pro Series, dark grey	**€ 6.45**
930981	Cover, 68/70, triangular, ShoreLine Pro Series, dark grey	**€ 6.45**
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome	**€ 6.45**
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome	**€ 6.45**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3

SHORELINE PRO ROUND 100

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater-resistant**
- **easy and quick installation**
- **separable mounting plate with plug-in connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	12 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	900/1000 lm	Power Supply Unit incl.	Yes
Height	163 mm	Light Beam Angle	36 Degree
Ø	100 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm		
Base Width	80 mm	CRI (Ra)	92
Base Height	130 mm	IK Protection Class	IK08



731196

Article	Housing Color			Price
731196	Light grey	WW	NW	**€ 151.95**
731197	Dark grey	WW	NW	**€ 151.95**
731198	White	WW	NW	**€ 151.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 7.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 7.95**
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome	**€ 11.95**
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome	**€ 11.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3 UGR<19

SHORELINE PRO ROUND UP+DOWN 100

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	20 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1700/1900 lm	Power Supply Unit incl.	Yes
Height	238 mm	Light Beam Angle	36 Degree
Ø	100 mm	Control	Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base Width	80 mm	IK Protection Class	IK08
Base Height	130 mm		



731193

Article	Housing Color			Price
731193	Light grey	WW	NW	**€ 207.95**
731194	Dark grey	WW	NW	**€ 207.95**
731195	White	WW	NW	**€ 207.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 7.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 7.95**
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome	**€ 11.95**
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome	**€ 11.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3 UGR<16

SHORELINE PRO ROUND 140

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Height	218 mm	Light Beam Angle	36 Degree
Ø	140 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm		
Base Width	80 mm	CRI (Ra)	92
Base Height	130 mm	IK Protection Class	IK08



731169

Article	Housing Color			Luminous Flux	Power	Price
731169	Light grey	WW	NW	2000/2200 lm	20.0 W	**€ 207.95**
731170	Dark grey	WW	NW	2000/2200 lm	20.0 W	**€ 207.95**
731171	White	WW	NW	2000/2200 lm	20.0 W	**€ 207.95**
731172	Light grey	WW	NW	3100/3400 lm	33.0 W	**€ 239.95**
731173	Dark grey	WW	NW	3100/3400 lm	33.0 W	**€ 239.95**
731174	White	WW	NW	3100/3400 lm	33.0 W	**€ 239.95**

IP65

Accessories

930869	Cover, 140, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome	**€ 13.95**
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome	**€ 13.95**
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome	**€ 13.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3

SHORELINE PRO ROUND UP+DOWN 140

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Height	332 mm	Light Beam Angle	36 Degree
Ø	140 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm		
Base Width	80 mm	CRI (Ra)	92
Base Height	130 mm	IK Protection Class	IK08



731175

Article	Housing Color		Luminous Flux	Power	Price
731175	Light grey	WW NW	3100/3400 lm	31.0 W	**€ 287.95**
731176	Dark grey	WW NW	3100/3400 lm	31.0 W	**€ 287.95**
731177	White	WW NW	3100/3400 lm	31.0 W	**€ 287.95**
731178	Light grey	WW NW	5100/5600 lm	54.0 W	**€ 367.95**
731179	Dark grey	WW NW	5100/5600 lm	54.0 W	**€ 367.95**
731180	White	WW NW	5100/5600 lm	54.0 W	**€ 367.95**

IP65

Accessories

930869	Cover, 140, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome	**€ 13.95**
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome	**€ 13.95**
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome	**€ 13.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3



SHORELINE PRO SQUARE 70

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	6 W
Luminous Flux	480/550 lm	Rated Input Voltage	220-240 V/AC
Length	70 mm	Power Supply Unit incl.	Yes
Width	70 mm	Light Beam Angle	30 Degree
Height	150 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08



731205

Article	Housing Color		Price
731205	Light grey	WW NW	**€ 143.95**
731206	Dark grey	WW NW	**€ 143.95**
731207	White	WW NW	**€ 143.95**

IP65

Accessories

930980	Cover, 68/70, line, ShoreLine Pro Series, dark grey	**€ 6.45**
930981	Cover, 68/70, triangular, ShoreLine Pro Series, dark grey	**€ 6.45**
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome	**€ 6.45**
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome	**€ 6.45**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3 UGR<19

SHORELINE PRO SQUARE UP+DOWN 70

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	7.5 W
Luminous Flux	700/780 lm	Rated Input Voltage	220-240 V/AC
Length	70 mm	Power Supply Unit incl.	Yes
Width	70 mm	Light Beam Angle	30 Degree
Height	186 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08



731208

Article	Housing Color			Price
731208	Light grey	WW	NW	**€ 167.95**
731209	Dark grey	WW	NW	**€ 167.95**
731210	White	WW	NW	**€ 167.95**

IP65

Accessories

930980	Cover, 68/70, line, ShoreLine Pro Series, dark grey	**€ 6.45**
930981	Cover, 68/70, triangular, ShoreLine Pro Series, dark grey	**€ 6.45**
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome	**€ 6.45**
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome	**€ 6.45**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3





SHORELINE PRO SQUARE 100

- **Light colour adjustable in 2 stages**
- **through-wiring possible**
- **Seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium
Colour Temperature	3000/4000 K
Luminous Flux	900/1000 lm
Length	100 mm
Width	100 mm
Height	163 mm
Base Length	40 mm
Base Width	80 mm
Base Height	130 mm

Power	12 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	36 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	90
IK Protection Class	IK08



731202

Article	Housing Color		Price
731202	Light grey	WW NW	**€ 151.95**
731203	Dark grey	WW NW	**€ 151.95**
731204	White	WW NW	**€ 151.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 7.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 7.95**
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome	**€ 11.95**
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome	**€ 11.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3

SHORELINE PRO SQUARE UP+DOWN 100

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	21 W
Luminous Flux	1800/2000 lm	Rated Input Voltage	220-240 V/AC
Length	100 mm	Power Supply Unit incl.	Yes
Width	100 mm	Light Beam Angle	36 Degree
Height	238 mm	Control	Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base Width	80 mm	IK Protection Class	IK08



731199

Article	Housing Color			Price
731199	Light grey	WW	NW	**€ 207.95**
731200	Dark grey	WW	NW	**€ 207.95**
731201	White	WW	NW	**€ 207.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 7.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 7.95**
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome	**€ 11.95**
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome	**€ 11.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3 UGR<16

SHORELINE PRO SQUARE 140

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium
Colour Temperature	3000/4000 K
Length	140 mm
Width	140 mm
Height	218 mm
Base Length	44.5 mm
Base Width	80 mm
Base Height	130 mm

Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	36 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	90
IK Protection Class	IK08



731181

Article	Housing Color		Luminous Flux	Power	Price
731181	Light grey	WW NW	2000/2300 lm	20.5 W	**€ 215.95**
731182	Dark grey	WW NW	2000/2300 lm	20.5 W	**€ 215.95**
731183	White	WW NW	2000/2300 lm	20.5 W	**€ 215.95**
731184	Light grey	WW NW	3100/3400 lm	33.0 W	**€ 239.95**
731185	Dark grey	WW NW	3100/3400 lm	33.0 W	**€ 239.95**
731186	White	WW NW	3100/3400 lm	33.0 W	**€ 239.95**

IP65

Accessories

930869	Cover, 140, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome	**€ 13.95**
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome	**€ 13.95**
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome	**€ 13.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

CCT IK08 IP65 Ra>90 SDCM<3 UGR<12

SHORELINE PRO SQUARE UP+DOWN 140

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**



Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium
Colour Temperature	3000/4000 K
Length	140 mm
Width	140 mm
Height	332 mm
Base Length	44.5 mm
Base Width	80 mm
Base Height	130 mm

Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	36 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	90
IK Protection Class	IK08


731187

Article	Housing Color			Luminous Flux	Power	Price
731187	Light grey	WW	NW	3200/3400 lm	31.5 W	**€ 295.95**
731188	Dark grey	WW	NW	3200/3400 lm	31.5 W	**€ 295.95**
731189	White	WW	NW	3200/3400 lm	31.5 W	**€ 295.95**
731190	Light grey	WW	NW	5400/5800 lm	55.0 W	**€ 367.95**
731191	Dark grey	WW	NW	5400/5800 lm	55.0 W	**€ 367.95**
731192	White	WW	NW	5400/5800 lm	55.0 W	**€ 367.95**

IP65

Accessories

930869	Cover, 140, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome	**€ 13.95**
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome	**€ 13.95**
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome	**€ 13.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 4.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 4.95**
930880	Spacer for ShoreLine Pro series, white	**€ 4.95**

IP54

ORTIS

·downward-directed light, dimmed by the louvre insert]

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium	Base Width	77 mm
Colour Temperature	3000 K	Base Height	67 mm
Luminous Flux	510 lm	Power	15.9 W
Length	260 mm	Rated Input Voltage	220-240 V/AC
Width	120 mm	Power Supply Unit incl.	Yes
Height	181 mm	Light Beam Angle	360 Degree
Ø	120 mm	CRI (Ra)	80
Base Length	100 mm		



731031

Article	Housing Color		Price
731031	Dark grey	WW	**€ 159.95**

IP54 | 1 CH | A ↑ G | G

page 436

TUCANAE

- **Modern minimalist design**
- **Powerful and energy saving**
- **Uniform illumination**
- **Adjustable brightness threshold and operating time [model-dependent]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium	Base Width	135 mm
Colour Temperature	3000 K	Base Height	15 mm
Luminous Flux	2150 lm	Power	18 W
Length	140 mm	Rated Input Voltage	110-240 V/AC
Width	172 mm	Power Supply Unit incl.	Yes
Height	219 mm	Light Beam Angle	110 Degree
Base Length	125 mm	CRI (Ra)	80



731133

Article	Housing Color		IP Protection Type	Motion Detector	Price
731133	Dark grey	WW	IP 54	Yes	**€ 158.95**
731144	Dark grey	WW	IP 65	No	**€ 148.95**



page 438

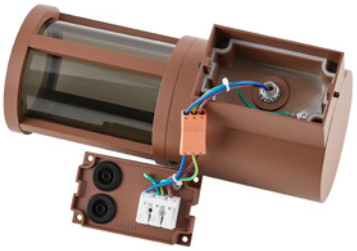

FACADO 2 ROUND

- **Feed-through wiring possible**
- **Mounting plate can be disconnected via plug**
- **Quick and secure installation**
- **IP65 weather resistance**
- **Newly designed lamp head for improved illumination**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Base Height	104 mm
Surface	Matt	Max. Power	1x max. 20 W
Height	262 mm	Rated Input Voltage	220-240 V/AC
Ø	108 mm	Control	Dimmable via optional light source
Base Length	46 mm	IK Protection Class	IK05
Base Width	64 mm		

Article	Housing Color	Colour of Light Output	Price
731153	Dark grey	Smoke-coloured	**€ 99.95**
731155	Rust	Smoke-coloured	**€ 99.95**
731154	Dark grey	White	**€ 99.95**
731156	Rust	White	**€ 99.95**

E27 IP65

page 422

FACADO 2 SQUARE

- **Feed-through wiring possible**
- **Mounting plate can be disconnected via plug**
- **Quick and secure installation**
- **IP65 weather resistance**
- **Newly designed lamp head for improved illumination**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Max. Power	1x max. 20 W
Surface	Matt	Rated Input Voltage	220-240 V/AC
Length	148 mm	Control	Dimmable via optional light source
Width	108 mm	IK Protection Class	IK05
Height	261.5 mm		

Article	Housing Color	Colour of Light Output	Price
731151	Dark grey	Smoke-coloured	**€ 99.95**
731157	Dark grey	White	**€ 99.95**

page 424

NEW IP65

ACHERNAR

· Exchangeable lamp GU10 [retrofit]

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Height	58 mm
Height	108 mm	Max. Power	1x max. 50 W
Ø	63 mm	Rated Input Voltage	220-240 V/AC
Base Length	15 mm	Control	Dimmable via optional light source
Base Width	49 mm		

Article	Housing Color	Price
731228	White	**€ 28.95**
731229	Light grey	**€ 28.95**
731230	Dark grey	**€ 28.95**
731130	Black	**€ 28.95**

GU10 IP65

NEW

IP65

ACHERNAR UP & DOWN

- **Exchangeable lamp GU10 [retrofit]**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Height	58 mm
Height	158 mm	Max. Power	2x max. 35 W
Ø	63 mm	Rated Input Voltage	220-240 V/AC
Base Length	15 mm	Control	Dimmable via optional light source
Base Width	49 mm		

Article	Housing Color	Price
731131	Black	**€ 34.95**
731231	White	**€ 35.95**
731232	Light grey	**€ 35.95**
731233	Dark grey	**€ 35.95**

GU10 IP65

IP54

CUBODO 2

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Power	8.5 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	600 lm	Power Supply Unit incl.	Yes
Length	108 mm	Light Beam Angle	19 Degree
Width	108 mm	CRI (Ra)	80
Height	115 mm	IK Protection Class	IK04


731026

Article	Housing Color		Price
731024	Dark grey	WW	**€ 127.95**
731025	Light grey	WW	**€ 127.95**
731026	White	WW	**€ 127.95**

IP54 A↑G G

IP54

CUBODO 2 UP & DOWN

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Luminous Flux	1300 lm	Light Beam Angle	19 Degree
Length	108 mm	Light Beam Angle 2	19 Degree
Width	108 mm	CRI (Ra)	80
Height	115 mm	IK Protection Class	IK04
Power	16 W		


731015

Article	Housing Color		Price
731015	Dark grey	WW	**€ 143.95**
731019	Light grey	WW	**€ 143.95**
731020	White	WW	**€ 143.95**

IP54 A↑G G

IP54

CUBODO 2 MINI

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Width	65 mm
Colour Temperature	3000 K	Base Height	20 mm
Luminous Flux	220 lm	Power	5 W
Length	90 mm	Rated Input Voltage	220-240 V/AC
Width	68 mm	Power Supply Unit incl.	Yes
Height	70 mm	Light Beam Angle	46 Degree
Base Length	65 mm	CRI (Ra)	77



731029

Article	Housing Color		Price
731029	Dark grey	WW	**€ 95.95**

IP54 A↑G G

IP54

CUBODO 2 MINI UP & DOWN

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Width	65 mm
Colour Temperature	3000 K	Base Height	20 mm
Luminous Flux	440 lm	Power	9.9 W
Length	90 mm	Rated Input Voltage	220-240 V/AC
Width	68 mm	Power Supply Unit incl.	Yes
Height	108 mm	Light Beam Angle	46 Degree
Base Length	65 mm	CRI (Ra)	77



731030

Article	Housing Color		Price
731030	Dark grey	WW	**€ 119.95**

IP54 A↑G G

CAN IP65

The CAN IP65 surface-mounted wall light is a robust and versatile solution for outdoor areas. Available as a classic wall light and as an up/down variant with light emission on both sides, it is ideal for demanding environments. The IP65 certification guarantees protection against dust and water. The widely used GU10 base enables quick and simple replacement of the lamp. Push terminals for rigid and flexible conductors facilitate simple installation. The CAN outdoor light is part of a versatile series and is also available as a pendant, ceiling, wall and reading light.

page 30

page 68

page 70

page 382

CAN IP65

- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive product family of the CAN series**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Height	87 mm
Height	108 mm	Max. Power	1x max. 7.5 W
Ø	80 mm	Rated Input Voltage	220-240 V/AC
Base Length	26 mm	Control	Dimmable via optional light source
Base Width	65 mm		

Article	Housing Color	Price
731223	White	**€ 47.95**
731224	Black	**€ 47.95**

CAN UP & DOWN IP65

- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive product family of the CAN series**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Height	166 mm
Height	212 mm	Max. Power	2x max. 7.5 W
Ø	80 mm	Rated Input Voltage	220-240 V/AC
Base Length	26 mm	Control	Dimmable via optional light source
Base Width	65 mm		

Article	Housing Color	Price
731225	White	**€ 71.95**
731226	Black	**€ 71.95**

JABBAH

The square JABBAH features integrated warm white COB LEDs and projects a 75° asymmetrical cone of light onto walls with a total luminous flux of 1,850 lumens. In addition, the double-sided JABBAH can be dimmed to 60% luminous flux via a DIP switch whenever a more subtle lighting effect is desired.

JABBAH

- **Feed-through wiring possible**
- **Mounting plate can be disconnected via plug**
- **Quick and secure installation**
- **Incl. wall spacer for surface-mounted cable entry**
- **Power adjustable in 2 stages (model-dependent)**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power Selectable	13 W, 25 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1850 lm	Power Supply Unit incl.	Yes
Length	150 mm	Light Beam Angle	75 Degree
Width	150 mm	CRI (Ra)	80
Height	150 mm		



731127

Article	Housing Color		Price
731127	Dark grey	WW	**€ 279.95**

IP65 A↑G G

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

23

IP54

ARCTURUS

- **Continuously adjustable light emission angle 0-90°**
- **Uplight and downlight separately adjustable**
- **Ideal for customised lighting accents**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	90 Degree
Power	6 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC		



731099

Article	Housing Color		Luminous Flux	Length	Width	Height	Base Length	Price
731099	Dark grey	WW	200 lm	110 mm	79 mm	172 mm	68 mm	**€ 87.95**
731100	Dark grey	WW	208 lm	105 mm	140 mm	145 mm	75 mm	**€ 87.95**

IP54 A↑G G

IP65

LINEAR

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	15 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Width	60 mm	Power Supply Unit incl.	Yes
Height	60 mm	Light Beam Angle	100 Degree
Base Width	53 mm	CRI (Ra)	80



731135

Article	Housing Color		Luminous Flux	Length	Base Length	Power	EEI	Price
731135	Dark grey	WW	600 lm	250 mm	242 mm	8.0 W	G	**€ 119.95**
731134	Dark grey	WW	1230 lm	500 mm	493 mm	14.0 W	F	**€ 155.95**

IP65

IP65

LINEAR UP & DOWN

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	15 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Width	60 mm	Power Supply Unit incl.	Yes
Height	60 mm	Light Beam Angle	100 Degree
Base Width	53 mm	CRI (Ra)	80



731129

Article	Housing Color		Luminous Flux	Length	Base Length	Power	Price
731136	Dark grey	WW	1155 lm	250 mm	242 mm	14.0 W	**€ 147.95**
731129	Dark grey	WW	1760 lm	500 mm	493 mm	20.0 W	**€ 171.95**

IP65 A↑G G

RILONGO

The RILONGO surface-mounted wall light impresses with its modern, simple design and stylishly sets the scene for facades, entrance areas and patios. The light emission on both sides creates effective lighting accents on the wall, providing both orientation and a pleasant atmosphere.

Made from robust die-cast aluminium and equipped with an IP54 protection rating, the light is ideal for permanent outdoor use. The E27 socket allows a free choice of light source up to max. 15 W and therefore offers flexible options for light colour and lighting mood.

NEW IK05 IP54

RILONGO

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	103 mm	Control	Dimmable via optional light source
Width	250 mm		
Height	110 mm	IK Protection Class	IK05
Max. Power	1x max. 15 W	Colour of Light Output	White

Article	Housing Color	light emission	Price
730330	Dark grey	top / bottom	**€ 63.95**
731060	Dark grey	top / bottom / front [grille]	**€ 63.95**
731227	Dark grey	top / bottom / front	**€ 63.95**

E27 IP54

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

ALKES

The ALKES series is not a traditional wall-mounted light, but, with its SMD-LED panel, has floodlight similarities. The highlight: the upper housing part is tilted forwards 45° from the façade to direct the warm white light in a targeted manner onto the surface to be illuminated. In addition, the ALKES also looks great when switched off with its modern design and rounded edges.

IP65

ALKES

- **high luminous efficacy**
- **homogeneous light distribution**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	110 Degree
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80



731138

Article	Housing Color		Luminous Flux	Length	Width	Height	Power	Price
731138	Dark grey	WW	920 lm	200 mm	126 mm	184 mm	21.0 W	**€ 83.95**
731140	Dark grey	WW	1720 lm	297 mm	165 mm	240 mm	36.0 W	**€ 140.95**



IP65

ALKES MOTION

- **high luminous efficacy**
- **homogeneous light distribution**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Light Beam Angle	110 Degree
Colour Temperature	3000 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Motion Detector	Yes
Power Supply Unit incl.	Yes		



731139

Article	Housing Color		Luminous Flux	Length	Width	Height	Power	Price
731139	Dark grey	WW	735 lm	200 mm	126 mm	184 mm	21.0 W	**€ 99.95**
731141	Dark grey	WW	1720 lm	297 mm	165 mm	240 mm	36.0 W	**€ 156.95**

GRUMIUM SQUARE CCT

Modular, compact, impactful - the GRUMIUM wall-mounted light can be installed on patios, building walls or in entrances to living spaces and, due to its optional covers in different designs, provides a flexible universal solution for many areas of application. The permanently installed and energy-saving LEDs delivering max. 10 watts are encompassed by a diffuser made of milky plastic and produce a pleasant warm-white light with a luminous flux of 730 lm. The Grumium outdoor light with die-cast aluminium housing comes in an angular and rounded design and has degree of protection IP54.

CCT IP54

GRUMIUM SQUARE CCT

· light colour adjustable in 2 stages

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Base Width	15 mm
Colour Temperature	3000/4000 K	Base Height	195 mm
Length	100 mm	Power	10 W
Width	70 mm	Rated Input Voltage	220-240 V/AC
Height	200 mm	Power Supply Unit incl.	Yes
Base Length	95 mm	CRI (Ra)	80



620123

Article	Housing Color			Luminous Flux	Shape cover	Price
620124	Dark grey	WW	NW	205 lm	lines diagonal	**€ 91.95**
620125	Dark grey	WW	NW	280 lm	lines horizontally	**€ 91.95**
620126	Dark grey	WW	NW	300 lm	lines vertical	**€ 91.95**
620127	Dark grey	WW	NW	440 lm	upside/below	**€ 91.95**
620123	Dark grey	WW	NW	450 lm	borders	**€ 91.95**
731126	Dark grey	WW	NW	530 lm	without	**€ 63.95**

IP54 A↑G F

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

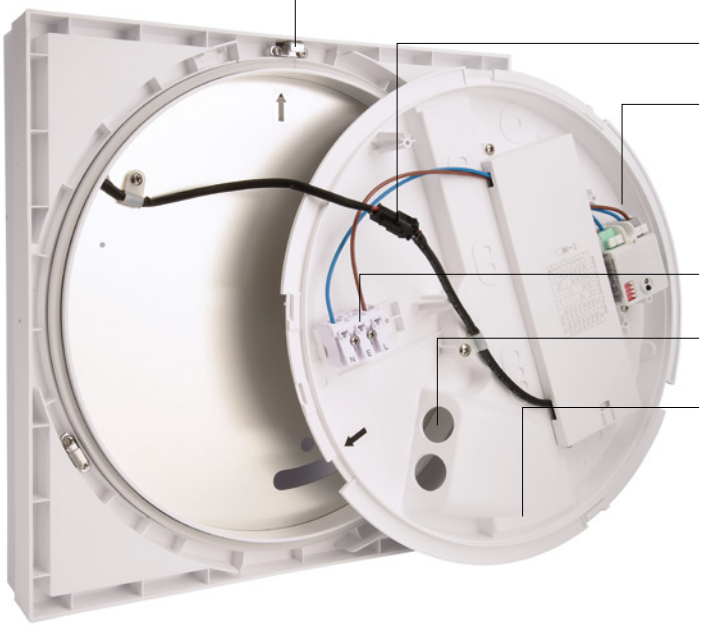

CASA

The CASA house number light has space for up to four digits and/or letters each 10 cm high, ensuring house numbers can be easily read. With a configurable twilight switch, the wall light automatically adjusts to the ambient brightness. The light colour can also be adjusted in two stages (3,000 K/4,000 K).

Multiple cable entries and the option of feed-through wiring mean that installation is simple and flexible. Anti-theft protection also prevents unauthorised removal.

Note: Stickers for numbers/letters are optionally available

CCT IK08 IP54

CASA

- **Space for four digits and letters each 10 cm high**
- **Adjustable daylight sensor**
- **Adjustable light colour 3,000/4,000 K**
- **Multiple cable entries incl. feed-through wiring**
- **Easy and quick mounting with anti-theft protection**
- **Set of number/letter stickers optionally available**

Application Area
Reception / Communication, Garden / Terrace / Balcony / Walkways, Garage / carport / car park

Surface	Matt	Power	3 W
Colour Temperature	3000/4000 K	Rated Input Voltage	200-240 V/AC
Length	275 mm	Power Supply Unit incl.	Yes
Width	275 mm	Light Beam Angle	120 Degree
Height	64 mm	CRI (Ra)	80
Base Height	14 mm	Light Direction	Front
Base Ø	245 mm	IK Protection Class	IK08



731158

Article	Housing Color		Luminous Flux	Housing	Price
731159	Black	WW NW	250/260 lm	PP - Polypropylene	**€ 87.95**
731158	White	WW NW	270/280 lm	Polycarbonate	**€ 87.95**

IP54

Accessories

930807	Numbers set 0-9 for Casa	**€ 8.95**
930808	Letters set A-F for Casa	**€ 5.45**

ceiling and wall lights

page 484

page 485

IP54

MOB

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	92 mm	Control	Dimmable via optional light source
Ø	108 mm		
Max. Power	1x max. 9 W		

Article	Housing Color	Price
730408	Dark grey	**€ 57.95**

GX53 IP54

Accessories

180195	LED, GX53, 230 V/AC, 4,000 K, 120 degrees	**€ 17.95**
180196	LED, GX53, 230 V/AC, 3,000 K, 120 degrees	**€ 17.95**

IK08 IP65 UGR<10

MENSAE

- **Corridor function**
- **Adjustable motion detector [hold time / detection area]**
- **Daylight sensor**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door

Housing	Aluminium	Rated Input Voltage	100-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Height	54 mm	CRI (Ra)	80
Base Height	28.5 mm	Motion Detector	Yes
Base Ø	170 mm	IK Protection Class	IK08
Power	16 W		



348071

Article	Housing Color		Luminous Flux	Length	Width	Ø	Light Beam Angle	Price
348071	Dark grey	WW	1400 lm	300 mm	300 mm		115 Degree	**€ 199.95**
348072	Dark grey	WW	1500 lm			300 mm	110 Degree	**€ 199.95**

IP65

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

built in wall lights

page 488

page 489

page 490

page 490

IP65

LIGHT BASE 2

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Luminous Flux	55 lm	Installation Depth	70 mm
Length	96 mm	Cut Out Length	95 mm
Width	96 mm	Cutout L x W	95 x 95 mm
Height	77 mm	Cut Out Width	95 mm
Power	1.3 W	CRI (Ra)	80

Article	Housing Color		Price
763025	Grey	WW	**€ 79.95**

IP65

LIGHT BASE II COB OUTDOOR

Housing	Aluminium	Width	100 mm
Length	100 mm		

Article	Housing Color	light output	Height	Price
930419	White	stripe	8 mm	**€ 16.95**
930414	Light grey	stripe	8 mm	**€ 15.95**
930420	Black	stripe	8 mm	**€ 15.95**
930416	White	step	24 mm	**€ 15.95**
930417	Light grey	step	24 mm	**€ 15.95**
930418	Black	step	24 mm	**€ 15.95**
930421	White	linear	24 mm	**€ 16.95**
930422	Light grey	linear	24 mm	**€ 15.95**
930415	Black	linear	24 mm	**€ 15.95**
930413	White	round	24 mm	**€ 16.95**
930423	Light grey	round	24 mm	**€ 15.95**
930424	Black	round	24 mm	**€ 15.95**

IP65 Ra>90

LIGHT BASE 3

Housing	Aluminium
Colour Temperature	3000 K
Luminous Flux	88 lm
Length	245 mm
Width	85 mm
Height	78 mm
Power	4.3 W
Rated Input Voltage	220-240 V/AC

Power Supply Unit incl.	Yes
Installation Depth	78 mm
Light Beam Angle	115 Degree
Cut Out Length	245 mm
Cutout L x W	245 x 85 mm
Cut Out Width	85 mm
CRI (Ra)	90



930461

Article	Housing Color		Price
763026	Black	WW	**€ 95.95**

IP65 A↑G G

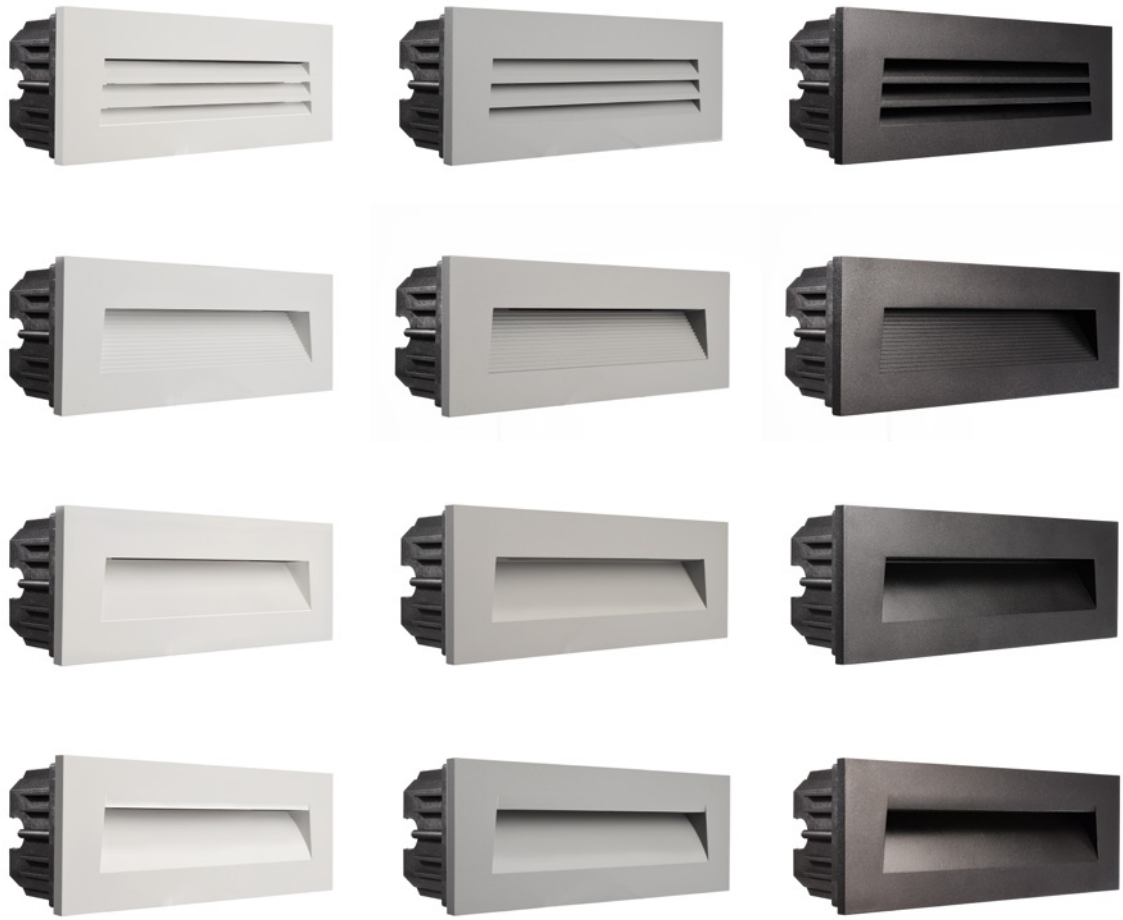

LIGHT BASE III OUTDOOR

Housing	Aluminium	Width	90 mm
Length	250 mm		

Article	Housing Color	light output	Height	Price
930470	White	stripe	9 mm	**€ 47.95**
930471	Grey	stripe	9 mm	**€ 47.95**
930472	Black	stripe	9 mm	**€ 47.95**
930461	White	step	24 mm	**€ 47.95**
930468	Light grey	step	24 mm	**€ 47.95**
930469	Black	step	24 mm	**€ 47.95**
930473	White	angled	24 mm	**€ 47.95**
930474	Light grey	angled	24 mm	**€ 47.95**
930475	Black	angled	24 mm	**€ 47.95**
930476	White	rounded	24 mm	**€ 47.95**
930477	Light grey	rounded	24 mm	**€ 47.95**
930478	Black	rounded	24 mm	**€ 47.95**

page 494

spherical lamps

DORADUS

Light in its most beautiful form - the sphere is and remains one of the most striking of shapes. With the opportunity to illuminate it from within, what could be better. The spherical light looks great both indoors and outdoors. Using a dimmable LED lamp with RGB or colour change function achieves the optimal effect. Be mesmerised with cosy red, calming green and deep blue. With a warm white lamp too, the light emanating from this spherical light is something rather special.

IK07 IP65

DORADUS

- **Spherical housing with IP65 protection**
- **Resistant to sea water**
- **Ready to use with 3 m connecting cable**
- **Incl. ground spike**

Application Area
Garden / Terrace / Balcony / Walkways, Hotel / catering

Housing	Polyethylene	Primary Connection End	Power plug IP44
Max. Power	1x max. 23 W	Control	Dimmable via optional light source
Rated Input Voltage	220-240 V/AC		
Primary Cable Length	3 m	IP Protection Type Plug	IP 44

Article	Housing Color	Height	Ø	Price
836011	White	230 mm	250 mm	**€ 111.95**
836930	White	350 mm	380 mm	**€ 135.95**
836014	White	420 mm	450 mm	**€ 159.95**
836931	White	530 mm	560 mm	**€ 255.95**

E27 IP65

Accessories

843533	RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad	**€ 37.95**
843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 55.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 87.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 59.95**

Accessories for **836931**

843534	RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad	**€ 51.95**

energy distributor

page 498

page 500

page 502

page 504

ARAWAN

Sometimes it's about more than just light. With our multiple socket tower, available with or without light, another gap in our range is filled. Design your garden even more flexibly, in proven DEKO-LIGHT quality of course and at a price that won't break the bank.

IP44

ARAWAN

- **Safe power distribution outdoors**
- **Total load max. 3,680 W**
- **Outlets and lights can be switched on separately**
- **Connection box with IP67 and accessories including in scope of delivery**
- **Feed-through wiring possible**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Ø	100 mm	Primary Connection End	Connection box IP67
Connected Load max.	3680 W		

Article	Housing Color	Colour Temperature	Luminous Flux	Height	Power	Power Supply incl.	EEI	Price
733055	Dark grey			400 mm				**€ 95.95**
733054	Dark grey	WW 3000 K	150 lm	478 mm	4.8 W	Yes	F	**€ 135.95**

IP44

Accessories
931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68 **€ 1.75**

PUKA MANA

A garden is pure nature and yet needs power in several different places. With the PUKA MANA, you can flexibly access power to operate lawnmowers and other gardening tools or simply to charge your e-bike or smartphone. The multiple socket tower has two socket outlets and can be installed particularly easily using our multi-outdoor cable connectors. The sophisticated cable routing ensures a clean visual design.

IP54

PUKA MANA

- **Door can be completely closed when angled plugs are plugged in**
- **Total load: max. 3,680 W**
- **Easy to install thanks to IP68 cable connector**
- **Light can be switched on separately [only art. no. 733067]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Connected Load max.	3680 W
Length	100 mm	Rated Input Voltage	220-240 V/AC
Width	100 mm	Primary Connection End	Connection box IP67

Article	Housing Color	Height	Socket / Base	Max. Power	IK Protection Class	Price
733066	Dark grey	420 mm			IK10	**€ 135.95**
733067	Dark grey	620 mm	E27	1x max. 13.0 W		**€ 199.95**

IP54

Accessories
931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68 **€ 1.75**

Accessories for **733066**
931073 Cover for Multiple socket tower Puka Mana 420 mm **€ 7.95**

FACADO SOCKET

FACADO series standing lights have been proving quite the hit for some time on paved paths in gardens. Now, the classically elegant outdoor lights are becoming that much more versatile: The FACADO SOCKET contains two electrical outlet points, serving as a practical power distributor in gardens, on patios or on paths. The lamps can also be changed thanks to the E27 base and adapted to the desired lighting atmosphere. The FACADO SOCKET is available in two heights [65 and 100 cm].

IP54

FACADO SOCKET

- **Total load: max. 3,680 W**
- **Outlets and light can be switched on separately**
- **Feed-through wiring possible**
- **Replaceable lamp [E27]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Max. Power	1x max. 20 W
Width	108 mm	Connected Load max.	3680 W
Height	108 mm	Rated Input Voltage	220-240 V/AC

Article	Housing Color	Length	Price
733064	Dark grey	650 mm	**€ 159.95**
733065	Dark grey	1000 mm	**€ 175.95**

E27 IP54

Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68 **€ 1.75**

LERNA

LERNA series power distributors offer a number of advantages. With two sockets and a total load of 3,680 W, they allow you to connect various devices while providing reliable lighting. Light and sockets can be switched separately (separate L+N). The socket cover latches open for additional convenience. The ability to adjust the light colour in two stages (3,000 K/4,000 K) allows you to choose the colour temperature that sets the perfect ambience. The downward orientation of the lighting also fully guarantees efficient illumination without creating light pollution. LERNA series bollard lights are available in two different sizes (600 mm and 1,000 mm). With a output of 7,4 W and 256 lm, the light itself is incredibly bright.

page 430

CCT IK06 IP65 on off SDCM<3

LERNA

- **Socket cover latches open**
- **Total socket output: 3,680 W**
- **Light colour adjustable in two stages**
- **Light and socket can be switched separately (separate L+N)**
- **Light directed fully downwards to prevent light pollution**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Luminous Flux	237/256 lm	Light Beam Angle	50 Degree
Length	120 mm	Light Beam Angle 2	100 Degree
Width	100 mm	CRI (Ra)	80
Power	7.4 W	IK Protection Class	IK06
Connected Load max.	3680 W		



733071

Article	Housing Color		Height	Price
733071	Dark grey	WW NW	600 mm	**€ 215.95**
733070	Dark grey	WW NW	1000 mm	**€ 247.95**

IP65

Accessories
931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68 **€ 1.75**

surface mounted / ground spike

page 508

page 511

page 512

page 513

page 514

page 515

page 516

DEKO-LIGHT RF-SMART SPOTLIGHT RGB+CCT RF + ZIGBEE

The RF-Smart SPOT spotlight with ground spike offers dimmable brightness and colour saturation, 16 million colours and adjustable colour temperatures. This spotlight has eight pre-installed automatic programs and the ability to synchronise with other RF-Smart components, offering maximum flexibility. Can be controlled using RF-smart wireless remote controls (2.4 GHz, range approx. 30 m, not in scope of delivery) as well as all Zigbee 3.0 compatible controllers and apps such as Amazon Echo (Alexa), Google Assistant and Tuya (appropriate gateway required). The very narrow beam angle makes it ideal for column lighting and similar applications.

NEW · IP65 · RF-smart · RGB+CCT · zigbee

DEKO-LIGHT RF-SMART SPOTLIGHT RGB+CCT RF + ZIGBEE

- **Adjustable brightness and colour saturation**
- **843539: RGB 3 x 3 W [max. 9 W], CW / WW 2 x 9 W [max. 9 W], max. total output 9 W**
- **843521: RGB 3 x 10 W [max. 25 W], CW / WW 2 x 25 W [max. 25 W], max. total output 25 W**
- **16 million available colours and adjustable colour temperature**
- **18 automatic programmes pre-installed**
- **Program and remote control synchronisation when operating multiple RF smart components (repeater function)**
- **Can be controlled with RF smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo (Alexa), Google Assistant, Tuya (relevant gateway required, outdoor range up to 100 m)**
- **Very narrow light emission angle, perfect for column lighting or similar**

Application Area
Object lighting / architecture, Garage / carport / car park

Housing	Aluminium, Plastic	Control	RF-Smart, ZigBee 3.0
Colour Temperature	2700-6500 K	Primary Cable Length	1.5 m
Rated Input Voltage	100-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	Light Direction	Front
Light Beam Angle	15 Degree	IP Protection Type Plug	IP 44
Swivelling Angle	355 Degree		


843521

Article	Housing Color		Luminous Flux	Length	Width	Height	Power	Price
843539	Anthracite	RGB WW CW	900 lm	72 mm	131 mm	135 mm	9.0 W	**€ 111.95**
843521	Anthracite	RGB WW CW	2200 lm	65 mm	170 mm	180 mm	25.0 W	**€ 191.95**

IP65 · 5 CH · A↑G F

Accessories for **843521**

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 55.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 87.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 59.95**
930659	Wall bracket/display arm, metal, black, length: 800 mm	**€ 47.95**

Loxone Lichtinstallation
Eurotec-Ibiza | © fotoeichbaum

NEW | IP65 | RF-smart | RGB+CCT | zigbee

DEKO-LIGHT, RF-SMART WIDE-SPOT, RGB+CCT RF + ZIGBEE

- **Brightness and colour saturation are dimmable**
- **RGB 3 x 3 W (max. 9 W), CW / WW 2 x 12 W (max. 12 W), max. total power 12 W**
- **16 million colours and adjustable colour temperature**
- **18 pre-installed automatic programmes**
- **Programme and remote control synchronisation when operating multiple RF-Smart components (repeater function)**
- **Controllable with RF-Smart wireless remote controls (not included)**
- **Controllable via all Zigbee 3.0-compatible controllers / apps (gateway required)**
- **Wide-spot, ideal for even and wide-area lighting**

Housing	Aluminium, Plastic	Power Supply Unit incl.	Yes
Colour Temperature	2700-6500 K	Light Beam Angle	60 Degree
Luminous Flux	1100 lm	Swivelling Angle	355 Degree
Length	70 mm	Control	RF-Smart, ZigBee 3.0
Width	80 mm	Primary Cable Length	1 m
Height	170 mm	CRI (Ra)	80
Power	12 W	Light Direction	Front
Rated Input Voltage	100-240 V/AC	IP Protection Type Plug	IP 44

Article	Housing Color	Colour Temperature	Price
843540	Anthracite	RGB WW CW 2700-6500 K	**€ 135.95**

IP65 | 5 CH | A ↑ G F

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

IK05 IP65

SPIKY

- **Replaceable GU10 lamp (retrofit)**
- **Incl. 2 m connecting cable with IP44 plug**
- **Incl. ground spike**
- **Incl. Glare-reducing cover (art. no. 732161 only)**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Plastic	Control	Dimmable via optional light source
Surface	Matt	Swivelling Angle	180 Degree
Max. Power	1x max. 35 W	IP Protection Type Plug	IP 44
Rated Input Voltage	220-240 V/AC		
Primary Connection End	Power plug		

Article	Housing Color	Height	Ø	Primary Cable Length	Price
732161	Black	345 mm	100 mm	2.5 m	**€ 27.95**
732160	Dark grey	420 mm	60 mm	2 m	**€ 31.95**

GU10 IP65

Accessories

843532	RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree	**€ 37.95**
843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 55.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 59.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 87.95**

IP65

KEID

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	45 Degree
Length	120 mm	Swivelling Angle	180 Degree
Height	457 mm	Primary Cable Length	0.5 m
Ø	75 mm	Primary Connection End	Connection box IP65
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80



732094

Article	Housing Color		Luminous Flux	Power	Price
732094	Dark grey	WW	800 lm	10.3 W	**€ 111.95**
732095	Dark grey	WW	1350 lm	21.5 W	**€ 119.95**



IP65

COLT 8 W COB + 8 W RGBW

- **Replaceable reflectors**
- **Including clear/frosted glass pane**
- **Including honeycomb filter**
- **Feed-through wiring possible**

Application Area
Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Base Height	50 mm
Colour Temperature	3000 K	Swivelling Angle	180 Degree



732108

Article	Housing Color		Luminous Flux	Height	Ø	Base Ø	Power	Price
732127	Dark grey	RGB WW	340 lm	66 mm	78 mm	96 mm	8.6 W	**€ 239.95**
732108	Dark grey	WW	470 lm	65 mm	77 mm	95 mm	7.0 W	**€ 159.95**

IP65 A↑G G

Accessories

930441	Surface-mounted housing for Colt 8 W series, black		**€ 47.95**
930426	Ground spike for Colt series 4/8 W, M5, black		**€ 7.95**

Accessories for **732108**

930431	12° reflector for Colt 8 W series		**€ 6.95**
930432	22° reflector for Colt 8 W series		**€ 6.95**
930587	Connecting cable with 230 V power plug		**€ 15.95**

Accessories for **732127**

862122	FLAT, CV, UT 24 V/50 W		**€ 41.95**
862230	OCTO, CV, Mini 24 V/12 W		**€ 17.95**
872083	IP, CV, V6-40-24		**€ 59.95**

IP65

COLT 15 W COB + 16 W RGBW

- **Replaceable reflectors**
- **Including clear/frosted glass pane**
- **Including honeycomb filter**
- **Feed-through wiring possible**

Application Area
Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Base Height	56 mm
Colour Temperature	3000 K	Base Ø	120 mm
Height	88 mm	Swivelling Angle	180 Degree
Ø	111 mm		



732109

Article	Housing Color		Luminous Flux	Power	Rated Input Voltage	Rated Input Voltage	Power Supply incl.	Price
732128	Dark grey	RGB WW	780 lm	16.0 W	24 V/DC		No	**€ 359.95**
732109	Dark grey	WW	1090 lm	14.0 W		220-240 V/AC	Yes	**€ 199.95**



Accessories

930442	Surface-mounted housing for Colt 15/30 W series, black		**€ 55.95**
930427	Ground spike for Colt series 15/25/30/36/65 W, M10, black		**€ 9.95**

Accessories for **732109**

930434	12° reflector for Colt 15 W series		**€ 8.95**
930435	22° reflector for Colt 15 W series		**€ 9.95**
930587	Connecting cable with 230 V power plug		**€ 15.95**

Accessories for **732128**

862122	FLAT, CV, UT 24 V/50 W		**€ 41.95**
862164	BASIC, CV, Q8H-24-75 W		**€ 59.95**
872083	IP, CV, V6-40-24		**€ 59.95**
872085	IP, CV, V6-75-24		**€ 75.95**
930426	Ground spike for Colt series 4/8 W, M5, black		**€ 7.95**

IP65

COLT 30 W COB + 25 W RGBW

- **Replaceable reflectors**
- **Including clear/frosted glass pane**
- **Including honeycomb filter**
- **Feed-through wiring possible**

Application Area
Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Base Height	56 mm
Colour Temperature	3000 K	Base Ø	120 mm
Height	112 mm	Swivelling Angle	180 Degree
Ø	131 mm		



732110

Article	Housing Color		Luminous Flux	Power	Rated Input Voltage	Rated Input Voltage	Power Supply incl.	Price
732129	Dark grey	RGB WW	1140 lm	25.0 W	24 V/DC		No	**€ 399.95**
732110	Dark grey	WW	2320 lm	29.0 W		220-240 V/AC	Yes	**€ 231.95**

IP65 A↑G G

Accessories

930442	Surface-mounted housing for Colt 15/30 W series, black		**€ 55.95**
930427	Ground spike for Colt series 15/25/30/36/65 W, M10, black		**€ 9.95**

Accessories for **732110**

930437	12° reflector for Colt 30 W series		**€ 9.95**
930438	22° reflector for Colt 30 W series		**€ 9.95**
930587	Connecting cable with 230 V power plug		**€ 15.95**

Accessories for **732129**

862163	BASIC, CV, Q8H-24-40 W		**€ 37.95**
862164	BASIC, CV, Q8H-24-75 W		**€ 59.95**
872083	IP, CV, V6-40-24		**€ 59.95**
872085	IP, CV, V6-75-24		**€ 75.95**
872094	IP, CV, V6-100-24		**€ 91.95**

page 520

page 521

wall washer

IP65 RGBWW

WALLWASHER CAPH 24 V

- **Including 0.5 m connecting cable with WEIPU plug**
- **Including 0.5 m connecting cable with WEIPU plug**

Application Area
Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Advertising lighting

Housing	Aluminium	Power Supply Unit incl.	No
Colour Temperature	3000 K	Control	Dimmable via optional controller
Length	1000 mm	Primary Cable Length	0.5 m
Width	53.36 mm	Primary Connection End	WEIPU plug 5-pole
Height	81.07 mm	CRI (Ra)	80
Power	60 W		
Rated Input Voltage	24 V/DC		



732071

Article	Housing Color		Luminous Flux	Light Beam Angle	Light Beam Angle 2	Light Distribution	Price
732072	Dark grey	RGB WW	2480 lm	40 Degree	15 Degree	Asymetric	**€ 332.95**
732071	Dark grey	RGB WW	2800 lm	25 Degree		Symmetric	**€ 332.95**

CV | IP65 | 4 CH | A ↑ G | G

Accessories

862164	BASIC, CV, Q8H-24-75 W		**€ 59.95**
872085	IP, CV, V6-75-24		**€ 75.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 79.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

IP65

WALLWASHER CAPH 230V

- **Including 2 m connecting cable with IP44 shaped plug**

Application Area
Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Advertising lighting

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Length	1000 mm	Primary Cable Length	2 m
Width	53.36 mm	Primary Connection End	Power plug IP44
Height	81.07 mm	CRI (Ra)	80
Power	38 W	IP Protection Type Plug	IP 44



732080

Article	Housing Color		Luminous Flux	Light Beam Angle	Light Beam Angle 2	Light Distribution	Price
732080	Dark grey	WW	2580 lm	40 Degree	15 Degree	Asymetric	**€ 332.95**
732079	Dark grey	WW	3000 lm	25 Degree		Symmetric	**€ 332.95**

IP65 A ↑ G G

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

ground recessed lights

page 524

page 524

page 525

page 526

page 526

page 528

page 529

page 530

page 531

page 532

page 533

page 534

page 535

page 537

page 537

IP67

ATON

Application Area
Garden / Terrace / Balcony / Walkways

Height	111 mm	Cut Out Ø	70 mm
Installation Depth	148 mm	Control	Dimmable via optional light source
Max. Power	1x max. 7 W		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Housing	Length	Width	Ø	IK Protection Class	Price
730474	Silver	Stainless steel			97 mm	IK08	**€ 45.95**
730475	Silver	Stainless steel / Aluminium	97 mm	97 mm			**€ 45.95**

GU10 IP67

IP67

PAVO

·Swivelling insert

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Rated Input Voltage	220-240 V/AC
		Cut Out Ø	100 mm
Height	156 mm	Control	Dimmable via optional light source
Installation Depth	193 mm		
Max. Power	1x max. 9 W	Swivelling Angle	25 Degree

Article	Housing Color	Length	Width	Ø	Price
730478	Silver			160 mm	**€ 91.95**
730479	Silver	160 mm	160 mm		**€ 91.95**

GU10 IP67

IK08 IP67 SDCM<5

PEACOCK

- **Including 0.5 m connecting cable with protected connection socket**

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	150 lm
Height	43 mm
Ø	58 mm
Power	2 W
Rated Input Voltage	220-240 V/AC

Power Supply Unit incl.	Yes
Installation Depth	48 mm
Light Beam Angle	30 Degree
Cut Out Ø	44 mm
CRI (Ra)	80
Primary Connection End	Connection box IP67
IK Protection Class	IK08
Light Distribution	Symmetric



730459

Article	Housing Color		Price
730459	Silver	WW	**€ 91.95**

IP67 A↑G G

IP67

FLAT 230V 20 DEGREE

·Including 0.5 m connecting cable

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	20 Degree
CRI (Ra)	80
Primary Cable Length	0.5 m
Primary Connection End	Connection box
Light Distribution	Symmetric



100111

Article	Housing Color		Luminous Flux	Height	Ø	Power	Installation Depth	Price
100111	Silver	WW	400 lm	44 mm	116 mm	5.8 W	44 mm	**€ 155.95**
100114	Silver	WW	860 lm	42 mm	173 mm	12.2 W	42 mm	**€ 223.95**

IP67 A ↑ G G

IP67

FLAT 230V 120 DEGREE

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	40 lm
Height	42 mm
Ø	116 mm
Power	1.3 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Installation Depth	43 mm
Light Beam Angle	120 Degree
Cut Out Ø	100 mm
CRI (Ra)	65
Primary Cable Length	0.5 m
Primary Connection End	Connection box
Light Distribution	Symmetric

Article	Housing Color		Price
730336	Silver	WW	**€ 123.95**

IP67

IK10 IP67 UGR<19





HELIOS

- **Incl. four heavy-duty anchors**

Application Area
Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Park / public outdoor area, Stairs / steps, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	90 Degree
Height	54 mm	CRI (Ra)	80
Ø	210 mm	IK Protection Class	IK10
Rated Input Voltage	220-240 V/AC		

Article	Housing Color		Luminous Flux	Power	Price
732143	Dark grey	WW	60 lm	4.0 W	**€ 95.95**
732049	Dark grey	WW	120 lm	4.0 W	**€ 95.95**
732050	Dark grey	WW	180 lm	6.0 W	**€ 95.95**

IP67

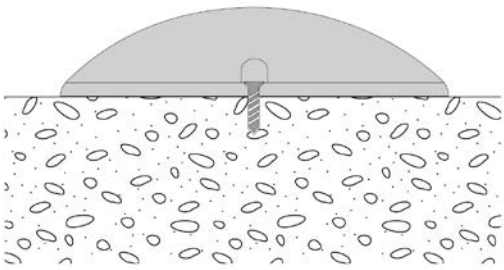
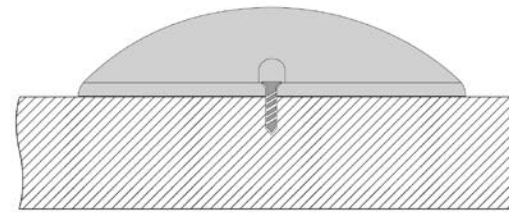

IP67 SDCM<5

SOFT FLEX

- **Adjustable light emission angle**
- **Including 1 m connecting cable**
- **Including honeycomb filter**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Swivelling Angle	60 Degree
Colour Temperature	3000 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Primary Cable Length	1 m
Power Supply Unit incl.	Yes	Primary Connection End	Connection box
Installation Depth	220 mm	Light Distribution	Symmetric


730266

Article	Housing Color		Luminous Flux	Height	Ø	Power	Light Beam Angle	Price
730267	Silver	WW	480 lm	128 mm	173 mm	9.3 W	15 Degree	**€ 287.95**
730266	Silver	WW	770 lm	190 mm	250 mm	18.4 W	25 Degree	**€ 479.95**

IP67 A↑G G

IP67 SDCM<5

CANUM 24V SYMMETRICAL

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	370 lm
Height	102 mm
Ø	116 mm
Power	5.8 W
Rated Input Voltage	24 V/DC
Power Supply Unit incl.	No

Installation Depth	150 mm
Light Beam Angle	45 Degree
Cut Out Ø	102 mm
Control	Dimmable via optional controller
CRI (Ra)	80
Primary Cable Length	2 m
Primary Connection End	WEIPU plug 2-pole
Light Distribution	Symmetric



100133

Article	Housing Color		Price
100133	Silver	WW	**€ 156.95**

CV | IP67 | III | A ↑ G | G

Accessories

862230	OCTO, CV, Mini 24 V/12 W	**€ 17.95**
872083	IP, CV, V6-40-24	**€ 59.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control	**€ 79.95**

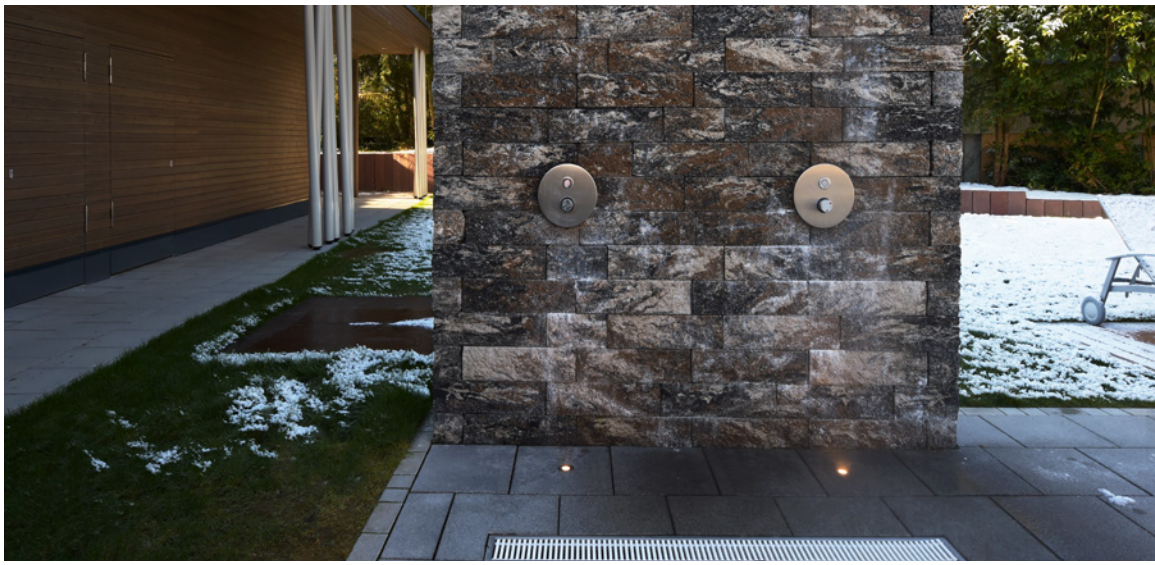

IP67

CANUM 24V ASYMMETRICAL

- **Including 0.5 m connecting cable with WEIPU plug**
- **Asymmetrical**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	800 lm
Height	111 mm
Ø	173 mm
Power	14 W
Rated Input Voltage	24 V/DC
Power Supply Unit incl.	No
Installation Depth	153 mm

Light Beam Angle	45 Degree
Light Beam Angle 2	35 Degree
Cut Out Ø	157 mm
Control	Dimmable via optional controller
CRI (Ra)	80
Primary Cable Length	0.5 m
Primary Connection End	WEIPU plug 2-pole
Light Distribution	Asymetric



730296

Article	Housing Color		Price
730296	Silver	WW	**€ 215.95**

CV | IP67 | III | A ↑ G | G

Accessories

872083	IP, CV, V6-40-24		**€ 59.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 79.95**

IP67 RGB

CANUM RGB 24V SYMMETRICAL

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	150 mm
Luminous Flux	370 lm	Light Beam Angle	30 Degree
Height	102 mm	Cut Out Ø	102 mm
Ø	116 mm	Control	Dimmable via optional controller
Power	7.4 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 4-pole
Power Supply Unit incl.	No	Light Distribution	Symmetric



730276

Article	Housing Color	Price
730276	Silver RGB	**€ 175.95**

CV IP67 3 CH

Accessories

872083	IP, CV, V6-40-24	**€ 59.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 79.95**

IK07 IP67 RGB

CANUM RGB 24V ASYMMETRICAL

- **Including 0.5 m connecting cable with WEIPU plug**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Light Beam Angle	50 Degree
Luminous Flux	650 lm	Light Beam Angle 2	35 Degree
Height	111 mm	Cut Out Ø	157 mm
Ø	173 mm	Control	Dimmable via optional controller
Power	16.9 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 4-pole
Power Supply Unit incl.	No	IK Protection Class	IK07
Installation Depth	153 mm	Light Distribution	Asymetric



730454

Article	Housing Color	Price
730454	Silver RGB	**€ 287.95**

CV IP67

Accessories

872083	IP, CV, V6-40-24		**€ 59.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 79.95**

IP67 SDCM<5

CANUM 230V SYMMETRICAL

- **Including connecting cable**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	280 lm
Height	102 mm
Ø	116 mm
Power	4.1 W
Rated Input Voltage	220-240 V/AC

Power Supply Unit incl.	Yes
Installation Depth	150 mm
Light Beam Angle	30 Degree
Cut Out Ø	102 mm
CRI (Ra)	80
Primary Cable Length	0.5 m
Primary Connection End	Connection box
Light Distribution	Symmetric



730255

Article	Housing Color		Price
730255	Silver	WW	**€ 143.95**

IP67 A↑G G

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

IK09 IP67

CANUM 230V ASYMMETRICAL

- **Asymmetrical**
- **Including 0.5 m connecting cable**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	700 lm
Height	111 mm
Ø	173 mm
Power	11.9 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes

Installation Depth	153 mm
Light Beam Angle	45 Degree
Light Beam Angle 2	35 Degree
Cut Out Ø	157 mm
CRI (Ra)	80
Primary Cable Length	0.5 m
Primary Connection End	Connection box
IK Protection Class	IK09
Light Distribution	Asymetric



730289

Article	Housing Color		Price
730289	Silver	WW	**€ 215.95**

IP67 A↑G G

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

Weingut
Vinothek
Information
****
Ferienwohnungen
Anmeldung / Reception
P
Gäste
Guests

IK07 IP67

LINE

- **Incl. connecting cable**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Light Beam Angle	20 Degree
Colour Temperature	3000 K	Cut Out Width	68 mm
Width	68 mm	CRI (Ra)	80
Height	31.5 mm	Primary Cable Length	0.5 m
Rated Input Voltage	220-240 V/AC	Primary Connection End	Connection box
Power Supply Unit incl.	Yes	IK Protection Class	IK07
Installation Depth	80 mm	Light Distribution	Symmetric



730432

Article	Housing Color		Luminous Flux	Length	Power	Cut Out Length	Cutout L x W	Price
730434	Silver	WW	1100 lm	549 mm	18.0 W	527 mm	527 x 68 mm	**€ 319.95**
730432	Silver	WW	2300 lm	1025 mm	36.0 W	1007 mm	1007 x 68 mm	**€ 509.95**

IP67 | 1 CH | A ↑ G | G

IP67 SDCM<5

LINE ASYMMETRICAL

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	90 mm
Colour Temperature	3000 K	Light Beam Angle	45 Degree
Width	63 mm	Light Beam Angle 2	35 Degree
Height	65 mm	Cut Out Width	58 mm
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	Primary Connection End	Connection box
		Light Distribution	Asymetric



730262

Article	Housing Color		Luminous Flux	Length	Power	Cut Out Length	Cutout L x W	Price
730292	Silver	WW	340 lm	195 mm	5.5 W	180 mm	180 x 58 mm	**€ 148.95**
730262	Silver	WW	730 lm	328 mm	11.9 W	313 mm	313 x 58 mm	**€ 207.95**

IP67 | A ↑ G | G

floodlight

page 540

page 541

IP65 RF-smart RGB+CCT zigbee

DEKO-LIGHT RF-SMART FLOODLIGHT RGB+CCT RF + ZIGBEE

- **Adjustable brightness and colour saturation**
- **16 million available colours and adjustable colour temperature**
- **18 automatic programmes pre-installed**
- **Program and remote control synchronisation when operating multiple RF smart components (repeater function)**
- **Can be controlled with RF smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo (Alexa), Google Assistant, Tuya (relevant gateway required, outdoor range up to 100 m)**

Application Area
Object lighting / architecture, Garage / carport / car park

Housing	Aluminium, Plastic	Control	RF-Smart, ZigBee 3.0
Colour Temperature	2700-6500 K	Primary Cable Length	1.5 m
Rated Input Voltage	100-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	Light Direction	Front
Light Beam Angle	160 Degree	IP Protection Type Plug	IP 44
Swivelling Angle	345 Degree		



843518

Article	Housing Color		Luminous Flux	Length	Width	Height	Power	Price
843518	Anthracite	RGB WW CW	3300 lm	40 mm	167 mm	227 mm	30.0 W	**€ 199.95**
843519	Anthracite	RGB WW CW	4800 lm	48 mm	220 mm	311 mm	50.0 W	**€ 279.95**
843520	Anthracite	RGB WW CW	10000 lm	60 mm	295 mm	403 mm	100.0 W	**€ 439.95**

IP65 5 CH A↑G E

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 55.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 59.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 87.95**
930659	Wall bracket/display arm, metal, black, length: 800 mm	**€ 47.95**

IK08 IP65

ATIK

- **IEC62662 - Protection against mechanical effects (IK Code)**
- **EN60598-2-24 - Lights for use in explosive gas and dust atmosphere (D designation)**
- **Including 2 m connecting cable with IP44 plug**

Application Area
Garage / carport / car park, Industry / production / high-bay warehouse

Housing	Aluminium	Swivelling Angle	180 Degree
Colour Temperature	4000 K	Primary Cable Length	2 m
Length	319 mm	Primary Connection End	Power plug IP44
Width	90 mm	CRI (Ra)	80
Height	411 mm	IP Protection Type Plug	IP 44
Power Supply Unit incl.	Yes	IK Protection Class	IK08
Light Beam Angle	110 Degree		


732102

Article	Housing Color		Luminous Flux	Power	Rated Input Voltage	EEI	Price
732096	Black	NW	21350 lm	152.0 W	220-240 V/AC	D	**€ 351.95**
732097	Black	NW	28450 lm	202.0 W	220-240 V/AC	D	**€ 443.95**
732098	Black	NW	31800 lm	242.0 W	220-240 V/AC	D	**€ 499.95**
732102	Black	NW	39900 lm	302.0 W	100-240 V/AC	E	**€ 559.95**

IP65

page 544

display lights

ATIS

When it comes to illuminating signs, façades, billboards or images, display lights are the perfect choice. They are easy to install, exceptionally efficient and suit almost any environment thanks to their timeless design. With corresponding IP protection, they can also be used outdoors, purposefully providing an additional lighting source in such environments.

IP65

ATIS

- **rotatable and swivelling lamp head**

Application Area
Object lighting / architecture, Advertising lighting

Housing	Aluminium
Colour Temperature	3000 K
Luminous Flux	1150 lm
Length	526 mm
Width	144 mm
Base Length	95 mm
Base Height	40 mm
Power	15 W

Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	100 Degree
Swivelling Angle	90 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	80



688020

Article	Housing Color		Price
688020	White	WW	**€ 183.95**
688021	Black	WW	**€ 183.95**

IP65

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

SYSTEM LAUTARO

548 Overview ring lights
550 pendant lights
558 surface mounted ceiling lights

System Lautaro

page 554

page 555

page 556

page 557

page 558

LAUTARO

LAUTARO is a new luminaire series which, despite its enormous configuration options, has one thing in common has one thing in common: it is round or ring-shaped and has a surrounding LED ring. But that However, this is where the similarities end. All other product features can be selected, which is why LAUTARO is suitable for a wide range of commercial [and private] applications, including cafés, hotel lobbies, schools, stores and much more.

Is your desired variant not included in the standard range? Then simply configure your customised LAUTARO using our online configurator.

Note: Please note that the LAUTARO series are project items that are not available from stock. The delivery time is approx. 6 weeks.

PLEASANT LIGHT ALL ROUND - YOUR BENEFITS AT A GLANCE:

- BEG-eligible [for approx. 50% of models]
- DALI dimmable thanks to integrated power supply unit
- emergency current capable
- through-wiring for simple series connection
- tool-free connection with spring terminals
- easy to install and maintain thanks to durable, easily replaceable components
- invisible screw connection for a clean appearance

1,080 VARIANTS AS STANDARD - SPECIAL DESIGNS ON REQUEST MODULAR SYSTEM FOR MAXIMUM DESIGN FREEDOM:

- three profile sizes: 60×44 / 80×55 / 100×80 mm
- three colours: RAL 9005 [black] / RAL 9006 [silver] / RAL 9016 [white]
- four diameters: 600 / 900 / 1,200 / 1,500 mm
- three light colors: 2,700 K / 3,000 K / 4,000 K
- surface-mounted luminaires for direct light
- pendant luminaires for direct or direct-indirect light [separately switchable and dimmable]
- custom-made products on request - e.g. individual sizes or RAL of your choice

1,080 GOOD REASONS

The LAUTARO surface-mounted and pendant light offers so many variants. But don't worry: the configuration is very simple! LAUTARO is a new luminaire series which, despite its enormous configuration options, has one thing in common: it is round or ring-shaped and has a uniform, all-round light emission. But that's where the similarities end. All other product features can be selected, making LAUTARO ideal for a wide range of commercial [and private] applications, including reception areas, restaurants, atriums, open-plan offices and much more.

DALI for all
All LAUTARO variants are equipped with an integrated DALI power supply unit and are dimmable. The power supply units are suitable for emergency power and facilitate installation thanks to integrated loop-in/loop-out technology.

All information on the LAUTARO series can be found from page 588.

Is your desired variant not included in the standard range? Then simply configure your customised LAUTARO using our online configurator.

6 STEPS TO A CUSTOMISED LAUTARO

1. **SELECT THE PRODUCT VARIANT**
   The LAUTARO is available as a surface-mounted or pendant luminaire - the latter with two types of suspension and direct or direct/indirect lighting.

2. **SELECT THE PROFILE**
   There is a choice of three different profiles [height x width in mm]: 60x44, 80x55 and 100x80.

3. **SELECT THE DIAMETER**
   In order to use the LAUTARO in different room sizes and applications, it is available in four diameters: 600, 900, 1,200 and 1,500 mm.

4. **SELECT THE HOUSING COLOUR**
   Black, grey, white - each in matt with a powder-coated surface. Individual RAL colours are available on special request.

5. **SELECT THE DIFFUSER**
   In addition to the opal diffuser, a microprismatic version is also available for for use in workplaces with particularly low glare [UGR<19].

6. **SELECT THE COLOUR TEMPERATURE**
   2,700K, 3,000K or 4,000K - incandescent lamp, warm white or neutral white. With these three colour temperatures, you can cover most lighting requirements.

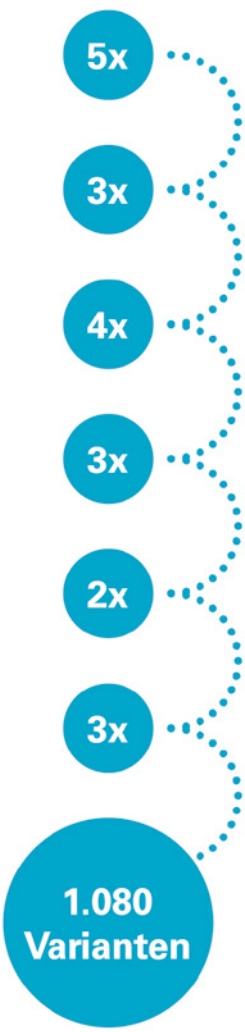

DALI IK05 Ra>90 SDCM<2

LAUTARO 900/60 DOWN, SUSPENSION CENTRE

- **DALI dimmable with integrated power supply**
- **continuous wiring possible**
- **tool-free connection with plug-in terminals**
- **easy to install / maintain**
- **long-lasting, easily replaceable components**
- **invisible screw connections**
- **customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Power Supply Unit incl.	Yes
Power	60 W	Light Beam Angle	90 Degree
Rated Input Voltage	198-264 V/AC	Control	DALI 2 / DT6, Push-Dim
Tread depth	60 mm		
Ø	900 mm	CRI (Ra)	90
Pendulum Length	3000 mm	IK Protection Class	IK05

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950216	Light grey	WW 2700 K	opal	6600 lm	**€ 951.95**
950217	Black	WW 2700 K	opal	6600 lm	**€ 951.95**
950218	White	WW 2700 K	opal	6600 lm	**€ 951.95**
950225	Light grey	WW 2700 K	microprismatic	7000 lm	**€ 975.95**
950226	Black	WW 2700 K	microprismatic	7000 lm	**€ 975.95**
950227	White	WW 2700 K	microprismatic	7000 lm	**€ 975.95**
950219	Light grey	WW 3000 K	opal	7000 lm	**€ 951.95**
950220	Black	WW 3000 K	opal	7000 lm	**€ 951.95**
950221	White	WW 3000 K	opal	7000 lm	**€ 951.95**
950228	Light grey	WW 3000 K	microprismatic	7500 lm	**€ 975.95**
950229	Black	WW 3000 K	microprismatic	7500 lm	**€ 975.95**
950230	White	WW 3000 K	microprismatic	7500 lm	**€ 975.95**
950222	Light grey	NW 4000 K	opal	7200 lm	**€ 951.95**
950223	Black	NW 4000 K	opal	7200 lm	**€ 951.95**
950224	White	NW 4000 K	opal	7200 lm	**€ 951.95**
950231	Light grey	NW 4000 K	microprismatic	8100 lm	**€ 975.95**
950232	Black	NW 4000 K	microprismatic	8100 lm	**€ 975.95**
950233	White	NW 4000 K	microprismatic	8100 lm	**€ 975.95**

IP40

DALI IK05 Ra>90 SDCM<2

LAUTARO 900/60 DOWN, SUSPENSION PARALLEL

- **DALI dimmable with integrated power supply**
- **continuous wiring possible**
- **tool-free connection with plug-in terminals**
- **easy to install / maintain**
- **long-lasting, easily replaceable components**
- **invisible screw connections**
- **customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Power Supply Unit incl.	Yes
Power	60 W	Light Beam Angle	90 Degree
Rated Input Voltage	198-264 V/AC	Control	DALI 2 / DT6, Push-Dim
Tread depth	60 mm		
Ø	900 mm	CRI (Ra)	90
Pendulum Length	3000 mm	IK Protection Class	IK05

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950234	Light grey	WW 2700 K	opal	6600 lm	**€ 951.95**
950235	Black	WW 2700 K	opal	6600 lm	**€ 951.95**
950236	White	WW 2700 K	opal	6600 lm	**€ 951.95**
950243	Light grey	WW 2700 K	microprismatic	7000 lm	**€ 975.95**
950244	Black	WW 2700 K	microprismatic	7000 lm	**€ 975.95**
950245	White	WW 2700 K	microprismatic	7000 lm	**€ 975.95**
950237	Light grey	WW 3000 K	opal	7000 lm	**€ 951.95**
950238	Black	WW 3000 K	opal	7000 lm	**€ 951.95**
950239	White	WW 3000 K	opal	7000 lm	**€ 951.95**
950246	Light grey	WW 3000 K	microprismatic	7500 lm	**€ 975.95**
950247	Black	WW 3000 K	microprismatic	7500 lm	**€ 975.95**
950248	White	WW 3000 K	microprismatic	7500 lm	**€ 975.95**
950240	Light grey	NW 4000 K	opal	7200 lm	**€ 951.95**
950241	Black	NW 4000 K	opal	7200 lm	**€ 951.95**
950242	White	NW 4000 K	opal	7200 lm	**€ 951.95**
950249	Light grey	NW 4000 K	microprismatic	8100 lm	**€ 975.95**
950250	Black	NW 4000 K	microprismatic	8100 lm	**€ 975.95**
950251	White	NW 4000 K	microprismatic	8100 lm	**€ 975.95**

IP40

DALI IK05 Ra>90 SDCM<2

LAUTARO 900/60 UP/DOWN, SUSPENSION CENTRE

- **DALI dimmable with integrated power supply**
- **continuous wiring possible**
- **tool-free connection with plug-in terminals**
- **easy to install / maintain**
- **long-lasting, easily replaceable components**
- **invisible screw connections**
- **customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Light Beam Angle	90 Degree
Rated Input Voltage	198-264 V/AC	Control	DALI 2 / DT6, Push-Dim
Tread depth	60 mm		
Ø	900 mm	CRI (Ra)	90
Pendulum Length	3000 mm	IK Protection Class	IK05
Power Supply Unit incl.	Yes		

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Power	Price
950252	Light grey	WW 2700 K	opal	9200 lm	89.0 W	**€ 1282.95**
950253	Black	WW 2700 K	opal	9200 lm	89.0 W	**€ 1282.95**
950254	White	WW 2700 K	opal	9200 lm	89.0 W	**€ 1282.95**
950261	Light grey	WW 2700 K	microprismatic	10000 lm	89.0 W	**€ 1267.95**
950262	Black	WW 2700 K	microprismatic	10000 lm	89.0 W	**€ 1267.95**
950263	White	WW 2700 K	microprismatic	10000 lm	89.0 W	**€ 1267.95**
950257	White	WW 3000 K	opal	9900 lm	85.0 W	**€ 1282.95**
950255	Light grey	WW 3000 K	opal	9900 lm	89.0 W	**€ 1282.95**
950256	Black	WW 3000 K	opal	9900 lm	89.0 W	**€ 1282.95**
950264	Light grey	WW 3000 K	microprismatic	10500 lm	89.0 W	**€ 1267.95**
950265	Black	WW 3000 K	microprismatic	10500 lm	89.0 W	**€ 1267.95**
950266	White	WW 3000 K	microprismatic	10500 lm	89.0 W	**€ 1267.95**
950258	Light grey	NW 4000 K	opal	10000 lm	89.0 W	**€ 1282.95**
950259	Black	NW 4000 K	opal	10000 lm	89.0 W	**€ 1282.95**
950260	White	NW 4000 K	opal	10000 lm	89.0 W	**€ 1282.95**
950267	Light grey	NW 4000 K	microprismatic	11500 lm	89.0 W	**€ 1267.95**
950268	Black	NW 4000 K	microprismatic	11500 lm	89.0 W	**€ 1267.95**
950269	White	NW 4000 K	microprismatic	11500 lm	89.0 W	**€ 1267.95**

IP40

DALI IK05 Ra>90 SDCM<2

LAUTARO 900/60 UP/DOWN, SUSPENSION PARALLEL

- **DALI dimmable with integrated power supply**
- **continuous wiring possible**
- **tool-free connection with plug-in terminals**
- **easy to install / maintain**
- **long-lasting, easily replaceable components**
- **invisible screw connections**
- **customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Power Supply Unit incl.	Yes
Power	89 W	Light Beam Angle	90 Degree
Rated Input Voltage	198-264 V/AC	Control	DALI 2 / DT6, Push-Dim
Tread depth	60 mm		
Ø	900 mm	CRI (Ra)	90
Pendulum Length	3000 mm	IK Protection Class	IK05

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950270	Light grey	WW 2700 K	opal	9200 lm	**€ 1282.95**
950271	Black	WW 2700 K	opal	9200 lm	**€ 1282.95**
950272	White	WW 2700 K	opal	9200 lm	**€ 1282.95**
950279	Light grey	WW 2700 K	microprismatic	10000 lm	**€ 1267.95**
950280	Black	WW 2700 K	microprismatic	10000 lm	**€ 1267.95**
950281	White	WW 2700 K	microprismatic	10000 lm	**€ 1267.95**
950273	Light grey	WW 3000 K	opal	9900 lm	**€ 1282.95**
950274	Black	WW 3000 K	opal	9900 lm	**€ 1282.95**
950275	White	WW 3000 K	opal	9900 lm	**€ 1282.95**
950282	Light grey	WW 3000 K	microprismatic	10500 lm	**€ 1267.95**
950283	Black	WW 3000 K	microprismatic	10500 lm	**€ 1267.95**
950284	White	WW 3000 K	microprismatic	10500 lm	**€ 1267.95**
950276	Light grey	NW 4000 K	opal	10000 lm	**€ 1282.95**
950277	Black	NW 4000 K	opal	10000 lm	**€ 1282.95**
950278	White	NW 4000 K	opal	10000 lm	**€ 1282.95**
950285	Light grey	NW 4000 K	microprismatic	11500 lm	**€ 1267.95**
950286	Black	NW 4000 K	microprismatic	11500 lm	**€ 1267.95**
950287	White	NW 4000 K	microprismatic	11500 lm	**€ 1267.95**

IP40

DALI IK05 Ra>90 SDCM<2

LAUTARO 900/60

- **DALI-dimmable with integrated power supply unit**
- **Through-wiring possible**
- **Tool-free connection with plug-in terminals**
- **Easy to install and maintain**
- **Durable, easily replaceable components**
- **Concealed screw connections**
- **Customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Light Beam Angle	90 Degree
Tread depth	60 mm	Control	DALI 2 / DT6, Push-Dim
Ø	900 mm		
Power	60 W	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK05
Power Supply Unit incl.	Yes		

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950918	Light grey	WW 2700 K	opal	6600 lm	**€ 799.95**
950919	Black	WW 2700 K	opal	6600 lm	**€ 799.95**
950920	White	WW 2700 K	opal	6600 lm	**€ 799.95**
950927	Light grey	WW 2700 K	microprismatic	7000 lm	**€ 883.95**
950928	Black	WW 2700 K	microprismatic	7000 lm	**€ 883.95**
950929	White	WW 2700 K	microprismatic	7000 lm	**€ 883.95**
950921	Light grey	WW 3000 K	opal	7000 lm	**€ 799.95**
950922	Black	WW 3000 K	opal	7000 lm	**€ 799.95**
950923	White	WW 3000 K	opal	7000 lm	**€ 799.95**
950930	Light grey	WW 3000 K	microprismatic	7500 lm	**€ 883.95**
950931	Black	WW 3000 K	microprismatic	7500 lm	**€ 883.95**
950932	White	WW 3000 K	microprismatic	7500 lm	**€ 883.95**
950924	Light grey	NW 4000 K	opal	7200 lm	**€ 799.95**
950925	Black	NW 4000 K	opal	7200 lm	**€ 799.95**
950926	White	NW 4000 K	opal	7200 lm	**€ 799.95**
950933	Light grey	NW 4000 K	microprismatic	8100 lm	**€ 883.95**
950934	Black	NW 4000 K	microprismatic	8100 lm	**€ 883.95**
950935	White	NW 4000 K	microprismatic	8100 lm	**€ 883.95**

IP40

SYSTEM PLANO

562 Overview PLANO luminaire system
564 luminaire system
580 Overview PLANO profiles
582 profile system

PLANO luminaire system

page 566



page 568

page 570

page 572

page 574

page 576

page 578

PLANO LUMINAIRE SYSTEM

Whether as a recessed version, surface-mounted ceiling luminaire or pendant luminaire as well as for wall mounting: the PLANO series is more than just another combination of profile and LED strip and is produced entirely in Europe.

The linear lighting solutions are based on four different profiles and can be configured individually. Thus, there are hardly any limits to the possible applications - whether in the office, in schools, in private living areas, in stores, showrooms and many more.

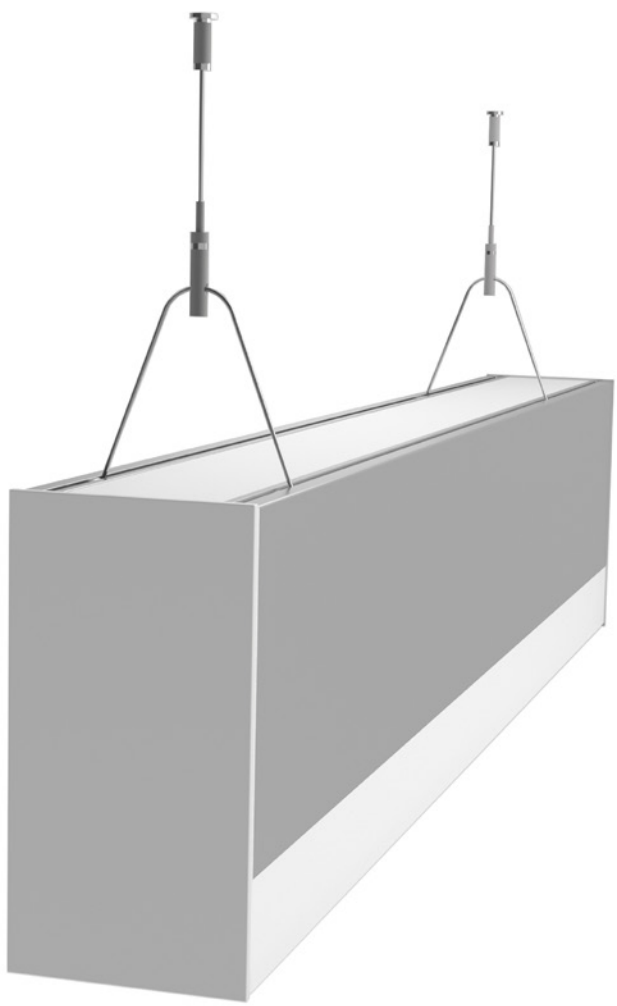

INDIVIDUAL SOLUTION

A PLANO profile luminaire always has the same design - and yet it is individual. Inside sits a profile with LED illumination in 2,700, 3,000 or 4,000 K. The surrounding luminaire body is made of extruded aluminum and has an anodized or powder-coated surface.
You can individually determine the length, equipment as well as the basic shape of the body, because the PLANO series is an individual lighting solution.

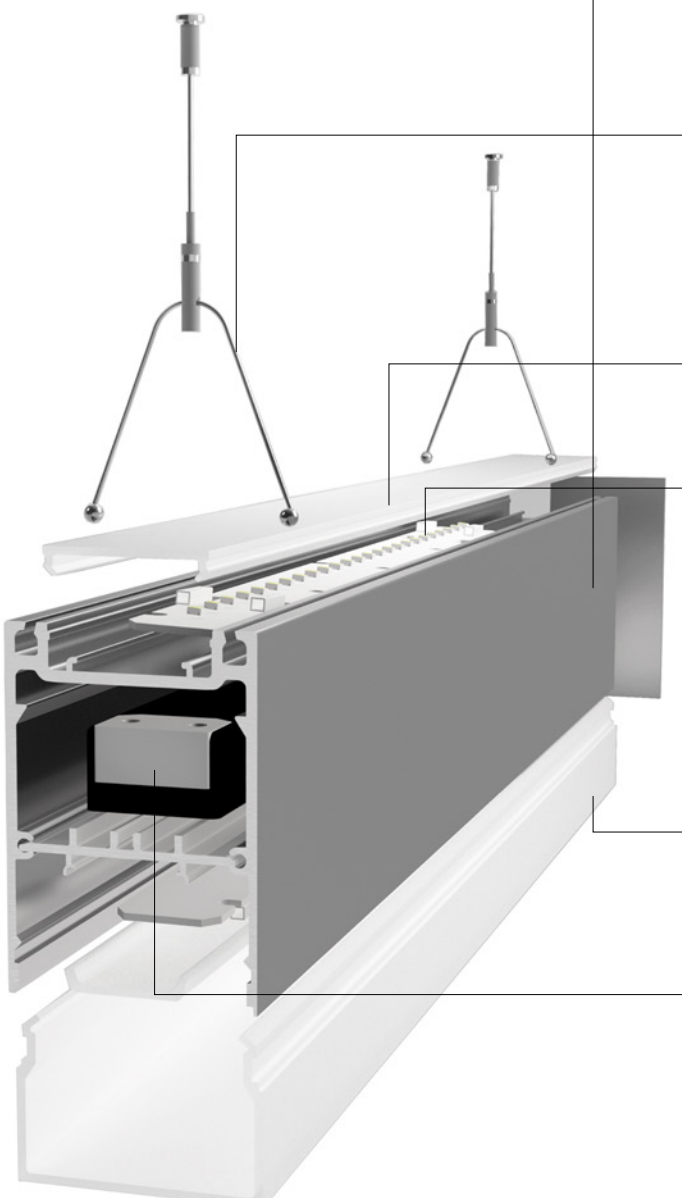

PROFIL
- colour
- length
- basic shape

ASSEMBLY
- installation
- built- in
- ceiling
- pendant
- wall

RADIATION DIRECTION
- up
- up / down

COLOUR TEMPERATURE
- 2700 K
- 3000 K
- 4000 K

COVER
- opal
- opal U
- microprismatic

CONTROL
- switchable
- DALI
- phase angle / section
- Casambi

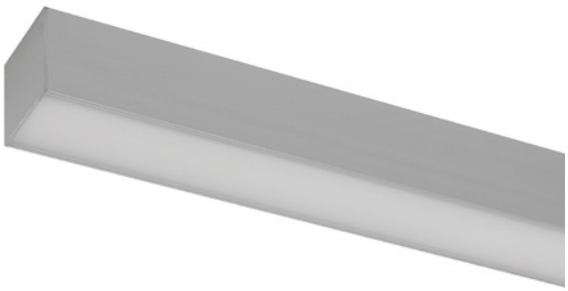

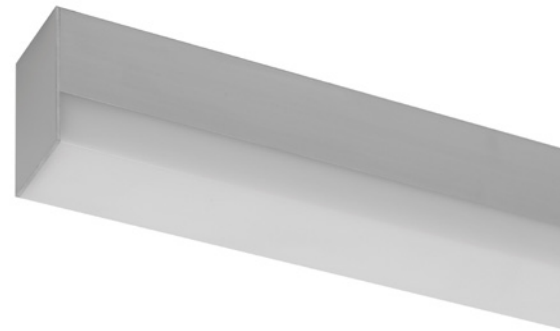

PLANO DS
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
x	x			x	x	x	x	x		x	x	x	x	x	x	x	x

LED | Ra>90 | IP20









CONFIGURATION EXAMPLE

- DS surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 6827 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

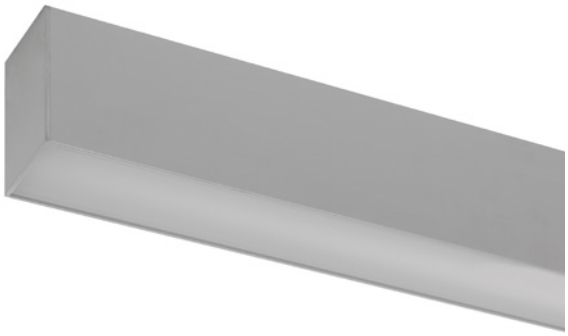

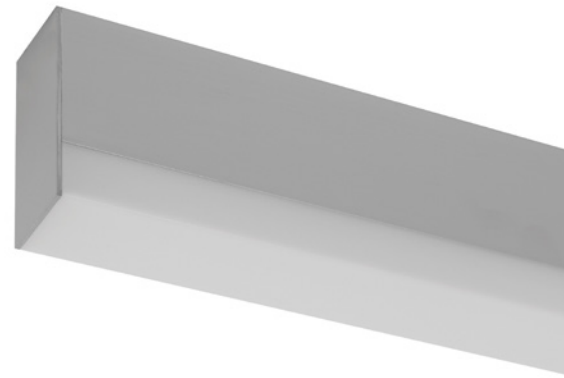

PLANO ES
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+downn	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
x	x			x	x	x	x	x	x	x	x	x	x	x	x	x	x

LED | Ra>90 | IP20





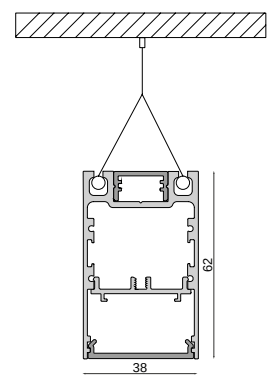

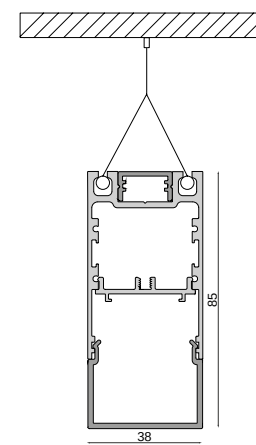

CONFIGURATION EXAMPLE

- ES surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 5425 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

PRADA

HUGO

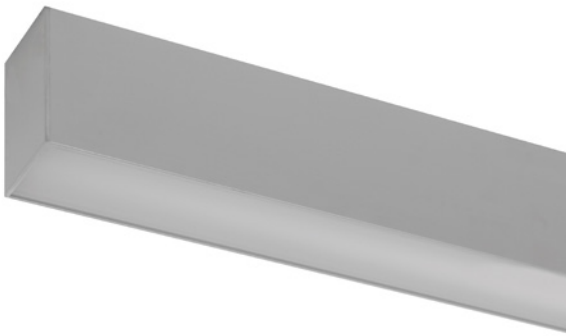

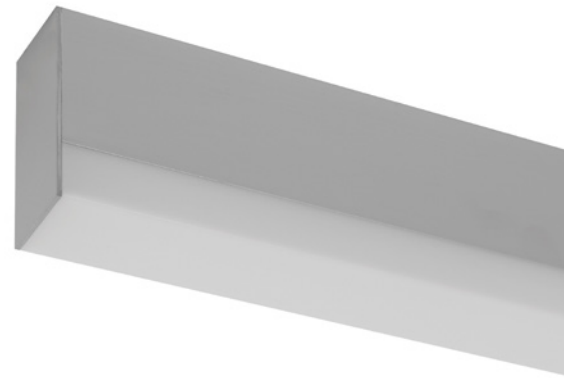

PLANO ES
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+downn	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
		x		x	x	x	x	x	x	x	x	x	x	x	x	x	x

LED | Ra>90 | IP20



CONFIGURATION EXAMPLE

- ES wall-mounted luminaire | 2400 mm | black
- 97 W
- 3000 K | 7201 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps and wall bracket

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

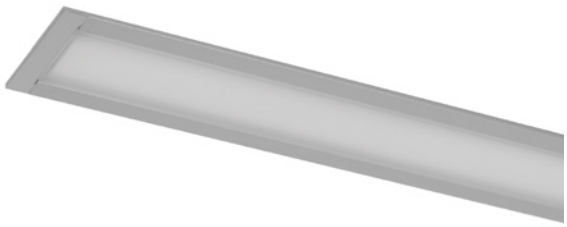

PLANO ES RECESSED LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
			x	x	x	x	x	x		x	x	x	x	x	x	x	x

LED | Ra>90 | IP20



CONFIGURATION EXAMPLE

- ES recessed ceiling luminaire | 2400 mm | black
- 97 W
- 3000 K | 7201 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps and mounting bracket

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

B

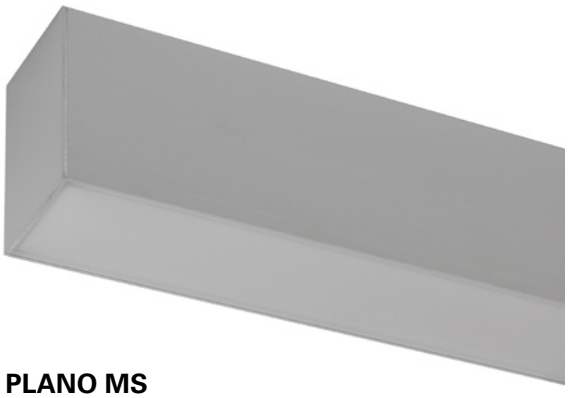

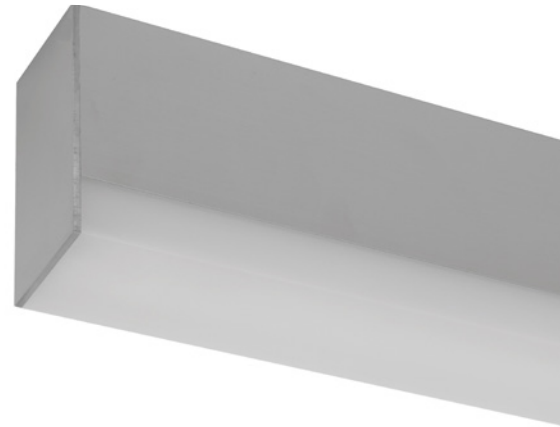

PLANO MS
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+downn	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
x	x			x	x	x	x	x	x	x	x	x	x	x	x	x	x

LED | Ra>90 | IP20



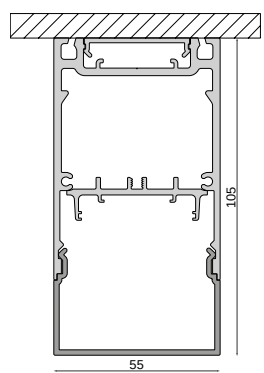

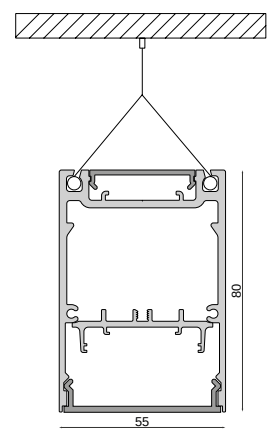

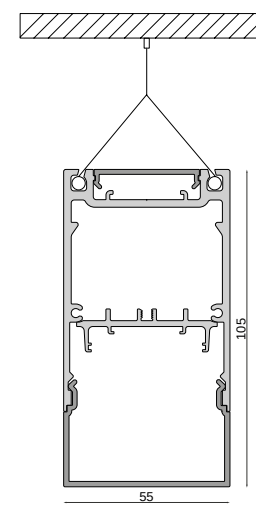

CONFIGURATION EXAMPLE

- MS surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 6990 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

PLANO MS RECESSED LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
			x	x	x	x	x	x		x	x	x	x	x	x	x	x

LED | Ra>90 | IP20

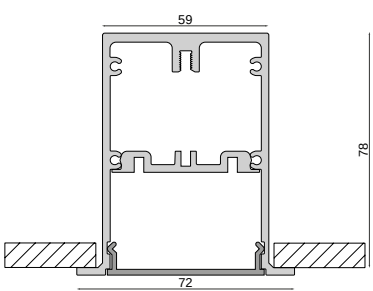

CONFIGURATION EXAMPLE

- MS recessed ceiling luminaire | 2400 mm | black
- 74 W
- 3000 K | 6990 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps and mounting bracket

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

PLANO BSH
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
		x		x	x	x	x	x	x	x	x	x	x	x	x	x	x

LED | Ra>90 | IP20





CONFIGURATION EXAMPLE

- BSH wall-mounted luminaire | 2400 mm | black
- 174 W,
- 3000 K | 10822 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

PLANO profiles

page 582

page 583



page 584

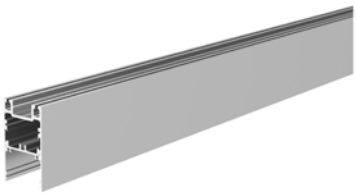

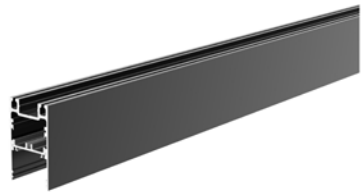



PROFILE PLANO ES

- **universal light profile**
- **Uplight for LED strips up to 15 mm wide**
- **Downlight for LED strips up to 22 mm wide**
- **incl. LED carrier**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970574	Black		2000 mm	**€ 103.95**
970576	White		2000 mm	**€ 151.95**
970575	Black		2500 mm	**€ 127.95**
970577	White		2500 mm	**€ 191.95**
970572	Aluminium	Anodised	2000 mm	**€ 103.95**
970573	Aluminium	Anodised	2500 mm	**€ 127.95**

Accessories

988111	Plano ES opal indirect cover, 2 m	**€ 19.95**
988112	Plano ES opal indirect cover, 2.5 m	**€ 23.95**
988201	PLANO ES longitudinal connector	**€ 7.95**
988204	PLANO ES corner connector	**€ 14.95**
988206	PLANO aluminium wall bracket	**€ 39.95**
988095	PLANO ES and MS - cable suspension set, in pairs	**€ 71.95**

Accessories for **970572**, **970573**

988092	PLANO ES end cap surface-mounted, aluminium anodised	**€ 19.95**
988114	PLANO ES end cap high surface-mounted, black	**€ 19.95**
988207	Plano ES and MS anodised aluminium uplight dummy cover	**€ 111.95**

Accessories for **970572**, **970574**, **970576**

988086	PLANO ES and BSH and MS flat opal uplight cover, 2 m	**€ 31.95**
988088	PLANO ES and BSH high opal cover, 2 m	**€ 67.95**
988090	PLANO ES and BSH and MS flat microprism uplight cover, 2 m	**€ 55.95**

Accessories for **970573**, **970575**, **970577**

988087	PLANO ES and BSH and MS flat opal uplight cover, 2.5 m	**€ 39.95**
988089	PLANO ES and BSH high opal cover, 2.5 m	**€ 83.95**
988091	PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m	**€ 67.95**

Accessories for **970574**, **970575**

988093	PLANO ES end cap surface-mounted, black	**€ 19.95**
988115	PLANO glued laminated timber end cap high surface-mounted, aluminium anodised	**€ 31.95**
988208	Plano ES and MS black uplight dummy cover	**€ 79.95**

Accessories for **970576**, **970577**

988094	PLANO ES end cap surface-mounted, white	**€ 23.95**
988209	Plano ES and MS white uplight dummy cover	**€ 79.95**





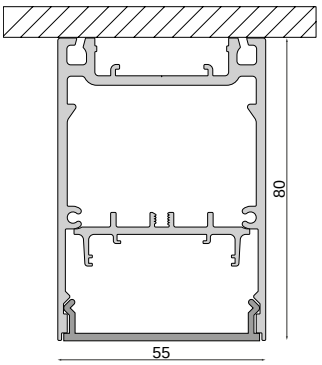

PROFILE PLANO MS

- **universal light profile**
- **Uplight for LED strips up to 24 mm wide**
- **Downlight for LED strips up to 24 mm wide**
- **incl. LED carrier**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970580	Black		2000 mm	**€ 219.95**
970582	White		2000 mm	**€ 271.95**
970581	Black		2500 mm	**€ 271.95**
970583	White		2500 mm	**€ 335.95**
970578	Aluminium	Anodised	2000 mm	**€ 219.95**
970579	Aluminium	Anodised	2500 mm	**€ 271.95**

Accessories

988109	PLANO MS end cap high surface-mounted, aluminium anodised	**€ 19.95**
988110	PLANO MS end cap high surface-mounted, black	**€ 19.95**
988200	PLANO MS longitudinal connector	**€ 7.95**
988203	PLANO MS corner connector	**€ 14.95**
988206	PLANO aluminium wall bracket	**€ 39.95**

Accessories for **970578**, **970579**

988102	PLANO MS end cap surface-mounted, aluminium anodised	**€ 19.95**
988207	Plano ES and MS anodised aluminium uplight dummy cover	**€ 111.95**
988210	Plano MS anodised aluminium downlight dummy cover	**€ 71.95**

Accessories for **970578**, **970580**, **970582**

988086	PLANO ES and BSH and MS flat opal uplight cover, 2 m	**€ 31.95**
988090	PLANO ES and BSH and MS flat microprism uplight cover, 2 m	**€ 55.95**
988096	PLANO MS flat opal downlight cover, 2 m	**€ 39.95**
988098	PLANO MS high opal downlight cover, 2 m	**€ 79.95**
988100	PLANO MS flat microprism downlight cover, 2 m	**€ 55.95**

Accessories for **970579**, **970581**, **970583**

988087	PLANO ES and BSH and MS flat opal uplight cover, 2.5 m	**€ 39.95**
988091	PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m	**€ 67.95**
988097	PLANO MS flat opal downlight cover, 2.5 m	**€ 51.95**
988099	PLANO MS high opal downlight cover, 2.5 m	**€ 99.95**
988101	PLANO MS flat microprism downlight cover, 2.5 m	**€ 67.95**

Accessories for **970580**, **970581**

988103	PLANO MS end cap surface-mounted, black	**€ 23.95**
988208	Plano ES and MS black uplight dummy cover	**€ 79.95**
988211	Plano MS black downlight dummy cover	**€ 111.95**

Accessories for **970582**, **970583**

988095	PLANO ES and MS - cable suspension set, in pairs	**€ 71.95**
988104	PLANO MS end cap surface-mounted, white	**€ 23.95**
988209	Plano ES and MS white uplight dummy cover	**€ 79.95**
988212	Plano MS white downlight dummy cover	**€ 111.95**





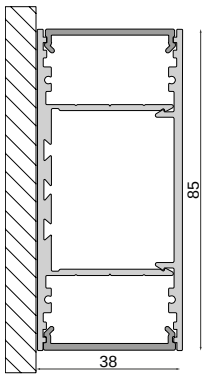

PROFILE PLANO BSH

- **universal light profile**
- **Uplight for LED strips up to 31 mm wide**
- **Downlight for LED strips up to 31 mm wide**
- **incl. LED carrier**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970586	Black		2000 mm	**€ 159.95**
970588	White		2000 mm	**€ 159.95**
970587	Black		2500 mm	**€ 199.95**
970589	White		2500 mm	**€ 199.95**
970584	Aluminium	Anodised	2000 mm	**€ 111.95**
970585	Aluminium	Anodised	2500 mm	**€ 135.95**

Accessories

988202	PLANO BSH longitudinal connector	**€ 7.95**
988205	PLANO BSH corner connector	**€ 14.95**
988206	PLANO aluminium wall bracket	**€ 39.95**
988095	PLANO ES and MS - cable suspension set, in pairs	**€ 71.95**

Accessories for **970584**, **970585**

988106	PLANO glued laminated timber end cap surface-mounted, aluminium anodised	**€ 19.95**
988115	PLANO glued laminated timber end cap high surface-mounted, aluminium anodised	**€ 31.95**

Accessories for **970584**, **970586**, **970588**

988086	PLANO ES and BSH and MS flat opal uplight cover, 2 m	**€ 31.95**
988088	PLANO ES and BSH high opal cover, 2 m	**€ 67.95**
988090	PLANO ES and BSH and MS flat microprism uplight cover, 2 m	**€ 55.95**

Accessories for **970585**, **970587**, **970589**

988087	PLANO ES and BSH and MS flat opal uplight cover, 2.5 m	**€ 39.95**
988089	PLANO ES and BSH high opal cover, 2.5 m	**€ 83.95**
988091	PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m	**€ 67.95**

Accessories for **970586**, **970587**

988107	PLANO glued laminated timber end cap surface-mounted, black	**€ 23.95**
988116	PLANO glued laminated timber end cap high surface-mounted, black	**€ 31.95**

Accessories for **970588**, **970589**

988108	PLANO glued laminated timber end cap surface-mounted, white	**€ 23.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

SYSTEM COMBO

590 concrete profile
596 built-in profile
600 facade profile
604 insulation profile
606 click profile

COMBO profiles

page 594

page 595

page 598

page 599

page 602

page 603

page 605

page 605

page 608

page 609

page 610

COMBO PROFILE SYSTEM – INSTALLATION-FRIENDLY PROFILE-IN-PROFILE SOLUTION

Facades, gardens, living spaces: The patented COMBO PROFILE SYSTEM lends every architectural design a distinctive character. The linear system solution can be integrated into all common building materials. The profile system not only creates perfect light lines in exposed concrete, concrete, brick, stone, plasterboard, thermal insulation, wood, or facade panels — the installation profiles CONCRETE, DRYWALL, FACADE, and INSULATION can also be quickly and cleanly installed by bricklayers, drywall or facade builders.

Equally important as the appearance is the fact that the lighting solutions can be easily integrated into the building structure even under challenging installation conditions. The lighting insert profile is simply clipped into the installation profiles after construction is completed.

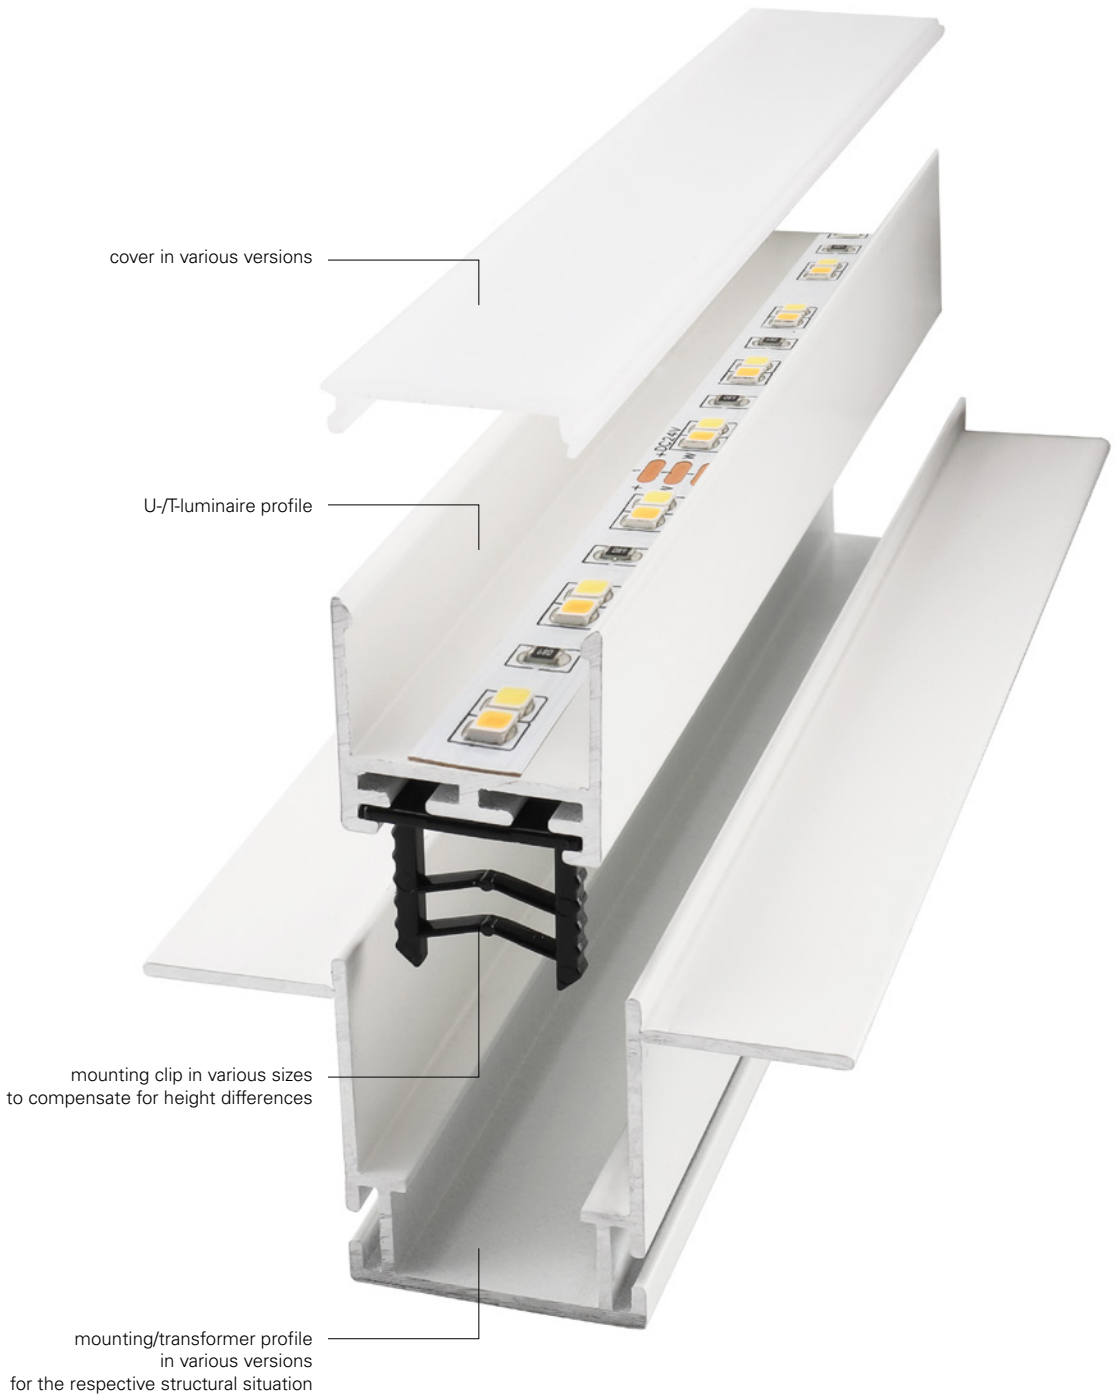

MOUNTING / TRANSFORMER PROFILE CONCRETE

The mounting profile is installed during formwork construction and provides sufficient space for the luminaire profile as well as additional cabling. Optional plaster trim makes all work around the light line easier.
The transformer profile is used to house power supplies, allowing them to be concealed behind the luminaire in the case of long light lines or different circuit configurations.

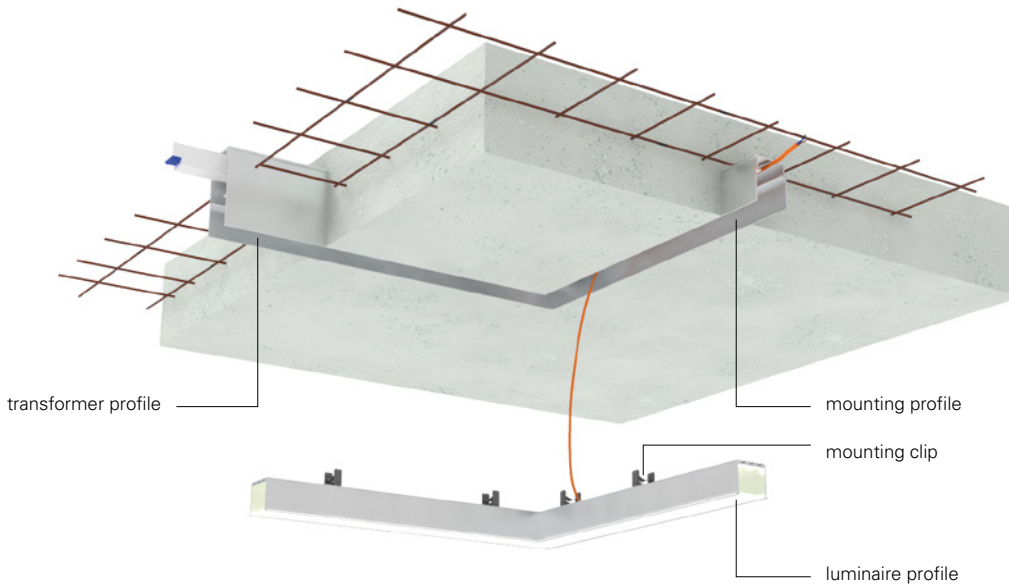

INSTALLATION INSTRUCTIONS CONCRETE

1. Planning of mounting / transformer profile

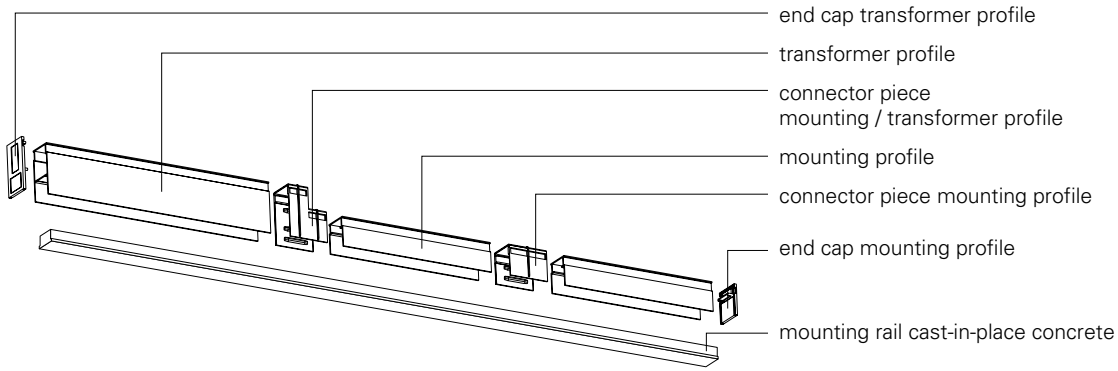

2. Installation, finishing work

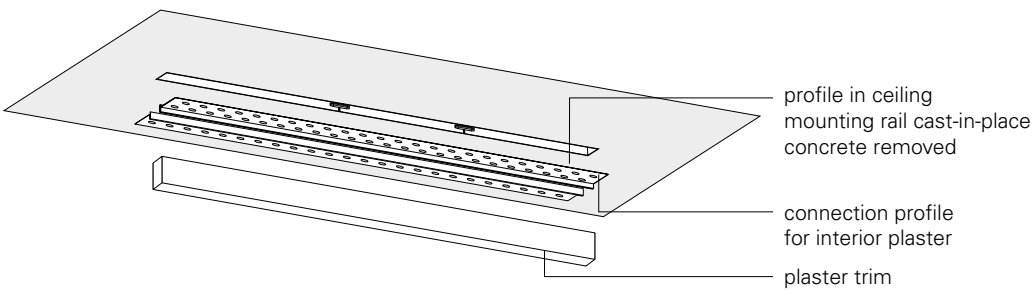

3. Installation of luminaire profile and power supply

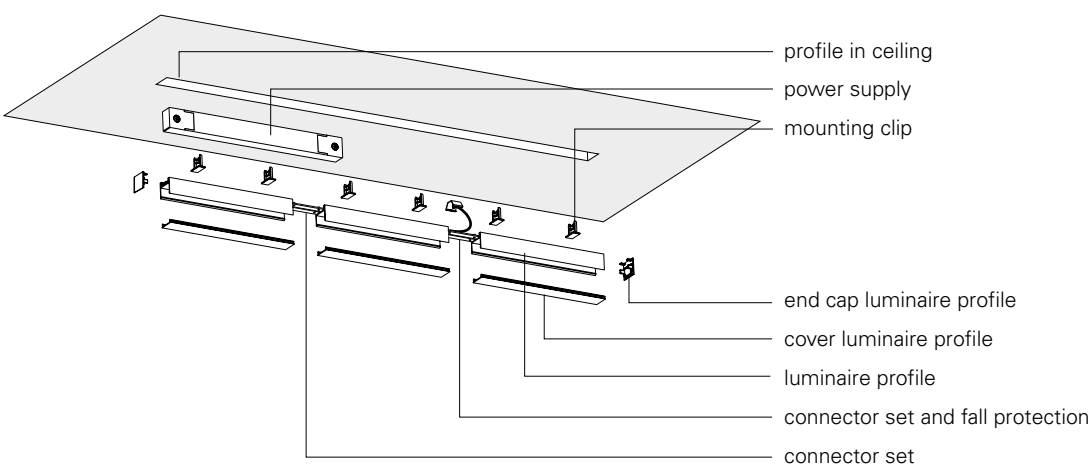





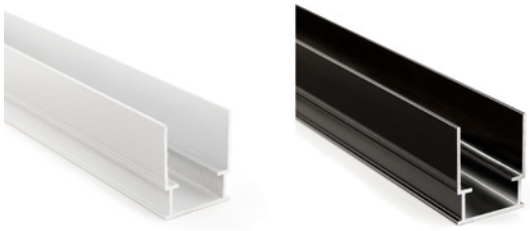



PROFILE, SERIES COMBO, CONCRETE, MOUNTING PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970800	Black	2000 mm	**€ 91.95**
970801	White	2000 mm	**€ 91.95**
970802	Black	3000 mm	**€ 114.95**
970803	White	3000 mm	**€ 114.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 6.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 6.95**
988167	Combo concrete mounting bar wood, 1 m	**€ 12.95**
988168	Combo concrete mounting bar wood, 2 m	**€ 25.95**
970811	Combo connection profile for indoor plastering, natural aluminium, 2.5 m	**€ 62.95**
970812	Combo connection profile for indoor plastering, white, 2.5 m	**€ 91.95**
970810	Combo connection profile for indoor plastering, black, 2.5 m	**€ 91.95**
970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 10.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 22.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 22.95**
988133	Combo concrete end cap 2 pcs. mounting profile with edge covering, white	**€ 4.95**
988132	Combo concrete end cap 2 pcs. mounting profile with edge covering, black	**€ 4.95**
988165	Combo concrete connecting piece mounting profile, white	**€ 4.95**
988164	Combo concrete connecting piece mounting profile, black	**€ 4.95**
988161	Plano concrete connector and guard rail for concrete recessed profile	**€ 17.95**

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.





PROFILE, SERIES COMBO, CONCRETE, TRANSFORMER PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970804	Black	1000 mm	**€ 68.95**
970805	White	1000 mm	**€ 68.95**
970806	Black	2000 mm	**€ 137.95**
970807	White	2000 mm	**€ 137.95**
970808	Black	3000 mm	**€ 206.95**
970809	White	3000 mm	**€ 206.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 6.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 6.95**
988167	Combo concrete mounting bar wood, 1 m	**€ 12.95**
988168	Combo concrete mounting bar wood, 2 m	**€ 25.95**
970811	Combo connection profile for indoor plastering, natural aluminium, 2.5 m	**€ 62.95**
970812	Combo connection profile for indoor plastering, white, 2.5 m	**€ 91.95**
970810	Combo connection profile for indoor plastering, black, 2.5 m	**€ 91.95**
970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 10.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 22.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 22.95**
988135	Combo concrete end cap 2 pcs. transformer profile with edge covering, white	**€ 4.95**
988134	Combo concrete end cap 2 pcs. transformer profile with edge covering, black	**€ 4.95**
988163	Combo concrete connecting piece mounting profile - transformer profile, white	**€ 4.95**
988162	Combo concrete connecting piece mounting profile - transformer profile, black	**€ 4.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

MOUNTING & TRANSFORMER PROFILE DRYWALL

The mounting profile can be neatly integrated on site and provides sufficient space for concealed cable routing – perfect for preparing light lines in drywall, plastered brick, thermal insulation, wood, fiberboard, etc. The luminaire profile is simply clipped in at the end.

For direct wall connection, the mounting flanges feature a predetermined breaking point for a clean separation. The transformer profile is used to house power supplies, allowing them to be concealed behind the luminaire in the case of long light lines or different circuit configurations.

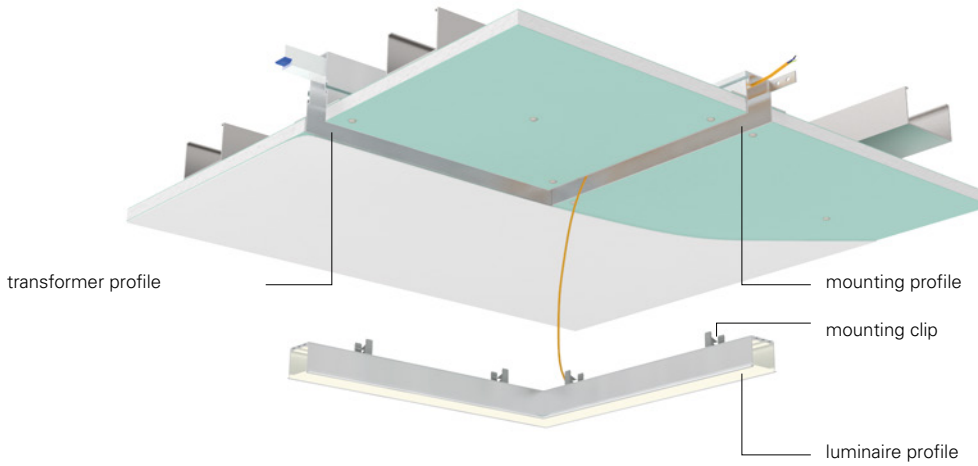

INSTALLATION INSTRUCTIONS BRICK, PLASTERBOARD, WOOD

1. Planning of mounting / transformer profile

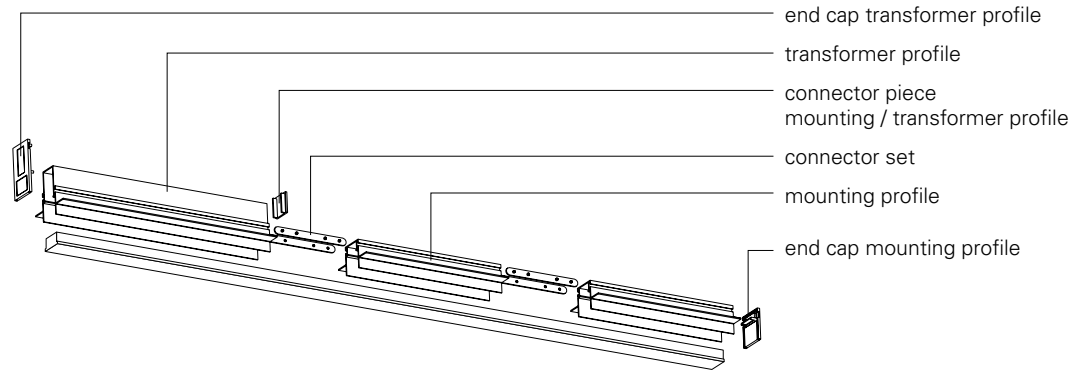

2. Installation, finishing work

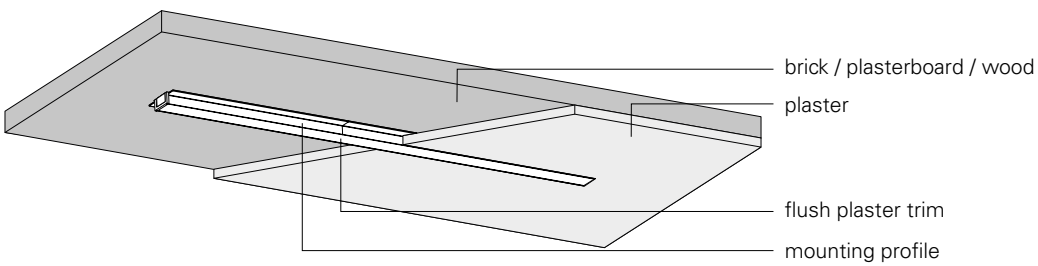

3. Installation of luminaire profile and power supply

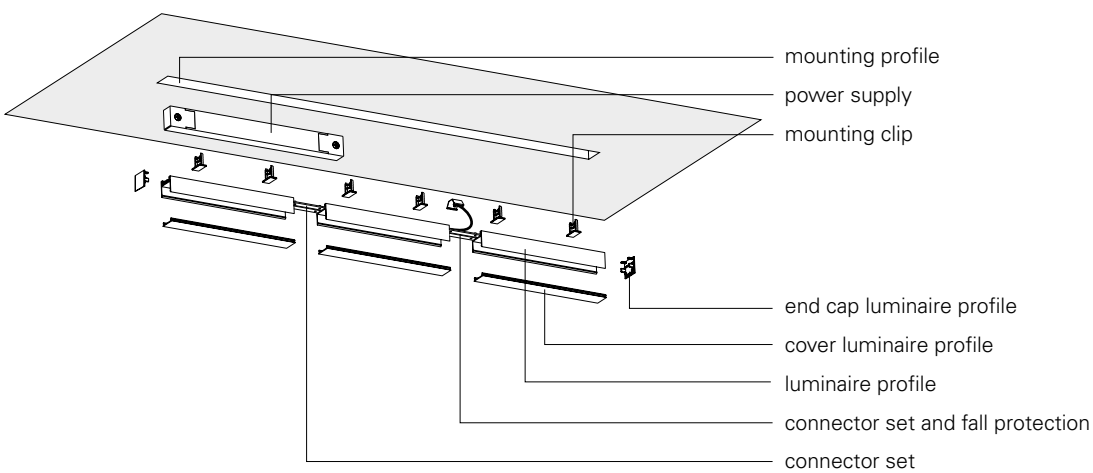

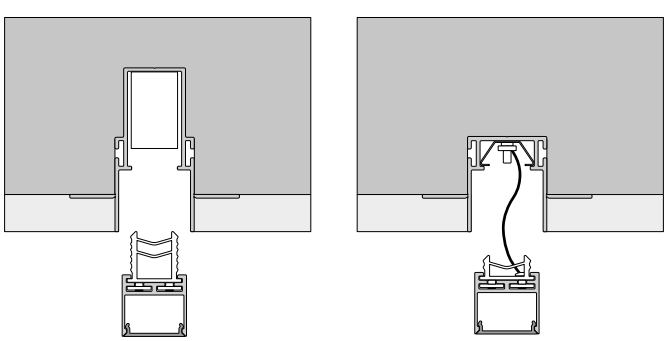



PROFILE, SERIES COMBO, BUILT-IN, MOUNTING PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970820	Aluminium	1000 mm	**€ 31.95**
970821	Black	1000 mm	**€ 43.95**
970822	White	1000 mm	**€ 43.95**
970823	Aluminium	2000 mm	**€ 64.95**
970824	Black	2000 mm	**€ 86.95**
970825	White	2000 mm	**€ 86.95**
970826	Aluminium	3000 mm	**€ 96.95**
970827	Black	3000 mm	**€ 130.95**
970828	White	3000 mm	**€ 130.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 6.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 6.95**
970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 10.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 22.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 22.95**
988174	Combo connector and fall protection	**€ 17.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 9.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 9.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 24.95**
988137	Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, white	**€ 4.95**
988136	Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, black	**€ 4.95**

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.



PROFILE, SERIES COMBO, BUILT-IN, TRANSFORMER PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970833	Aluminium	1000 mm	**€ 45.95**
970834	Black	1000 mm	**€ 85.95**
970835	White	1000 mm	**€ 85.95**
970836	Aluminium	2000 mm	**€ 91.95**
970837	Black	2000 mm	**€ 172.95**
970838	White	2000 mm	**€ 172.95**
970839	Aluminium	3000 mm	**€ 137.95**
970840	Black	3000 mm	**€ 218.95**
970841	White	3000 mm	**€ 218.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 6.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 6.95**
970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 10.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 22.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 22.95**
988174	Combo connector and fall protection	**€ 17.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 9.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 9.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 24.95**
988141	Combo built-in/facade/insulation end cap 2 pcs. transformer profile, white	**€ 4.95**
988138	Combo built-in/facade/insulation end cap 2 pcs. transformer profile, black	**€ 4.95**
988140	Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, white	**€ 4.95**
988139	Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, black	**€ 4.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

MOUNTING / TRANSFORMER PROFILE FACADE

The 3 mm mounting profile enables lighting solutions in areas with low installation height, such as Trespa or aluminium facade panels. Installation takes place behind the facade panel; any height difference of more than 3 mm can be adjusted during installation of the light profiles using the mounting clips. In combination with a thermal insulation connection profile CT, the 3 mm mounting profile can also be subsequently inserted into the insulation before plastering work. Thanks to the thermal and mechanical separation from the luminaire profile, cracks along the light line are avoided.
By adding the 3 mm transformer profile, users can—beyond the applications of the 3 mm mounting profile—also integrate the corresponding power supplies into the light line. This allows for on-site replacement if needed. The mechanical separation between the light and transformer profiles ensures that damage, especially on plastered facades, is prevented.

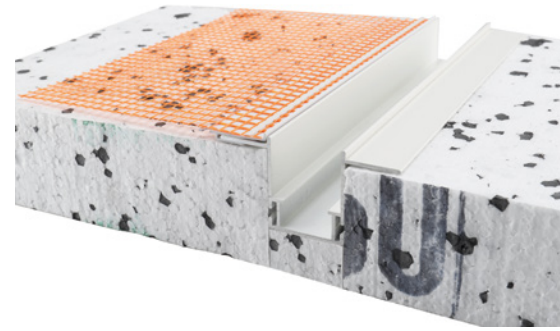

INSTALLATION INSTRUCTIONS INSULATION AND FACADE PANELS

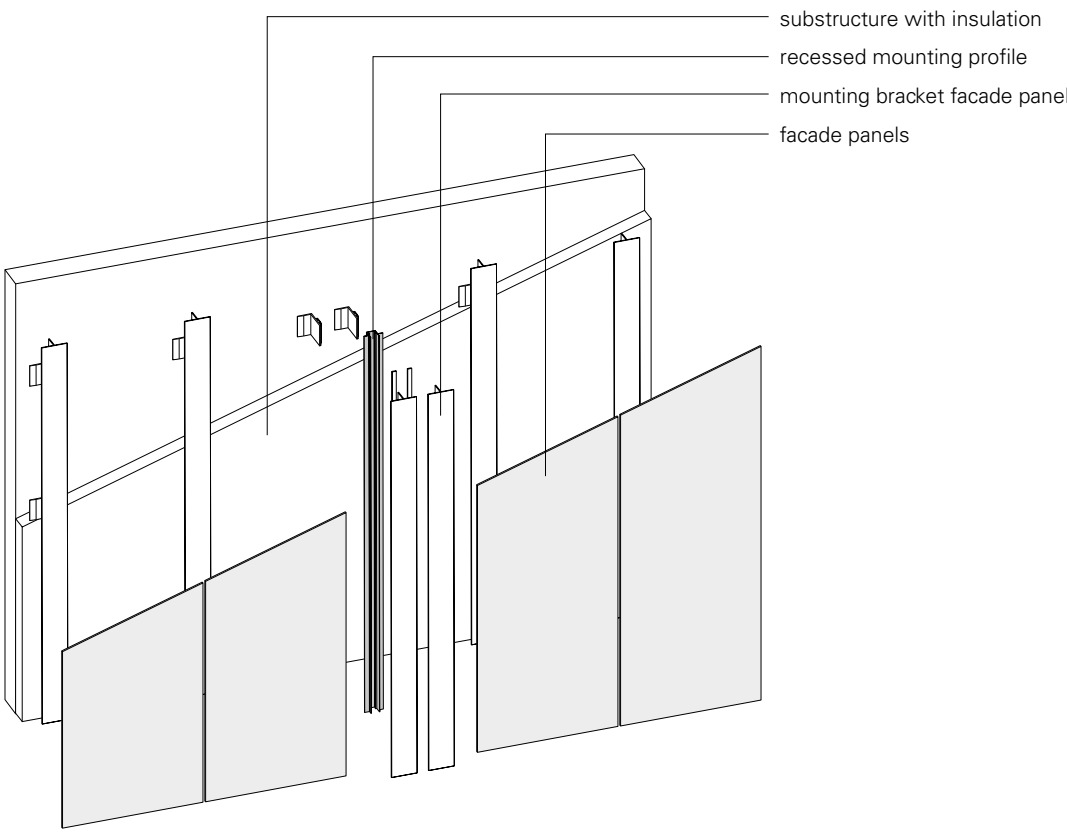

INSTALLATION INSTRUCTIONS INSULATION AND PLASTER

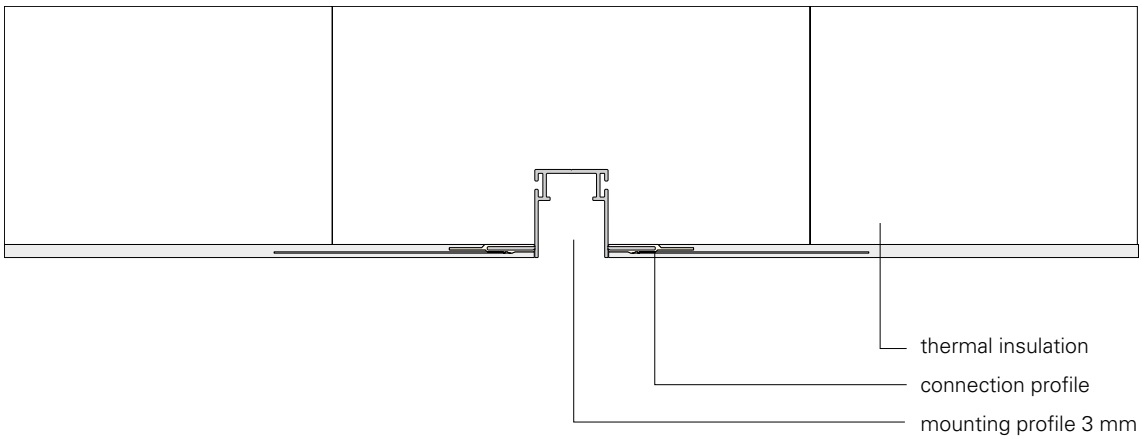

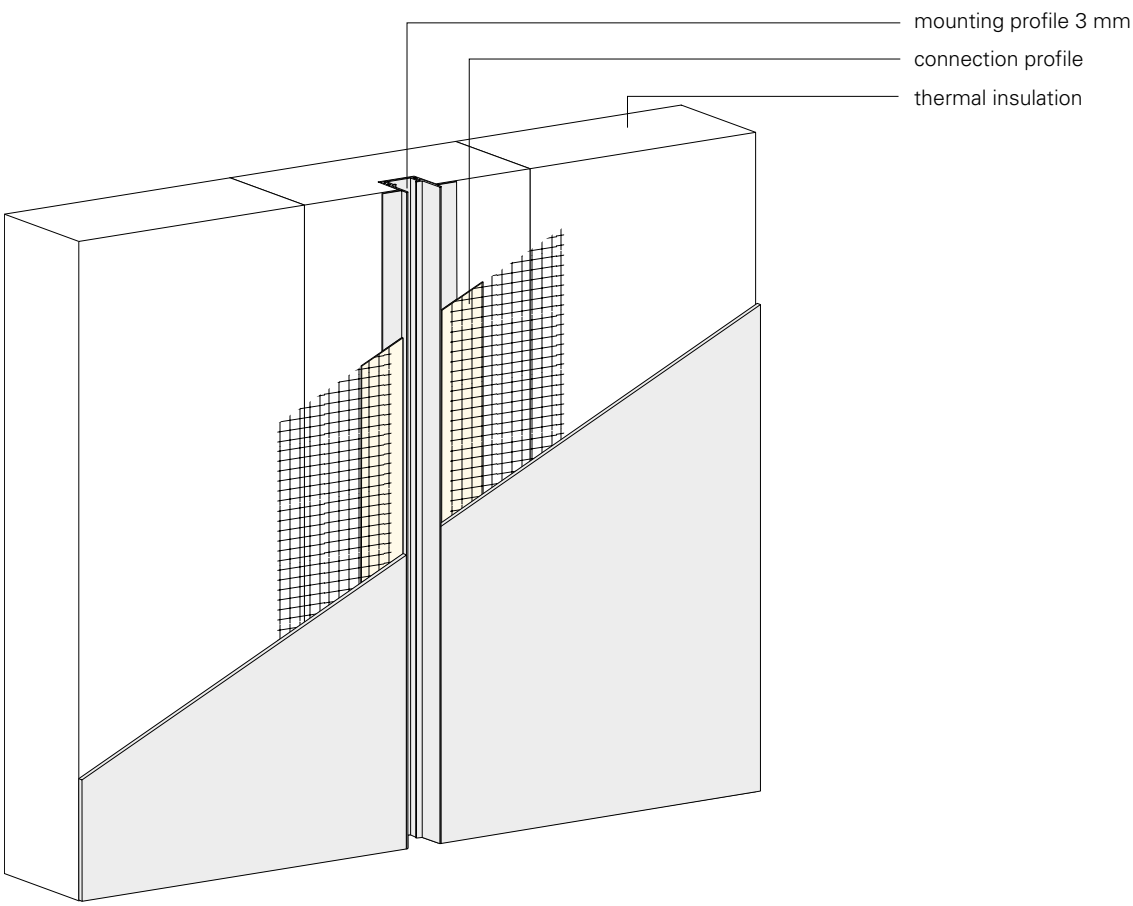



PROFILES, COMBO SERIES, FACADE, TRANSFORMER PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970869	Black	1000 mm	**€ 85.95**
970870	White	1000 mm	**€ 85.95**
970871	Black	2000 mm	**€ 172.95**
970872	White	2000 mm	**€ 172.95**

Accessories

970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 10.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 22.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 22.95**
988136	Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, black	**€ 4.95**
988137	Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, white	**€ 4.95**
988138	Combo built-in/facade/insulation end cap 2 pcs. transformer profile, black	**€ 4.95**
988139	Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, black	**€ 4.95**
988140	Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, white	**€ 4.95**
988141	Combo built-in/facade/insulation end cap 2 pcs. transformer profile, white	**€ 4.95**
988169	Combo connection profile with fabric for levelling work, 3mm, 2m, orange	**€ 22.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 24.95**
988176	Combo connector set of 2 with angle joint 0/20-160°, natural aluminium	**€ 9.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 9.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 9.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 6.95**
988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 6.95**

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.



PROFILES, COMBO SERIES, FAÇADE, MOUNTING PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970829	Black	2000 mm	**€ 86.95**
970830	White	2000 mm	**€ 86.95**
970831	Black	3000 mm	**€ 130.95**
970832	White	3000 mm	**€ 130.95**

Accessories

970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 10.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 22.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 22.95**
988136	Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, black	**€ 4.95**
988137	Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, white	**€ 4.95**
988138	Combo built-in/facade/insulation end cap 2 pcs. transformer profile, black	**€ 4.95**
988139	Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, black	**€ 4.95**
988140	Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, white	**€ 4.95**
988141	Combo built-in/facade/insulation end cap 2 pcs. transformer profile, white	**€ 4.95**
988169	Combo connection profile with fabric for levelling work, 3mm, 2m, orange	**€ 22.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 24.95**
988176	Combo connector set of 2 with angle joint 0/20-160°, natural aluminium	**€ 9.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 9.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 9.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 6.95**
988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 6.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

MOUNTING / TRANSFORMER PROFILE INSULATION

The mounting profile allows for easy installation of recessed profiles into thermal insulation and can be equipped with all profiles after the surface has been finished. The mounting profile allows for easy installation of recessed profiles into thermal insulation and can be equipped with all profiles after the surface has been finished.

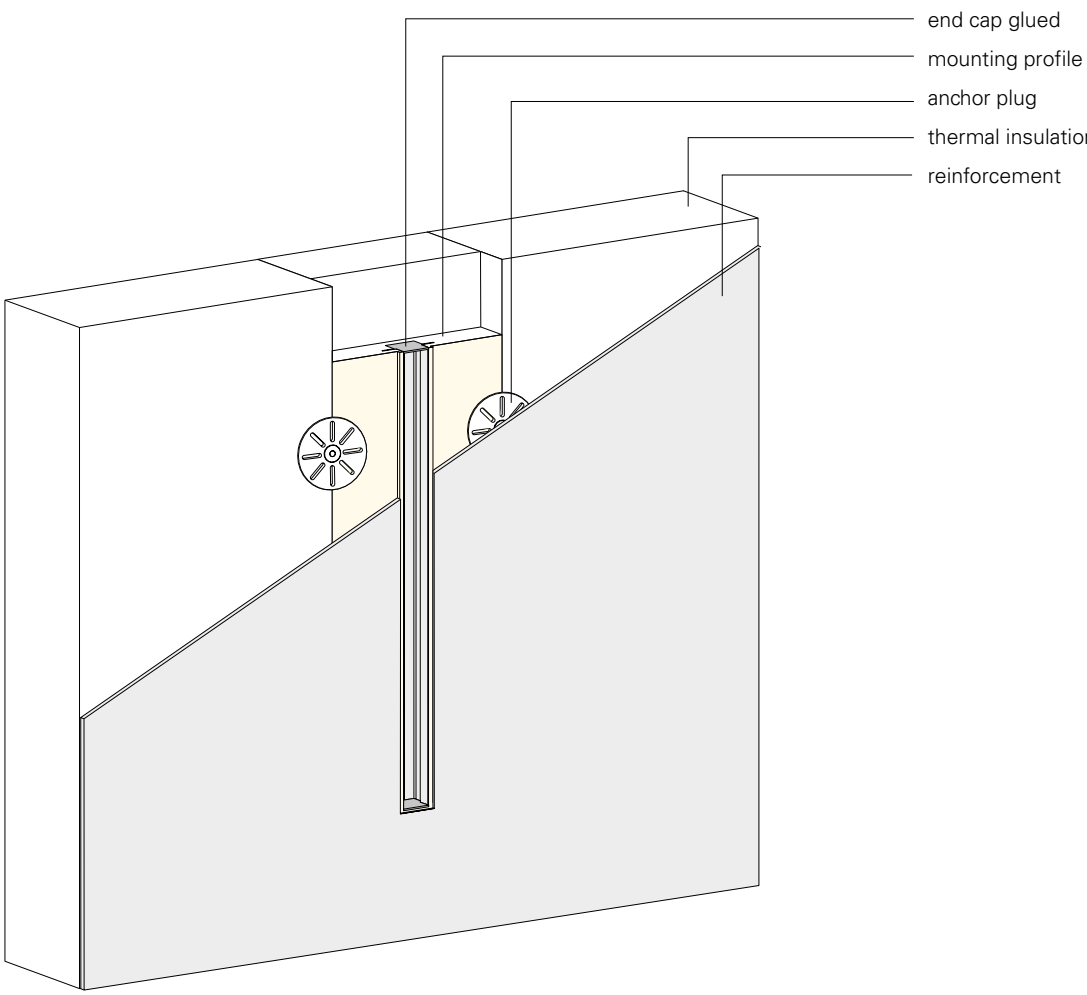

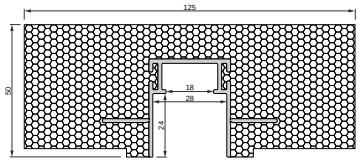

PROFILES, COMBO SERIES, INSULATION, MOUNTING PROFILE

Housing EPS Length 2000 mm

Article	Housing Color	Price
988170	Black	**€ 402.95**
988171	White	**€ 402.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 6.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 9.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 24.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 9.95**
988137	Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, white	**€ 4.95**
988136	Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, black	**€ 4.95**

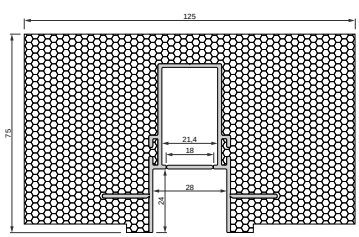

PROFILES, COMBO SERIES, INSULATION, TRANSFORMER PROFILE

Housing EPS Length 1000 mm

Article	Housing Color	Price
988172	Black	**€ 218.95**
988173	White	**€ 218.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 6.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 9.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 24.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 9.95**
988141	Combo built-in/facade/insulation end cap 2 pcs. transformer profile, white	**€ 4.95**
988138	Combo built-in/facade/insulation end cap 2 pcs. transformer profile, black	**€ 4.95**
988140	Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, white	**€ 4.95**
988139	Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, black	**€ 4.95**

LUMINAIRE PROFILE

To complete your light lines within the various transformer and mounting profiles, the extensive range of accessories leaves nothing to be desired. Tools such as connectors with fall protection or cable holders significantly simplify installation. Depending on the nature of the transition to the mounting / transformer profile, you can cover it using the LT-0-20 or accentuate the resulting shadow gap with the LU-02-20. As a general rule, all luminaire profiles should be connected using connectors to prevent mechanical stress on the LED strips caused by differing expansion.

INSTALLATION INSTRUCTIONS LUMINAIRE PROFILE

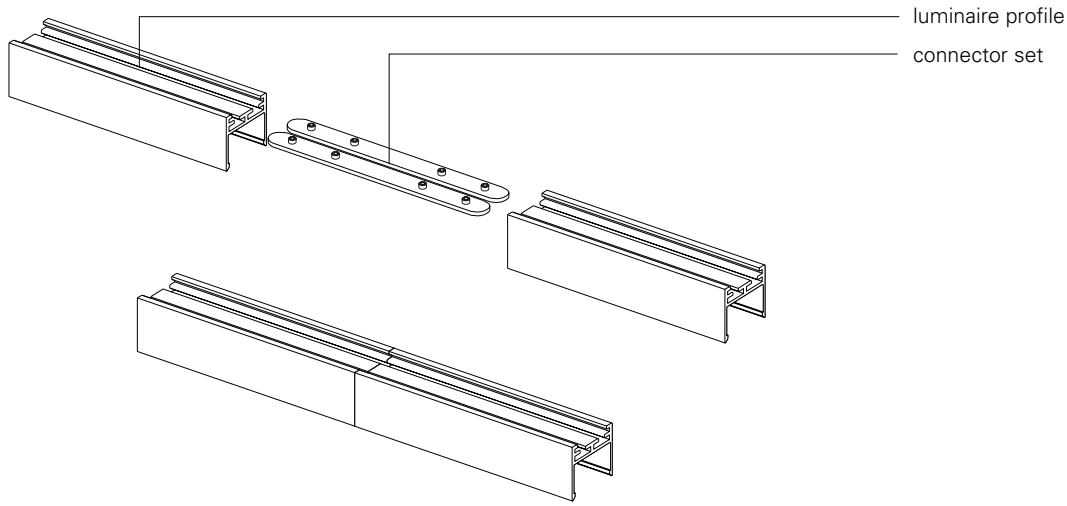

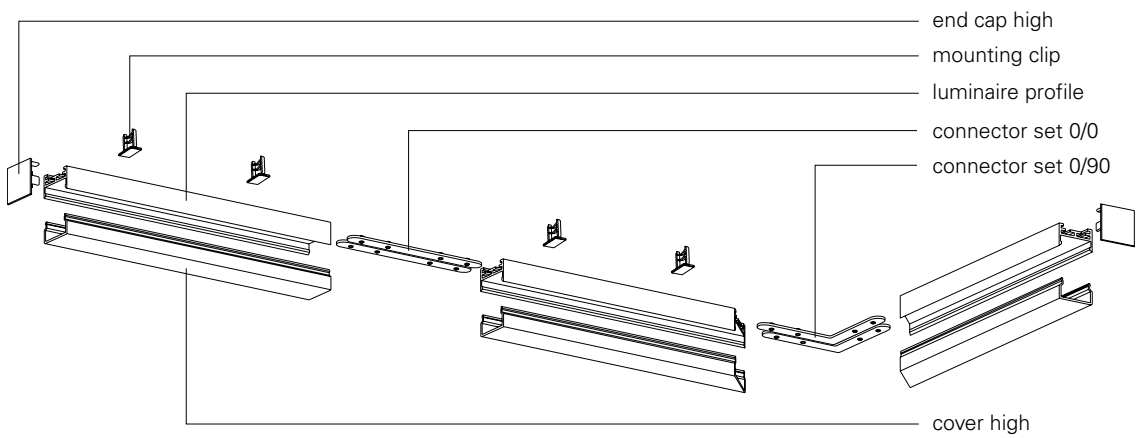



PROFILE, SERIES COMBO, CLICK U-PROFILE

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970848	White		1000 mm	**€ 27.95**
970842	Silver	Anodised	1000 mm	**€ 25.95**
970845	Black		1000 mm	**€ 27.95**
970849	White		2000 mm	**€ 54.95**
970843	Silver	Anodised	2000 mm	**€ 49.95**
970846	Black		2000 mm	**€ 54.95**
970850	White		3000 mm	**€ 82.95**
970844	Silver	Anodised	3000 mm	**€ 75.95**
970847	Black		3000 mm	**€ 82.95**

Accessories

988126	Combo cover, H-02-20, high, milky, 1 m	**€ 14.95**
988127	Combo cover, H-02-20, high, milky, 2 m	**€ 29.95**
988128	Combo cover, H-02-20, high, milky, 3 m	**€ 44.95**
988122	Combo cover, B-02-20, wide, milky, 1 m	**€ 11.95**
988120	Combo cover, B-02-20, wide, milky, 2 m	**€ 22.95**
988121	Combo cover, B-02-20, wide, milky, 3 m	**€ 33.95**
988123	Combo click cover V4-HL-25 opal, 1 m	**€ 9.95**
988124	Combo click cover V4-HL-25 opal, 2 m	**€ 17.95**
988125	Combo click cover V4-HL-25 opal, 3 m	**€ 27.95**
988148	Combo end cap 2 pcs. U-light profile, P-LU-02-20, grey	**€ 6.45**
988146	Combo end cap 2 pcs. U-light profile, P-LU-02-20, white	**€ 4.95**
988145	Combo end cap 2 pcs. U-light profile, P-LU-02-20, black	**€ 4.95**
988147	Combo end cap 2 pcs. U-light profile, B-LU-02-20, white	**€ 10.95**
988142	Combo end cap 2 pcs. U-light profile, H-LU-02-20, grey	**€ 6.45**
988144	Combo end cap 2 pcs. U-light profile, H-LU-02-20, white	**€ 6.45**
988143	Combo end cap 2 pcs. U-light profile, H-LU-02-20, black	**€ 6.45**
988184	Combo set 10 pcs. Mounting clip, height-adjustable V1, 10mm, blue	**€ 23.95**
988185	Combo set 10 pcs. Mounting clip, height-adjustable V2, 10mm, black	**€ 23.95**
988186	Combo set 10 pcs. Mounting clip, height-adjustable V3, 10mm, yellow	**€ 23.95**

LED stripes
Suitable LED strips can be found in the LED Strips chapter – available in various voltages and designs for indoor and outdoor applications.



PROFILE, SERIES COMBO, CLICK T-PROFILE

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970866	White		1000 mm	**€ 31.95**
970860	Silver	Anodised	1000 mm	**€ 28.95**
970863	Black		1000 mm	**€ 31.95**
970867	White		2000 mm	**€ 64.95**
970861	Silver	Anodised	2000 mm	**€ 57.95**
970864	Black		2000 mm	**€ 64.95**
970868	White		3000 mm	**€ 96.95**
970862	Silver	Anodised	3000 mm	**€ 85.95**
970865	Black		3000 mm	**€ 96.95**

Accessories

988122	Combo cover, B-02-20, wide, milky, 1 m	**€ 11.95**
988120	Combo cover, B-02-20, wide, milky, 2 m	**€ 22.95**
988121	Combo cover, B-02-20, wide, milky, 3 m	**€ 33.95**
988123	Combo click cover V4-HL-25 opal, 1 m	**€ 9.95**
988124	Combo click cover V4-HL-25 opal, 2 m	**€ 17.95**
988125	Combo click cover V4-HL-25 opal, 3 m	**€ 27.95**
988126	Combo cover, H-02-20, high, milky, 1 m	**€ 14.95**
988127	Combo cover, H-02-20, high, milky, 2 m	**€ 29.95**
988128	Combo cover, H-02-20, high, milky, 3 m	**€ 44.95**
988158	Combo end cap 2 pcs. T-light profile, P-LT-02-20, grey	**€ 6.45**
988160	Combo end cap 2 pcs. T-light profile, P-LT-02-20, white	**€ 6.45**
988159	Combo end cap 2 pcs. T-light profile, P-LT-02-20, black	**€ 6.45**
988155	Combo end cap 2 pcs. T-light profile, H-LT-02-20, grey	**€ 6.45**
988157	Combo end cap 2 pcs. T-light profile, H-LT-02-20, white	**€ 6.45**
988156	Combo end cap 2 pcs. T-light profile, H-LT-02-20, black	**€ 6.45**
988198	Combo click/flat/hinge wing recessed mounting spring set (2 pieces)	**€ 3.25**
988184	Combo set 10 pcs. Mounting clip, height-adjustable V1, 10mm, blue	**€ 23.95**
988185	Combo set 10 pcs. Mounting clip, height-adjustable V2, 10mm, black	**€ 23.95**
988186	Combo set 10 pcs. Mounting clip, height-adjustable V3, 10mm, yellow	**€ 23.95**

LED stripes
Suitable LED strips can be found in the LED Strips chapter – available in various voltages and designs for indoor and outdoor applications.

NEW

PROFILE, SERIES COMBO, CLICK U-PROFILE FLAT

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970857	White		1000 mm	**€ 27.95**
970851	Silver	Anodised	1000 mm	**€ 25.95**
970854	Black		1000 mm	**€ 27.95**
970858	White		2000 mm	**€ 54.95**
970852	Silver	Anodised	2000 mm	**€ 49.95**
970855	Black		2000 mm	**€ 54.95**
970859	White		3000 mm	**€ 82.95**
970853	Silver	Anodised	3000 mm	**€ 75.95**
970856	Black		3000 mm	**€ 82.95**

Accessories

988123	Combo click cover V4-HL-25 opal, 1 m	**€ 9.95**
988124	Combo click cover V4-HL-25 opal, 2 m	**€ 17.95**
988125	Combo click cover V4-HL-25 opal, 3 m	**€ 27.95**
988126	Combo cover, H-02-20, high, milky, 1 m	**€ 14.95**
988127	Combo cover, H-02-20, high, milky, 2 m	**€ 29.95**
988128	Combo cover, H-02-20, high, milky, 3 m	**€ 44.95**
988149	Combo end cap, metallised, 1 pc., suitable for H-02-20 high cover	**€ 6.95**
988150	Combo end cap, black, 1 pc., suitable for H-02-20 high cover	**€ 3.45**
988151	Combo end cap, white, 1 pc., suitable for H-02-20 high cover	**€ 3.45**
988152	Combo end cap, metallised, 1 pc., suitable for V4-HL-25 opal cover	**€ 6.95**
988153	Combo end cap, black, 1 pc., suitable for V4-HL-25 opal cover	**€ 3.45**
988154	Combo end cap, white, 1 pc., suitable for V4-HL-25 opal cover	**€ 3.45**
988184	Combo set 10 pcs. Mounting clip, height-adjustable V1, 10mm, blue	**€ 23.95**
988185	Combo set 10 pcs. Mounting clip, height-adjustable V2, 10mm, black	**€ 23.95**
988186	Combo set 10 pcs. Mounting clip, height-adjustable V3, 10mm, yellow	**€ 23.95**

LED stripes
Suitable LED strips can be found in the LED Strips chapter – available in various voltages and designs for indoor and outdoor applications.

ALUMINIUM PROFILES

614 linear light in 5 steps
618 assembly
620 homogeneous light image
622 U-profiles - flat + high - built-in / built-on
644 T-profiles - flat + high - built in
658 H- and groove-profiles
662 step/plinth/angle/corner-profiles - built-in/built-on
684 dry construction profiles
704 tile profiles
712 profiles for outdoor usw - walkable/trafficable

LINEAR LIGHT IN 5 STEPS

STEP BY STEP TO BECOMING A LINEAR LIGHT PROFESSIONAL!

It has never been quicker and easier to put together an individually and perfectly coordinated linear light in max. 5 steps. Test how quickly and easily you can put your personal project into practice.

1

CHOOSE YOUR PROFILE

Whether for indoor or outdoor use, for wide or narrow LED stripes, whether the profile is to be should be low or high. Matching to this you can choose between different shapes and light transmittance of the covers.

2

CHOOSE THE RIGHT LED STRIPE

You can choose between strips for indoor or outdoor use, with one or more light colours, high-power strips for basic lighting or fewer lumens for ambient lighting. Various cut sizes and LED spacing also perfectly round off our range here.

3

SELECT THE REQUIRED POWER SUPPLY

In addition to the various protection classes for the respective place of use and voltages, you can choose from different designs and power classes. Our range is complemented by power supplies that can be dimmed directly or controlled via Dali, KNX or 1-10V.

4

DO YOU NEED A CONTROLLER TO STEER?
In this category, you can select the appropriate control controller or LED dimmer according to requirements and customer wishes. Whether control via radio, smartphone, DMX, Dali, etc. – almost no [control] wishes remain unfulfilled!

5

ACCESSORIES, MOUNTING MATERIAL & CO
In the last step, you will find everything that makes installation easier, faster and more comfortable and gives the linear desired light a perfect finish.

aluminium profiles

page 624

page 660

page 664

page 668



page 670

page 672

page 674

page 676

page 678



page 686

page 688

page 690



page 692

page 694

page 696

page 698

page 700

page 702

page 706

page 714

page 716

page 718

ASSEMBLY FOR PROFILES AND STRIPES

We provide our products individually made to measure on request.
You will receive the prices on request.

989100 – **service package I** – profile cut

profile is shortened to desired length, tolerance ± 1 mm | sawing loss 4 mm

989105 – **drill hole end cap / profile**

hole for cable outlet in end cap or profile

989200 – **service package II** – cover cut

cover is shortened to desired length, tolerance ± 1 mm | sawing loss 4 mm

989300 – **service package III** – stripe cut

LED stripe is adapted to desired length, taking into account segment and maximum total length, including soldering of a cable lead of the desired length and open, tinned wire ends

989305 – **cable** – connecting cable / cores 1 channel
989310 – **cable** – connecting cable / cores 2 channel
989315 – **cable** – connecting cable / cores 3 + 4 channel
989320 – **cable** – mini cable / cores 1 - 4 channel
989325 – **cable** – connecting cable / cores 5 channel

989301 – **2nd connecting cable**

attachment of a 2nd connecting cable / cores for further connection with open tinned wire ends

989302 – **connecting cable**

attaching / soldering a fixed connection line / cores between 2 stripe pieces
[max. 1m connection line / cores incl., a longer connection will be charged by the metre]
original length and max. total length of the strip to be operated may not be exceeded by sections be exceeded

989350 – **IP surcharge** – sealing stripe

sealing a shortened IP stripe / gluing an end cap

989400 – **service package IV** – complete assembly

bringing together and assembling all components into a finished luminaire
incl. function test and cable flag
[for desired length, please add 2cm to the cut length of the LED stripe segment for connection space, length tolerance +/- 2mm]

HOMOGENEOUS LIGHT IMAGE

How to achieve a homogeneous light image
In combination with a milky 40% cover and a matching LED stripe, a homogeneous light image can be created. The distance [pixel pitch] between the LEDs and the cover is decisive.

The rule of thumb here is:
The distance between the LEDs should be smaller than the distance between the LEDs and the cover.

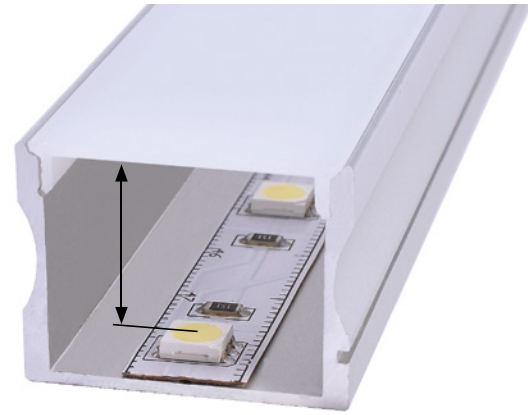

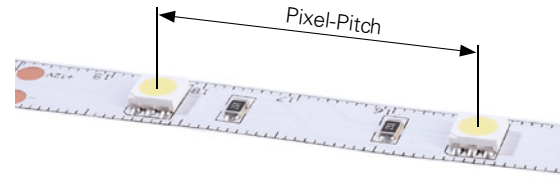

PROFILE DESCRIPTION

mounting type: A = built-on
E = built-in

Width of the series [10 profile] / of the matching LED stripe

AU - 01 - 10

basic form

series

TRANSLUCENCY / LIGHT TRANSMISSION

95% clear

75% mat

40% milky

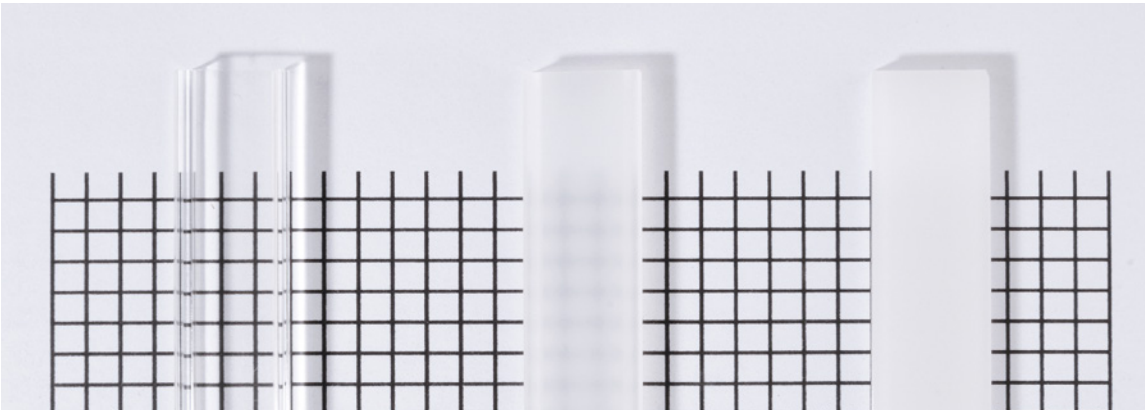

Presentation of various LED strips with different pixel pitches in combination with three levels of cover light transmission. This selection illustrates the visual differences between various LED strips when combined with different covers in the AU-01-10 aluminum profile with a profile height of 7 mm.

120 LED/m
cutting option 50 mm / 6 LED

240 LED/m
cutting option 25 mm / 6 LED

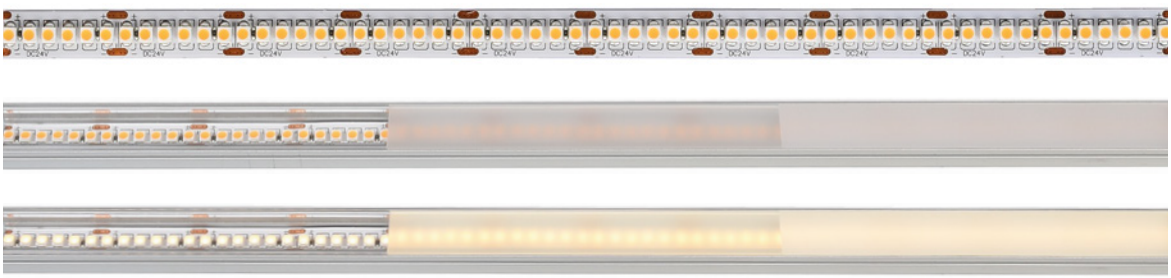

700LED/m
cutting option 10 mm / 7 LED

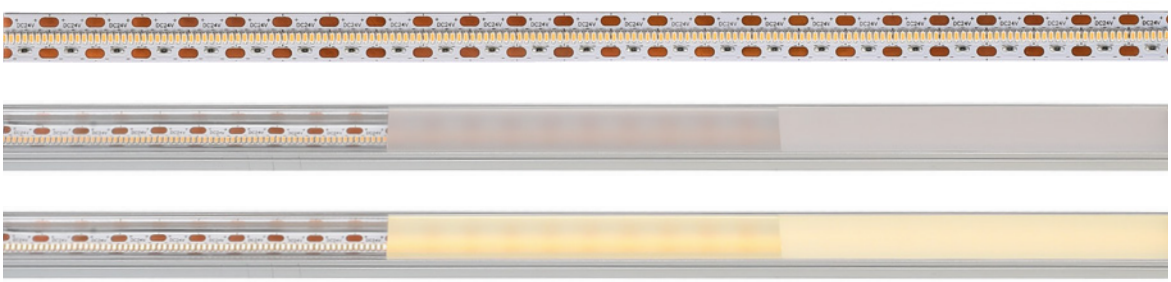

COB 480 LED/m
cutting option 50 mm / 24 LED

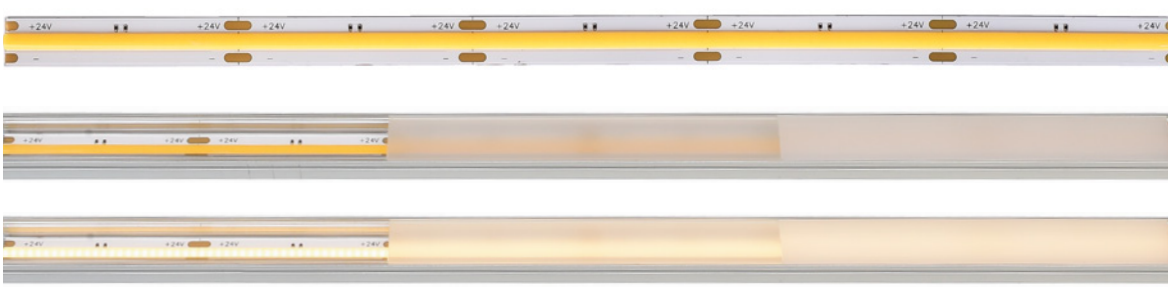

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

U- AND T-PROFILES

The profiles of these series are available in various designs.
Thanks to their universal profile shape, they can be used flexibly in almost all areas. Thanks to their profile construction, they are ideally suited for the cover cut edges.

AU-01-05

·for LED strips up to 5.7 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
970081	Silver	Matt / Anodised	**€ 13.95**
970085	White	Matt / Powder-coated	**€ 12.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Milky	
2 m	**983551**	**983555**	**€ 9.95**
2 m		**984055**	**€ 9.95**
2 m		**984555**	**€ 9.95**

end caps set | 2 pieces | Plastic | € 3.95

	White	Grey	Black
	**978660**	**978661**	**978662**
	**979160**	**979161**	**979162**
	**979660**	**979661**	**979662**

AU-02-05

·for LED strips up to 5.7 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
970181	Silver	Matt / Anodised	**€ 14.95**
970183	Black	Matt / Anodised	**€ 14.95**
970185	White	Matt / Powder-coated	**€ 14.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Milky	
2 m	**983551**	**983555**	**€ 9.95**
2 m		**984055**	**€ 9.95**
2 m		**984555**	**€ 9.95**

end caps set | 2 pieces | Plastic | € 3.95

	White	Grey	Black
	978670	**978671**	**978672**
	979170	**979171**	**979172**
	**979670**	**979671**	

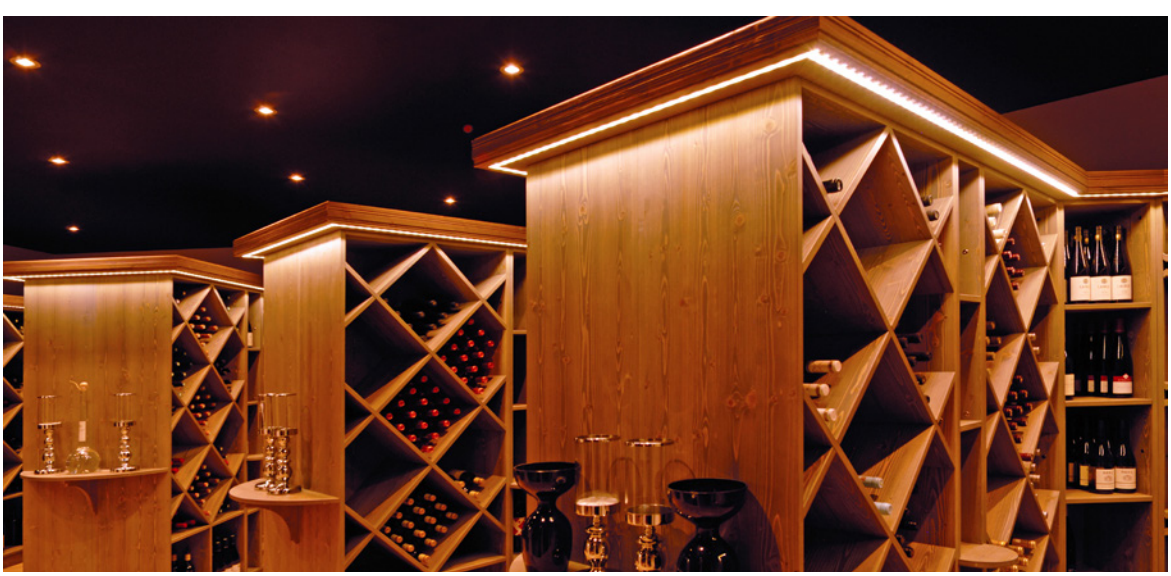

AU-01-08

· for LED strips up to 9.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
970001	Silver	Matt / Anodised	**€ 18.95**
970003	Black	Matt / Anodised	**€ 18.95**
970005	White	Matt / Powder-coated	**€ 18.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
2 m	**983001**	**983003**	**983005**	**€ 13.95**	**978000**	**978001**	**978002**
							
2 m	**983501**	**983503**	**983505**	**€ 13.95**	**978500**	**978501**	**978502**
							
2 m		**984003**	**984005**	**€ 13.95**	**979080**	**979081**	**979082**
							
2 m		**984503**	**984505**	**€ 13.95**	**979580**	**979581**	**979582**

930347	3M double-sided adhesive tape 50,000x12x0.2 mm		**€ 25.95**
987002	Set of 2 retaining clips for AU-08		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

AU-02-08

·for LED strips up to 9.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
970101	Silver	Matt / Anodised	**€ 22.95**
970103	Black	Matt / Anodised	**€ 22.95**
970105	White	Matt / Powder-coated	**€ 22.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
2 m	**983001**	**983003**	**983005**	**€ 13.95**	**978040**	**978041**	**978042**
2 m	**983501**	**983503**	**983505**	**€ 13.95**	**978540**	**978541**	**978542**
2 m		**984003**	**984005**	**€ 13.95**	**979100**	**979101**	**979102**
2 m		**984503**	**984505**	**€ 13.95**	**979600**	**979601**	**979602**

930347	3M double-sided adhesive tape 50,000x12x0.2 mm		**€ 25.95**
987002	Set of 2 retaining clips for AU-08		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

AU-01-10

·for LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970021	Silver	Matt / Anodised	2000 mm	**€ 18.95**
970023	Black	Matt / Anodised	2000 mm	**€ 18.95**
970028	Silver	Matt / Anodised	3000 mm	**€ 28.95**
970025	White	Matt / Powder-coated	2000 mm	**€ 18.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
2 m	**983011**	**983013**	**983015**	**€ 13.95**	**978010**	**978011**	**978012**
3 m	**983016**	**983017**	**983018**	**€ 20.95**			
							
2 m	**983511**	**983513**	**983515**	**€ 13.95**	**978510**	**978511**	**978512**
3 m	**983516**	**983517**	**983518**	**€ 20.95**			
							
2 m		**984013**	**984015**	**€ 13.95**	**979000**	**979001**	**979002**
3 m		**984017**	**984018**	**€ 20.95**			
							
2 m		**984513**	**984515**	**€ 13.95**	**979500**	**979501**	**979502**
3 m		**984517**	**984518**	**€ 20.95**			
							
2 m	**985011**			**€ 13.95**	**980000**	**980001**	**980002**
3 m	**985016**			**€ 20.95**			

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 30.95**
987004	Set of 2 retaining clips for AU-10		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

AU-02-10

·for LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970121	Silver	Matt / Anodised	2000 mm	**€ 22.95**
970123	Black	Matt / Anodised	2000 mm	**€ 22.95**
970128	Silver	Matt / Anodised	3000 mm	**€ 35.95**
970125	White	Matt / Powder-coated	2000 mm	**€ 22.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
2 m	**983011**	**983013**	**983015**	**€ 13.95**
3 m	**983016**	**983017**	**983018**	**€ 20.95**
2 m	**983511**	**983513**	**983515**	**€ 13.95**
3 m	**983516**	**983517**	**983518**	**€ 20.95**
2 m		**984013**	**984015**	**€ 13.95**
3 m		**984017**	**984018**	**€ 20.95**
2 m		**984513**	**984515**	**€ 13.95**
3 m		**984517**	**984518**	**€ 20.95**
2 m	**985011**			**€ 13.95**
3 m	**985016**			**€ 20.95**

end caps set | 2 pieces | Plastic | € 3.95

White	Grey	Black
978050	**978051**	**978052**
978550	**978551**	**978552**
979020	**979021**	**979022**
979520	**979521**	**979522**
980010	**980011**	**980012**

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 30.95**
987004	Set of 2 retaining clips for AU-10		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

AU-01-12

·for LED strips up to 13.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970041	Silver	Matt / Anodised	2000 mm	**€ 22.95**
970043	Black	Matt / Anodised	2000 mm	**€ 22.95**
970048	Silver	Matt / Anodised	3000 mm	**€ 33.95**
970045	White	Matt / Powder-coated	2000 mm	**€ 22.95**



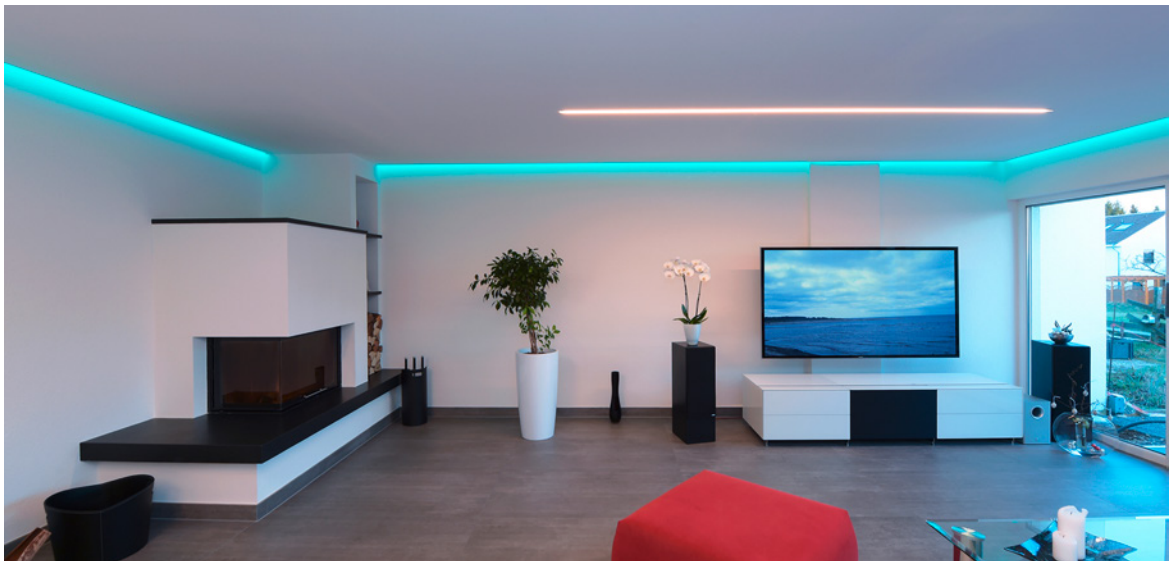

Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
1 m	**983020**	**983022**	**983024**	**€ 6.45**	**978020**	**978021**	**978022**
2 m	**983021**	**983023**	**983025**	**€ 13.95**			
3 m	**983028**	**983027**	**983026**	**€ 20.95**			
							
1 m	**983520**	**983522**	**983524**	**€ 6.45**	**978520**	**978521**	**978522**
2 m	**983521**	**983523**	**983525**	**€ 13.95**			
3 m	**983527**		**983526**	**€ 20.95**			
							
1 m		**984022**	**984024**	**€ 6.45**	**979010**	**979011**	**979012**
2 m		**984023**	**984025**	**€ 13.95**			
3 m			**984026**	**€ 20.95**			
							
1 m		**984522**	**984524**	**€ 6.45**	**979510**	**979511**	**979512**
2 m		**984523**	**984525**	**€ 13.95**			
3 m			**984526**	**€ 20.95**			

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 30.95**
987006	Set of 2 retaining clips for AU-12		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

AU-02-12

·for LED strips up to 13.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970141	Silver	Matt / Anodised	2000 mm	**€ 25.95**
970143	Black	Matt / Anodised	2000 mm	**€ 25.95**
970148	Silver	Matt / Anodised	3000 mm	**€ 35.95**
970145	White	Matt / Powder-coated	2000 mm	**€ 25.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
2 m	**983021**	**983023**	**983025**	**€ 13.95**
3 m	**983028**	**983027**	**983026**	**€ 20.95**
2 m	**983521**	**983523**	**983525**	**€ 13.95**
3 m	**983527**		**983526**	**€ 20.95**
2 m		**984023**	**984025**	**€ 13.95**
3 m			**984026**	**€ 20.95**
2 m		**984523**	**984525**	**€ 13.95**
3 m			**984526**	**€ 20.95**

end caps set | 2 pieces | Plastic | € 3.95

White	Grey	Black
978060	**978061**	**978062**
978560	**978561**	**978562**
979030	**979031**	**979032**
979530	**979531**	**979532**

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 30.95**
987006	Set of 2 retaining clips for AU-12		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

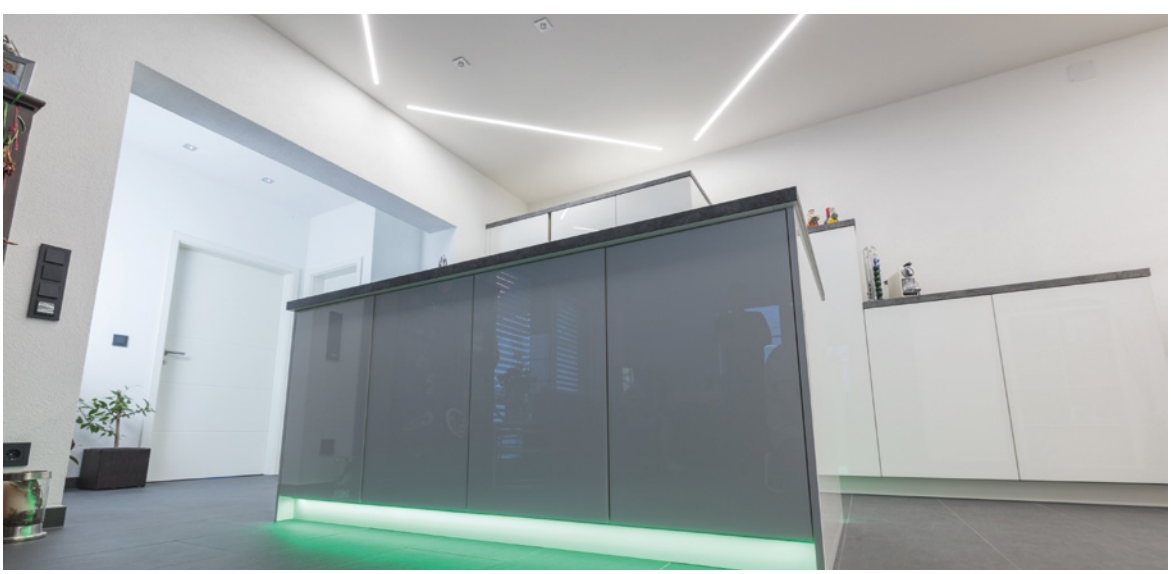

AU-01-15

·For LED strips up to 16.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970061	Silver	Matt / Anodised	2000 mm	**€ 22.95**
970063	Black	Matt / Anodised	2000 mm	**€ 22.95**
970068	Silver	Matt / Anodised	3000 mm	**€ 33.95**
970065	White	Matt / Powder-coated	2000 mm	**€ 22.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
2 m	**983031**	**983033**	**983035**	**€ 15.95**	**978030**	**978031**	**978032**
3 m	**983038**	**983037**	**983036**	**€ 22.95**			
							
2 m	**983531**	**983533**	**983535**	**€ 15.95**	**978530**	**978531**	**978532**
3 m		**983539**	**983536**	**€ 22.95**			
							
2 m		**984033**	**984035**	**€ 15.95**	**979090**	**979091**	**979092**
3 m			**984036**	**€ 22.95**			
							
2 m		**984533**	**984535**	**€ 15.95**	**979590**	**979591**	**979592**

930349	3M double-sided adhesive tape 50,000x20x0.20 mm		**€ 38.95**
987008	Set of 2 retaining clips for AU-15		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

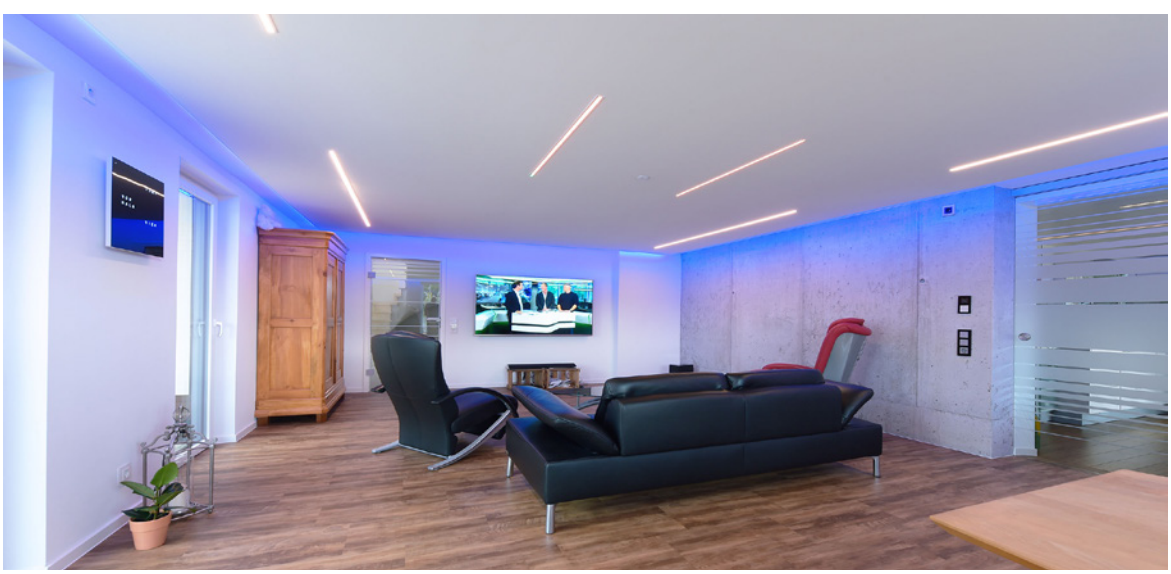

AU-02-15

·For LED strips up to 16.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970161	Silver	Matt / Anodised	2000 mm	**€ 25.95**
970163	Black	Matt / Anodised	2000 mm	**€ 25.95**
970168	Silver	Matt / Anodised	3000 mm	**€ 35.95**
970165	White	Matt / Powder-coated	2000 mm	**€ 25.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
2 m	**983031**	**983033**	**983035**	**€ 15.95**	**978070**	**978071**	**978072**
3 m	**983038**	**983037**	**983036**	**€ 22.95**			
							
2 m	**983531**	**983533**	**983535**	**€ 15.95**	**978570**	**978571**	**978572**
3 m		**983539**	**983536**	**€ 22.95**			
							
2 m		**984033**	**984035**	**€ 15.95**	**979110**	**979111**	**979112**
3 m			**984036**	**€ 22.95**			
2 m		**984533**	**984535**	**€ 15.95**	**979610**	**979611**	**979612**

930349	3M double-sided adhesive tape 50,000x20x0.20 mm		**€ 38.95**
987008	Set of 2 retaining clips for AU-15		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

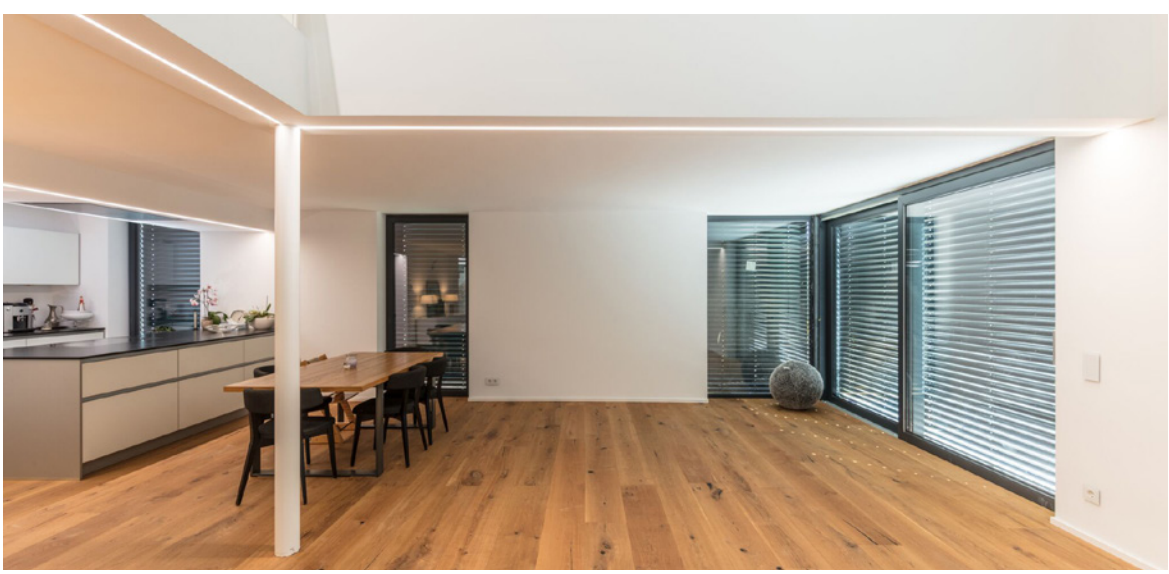

ET-01-08

·For LED strips up to 9.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975001	Silver	Matt / Anodised	**€ 21.95**
975003	Black	Matt / Anodised	**€ 21.95**
975005	White	Matt / Powder-coated	**€ 21.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
1 m	**983000**	**983002**	**983004**	**€ 6.45**	**978080**	**978081**	**978082**
2 m	**983001**	**983003**	**983005**	**€ 13.95**			
							
1 m	**983500**	**983502**	**983504**	**€ 6.45**	**978580**	**978581**	**978582**
2 m	**983501**	**983503**	**983505**	**€ 13.95**			
							
1 m		**984002**	**984004**	**€ 6.45**	**979120**	**979121**	**979122**
2 m		**984003**	**984005**	**€ 13.95**			
							
1 m		**984502**	**984504**	**€ 6.45**	**979620**	**979621**	**979622**
2 m		**984503**	**984505**	**€ 13.95**			

930347	3M double-sided adhesive tape 50,000x12x0.2 mm		**€ 25.95**
987002	Set of 2 retaining clips for AU-08		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

ET-02-08

·For LED strips up to 9.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975101	Silver	Matt / Anodised	**€ 25.95**
975103	Black	Matt / Anodised	**€ 25.95**
975105	White	Matt / Powder-coated	**€ 25.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983000**	**983002**	**983004**	**€ 6.45**
2 m	**983001**	**983003**	**983005**	**€ 13.95**
1 m	**983500**	**983502**	**983504**	**€ 6.45**
2 m	**983501**	**983503**	**983505**	**€ 13.95**
1 m		**984002**	**984004**	**€ 6.45**
2 m		**984003**	**984005**	**€ 13.95**
1 m		**984502**	**984504**	**€ 6.45**
2 m		**984503**	**984505**	**€ 13.95**

end caps set | 2 pieces | Plastic | € 3.95

	White	Grey	Black
	**978120**	**978121**	**978122**
	**978620**	**978621**	**978622**
	**979140**	**979141**	**979142**
		**979641**	

930347	3M double-sided adhesive tape 50,000x12x0.2 mm		**€ 25.95**
987002	Set of 2 retaining clips for AU-08		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

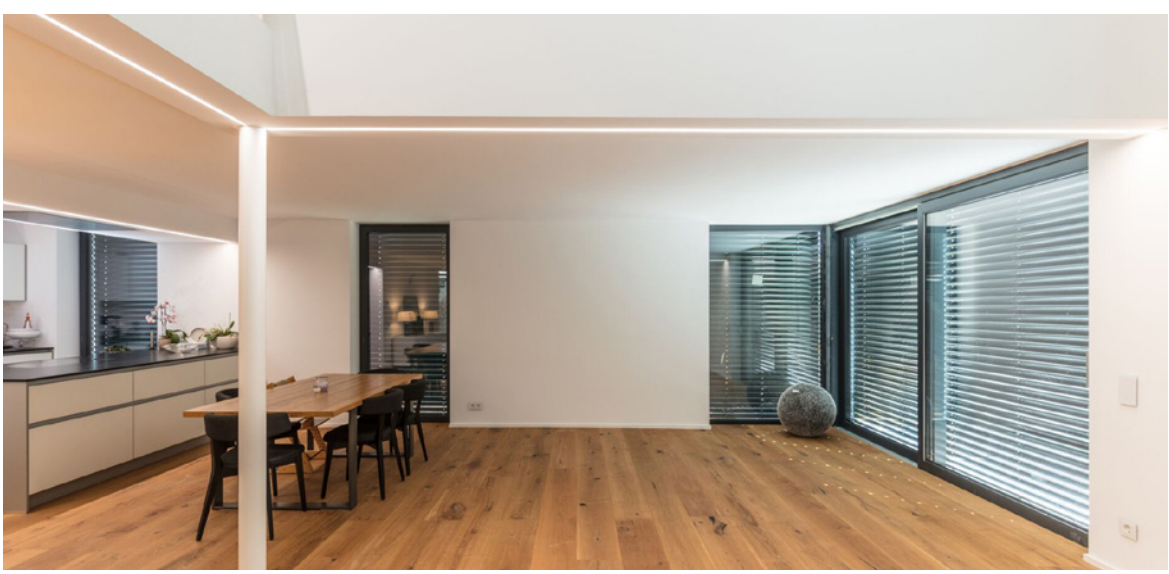

ET-01-10

·For LED strips up to 11.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975021	Silver	Matt / Anodised	**€ 21.95**
975023	Black	Matt / Anodised	**€ 21.95**
975025	White	Matt / Powder-coated	**€ 21.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic

	Clear	Matt	Milky		White	Grey	Black	
								
1 m	**983010**	**983012**	**983014**	**€ 6.45**	**978090**	**978091**	**978092**	**€ 3.95**
2 m	**983011**	**983013**	**983015**	**€ 13.95**				
								
1 m	**983510**	**983512**	**983514**	**€ 6.45**	**978590**	**978591**	**978592**	**€ 3.95**
2 m	**983511**	**983513**	**983515**	**€ 13.95**				
								
1 m		**984012**	**984014**	**€ 6.45**	**979040**	**979041**	**979042**	**€ 3.95**
2 m		**984013**	**984015**	**€ 13.95**				
								
1 m		**984512**	**984514**	**€ 6.45**	**979540**		**979542**	**€ 3.95**
2 m		**984513**	**984515**	**€ 13.95**				
								
1 m	**985010**			**€ 6.45**	**980040**	**980041**	**980042**	**€ 3.95**
2 m	**985011**			**€ 13.95**				

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 30.95**
987004	Set of 2 retaining clips for AU-10		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

ET-02-10

· For LED strips up to 11.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975121	Silver	Matt / Anodised	**€ 25.95**
975123	Black	Matt / Anodised	**€ 25.95**
975125	White	Matt / Powder-coated	**€ 25.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
1 m	**983010**	**983012**	**983014**	**€ 6.45**	**978130**	**978131**	**978132**
2 m	**983011**	**983013**	**983015**	**€ 13.95**			
							
1 m	**983510**	**983512**	**983514**	**€ 6.45**	**978630**	**978631**	**978632**
2 m	**983511**	**983513**	**983515**	**€ 13.95**			
							
1 m		**984012**	**984014**	**€ 6.45**	**979060**	**979061**	**979062**
2 m		**984013**	**984015**	**€ 13.95**			
							
1 m		**984512**	**984514**	**€ 6.45**	**979560**	**979561**	**979562**
2 m		**984513**	**984515**	**€ 13.95**			
							
1 m	**985010**			**€ 6.45**	**980060**	**980061**	
2 m	**985011**			**€ 13.95**			

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 30.95**
987004	Set of 2 retaining clips for AU-10		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

NEW

ET-01-12

·For LED strips up to 13.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975041	Silver	Matt / Anodised	**€ 25.95**
975049	Black	Matt / Anodised	**€ 25.95**
975045	White	Matt / Powder-coated	**€ 25.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
1 m	**983020**	**983022**	**983024**	**€ 6.45**	**978100**	**978101**	**978102**
2 m	**983021**	**983023**	**983025**	**€ 13.95**			
							
1 m	**983520**	**983522**	**983524**	**€ 6.45**	**978600**	**978601**	**978602**
2 m	**983521**	**983523**	**983525**	**€ 13.95**			
							
1 m		**984022**	**984024**	**€ 6.45**	**979050**	**979051**	**979052**
2 m		**984023**	**984025**	**€ 13.95**			
							
1 m		**984522**	**984524**	**€ 6.45**	**979550**	**979551**	**979552**
2 m		**984523**	**984525**	**€ 13.95**			

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 30.95**
987006	Set of 2 retaining clips for AU-12		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

ET-02-12

·For LED strips up to 13.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975141	Silver	Matt / Anodised	**€ 28.95**
975143	Black	Matt / Anodised	**€ 28.95**
975145	White	Matt / Powder-coated	**€ 28.95**



Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic | € 3.95

	Clear	Matt	Milky		White	Grey	Black
							
1 m	**983020**	**983022**	**983024**	**€ 6.45**	**978140**	**978141**	**978142**
2 m	**983021**	**983023**	**983025**	**€ 13.95**			
							
1 m	**983520**	**983522**	**983524**	**€ 6.45**	**978640**	**978641**	**978642**
2 m	**983521**	**983523**	**983525**	**€ 13.95**			
							
1 m		**984022**	**984024**	**€ 6.45**	**979070**	**979071**	**979072**
2 m		**984023**	**984025**	**€ 13.95**			
							
1 m		**984522**	**984524**	**€ 6.45**		**979571**	**979572**
2 m		**984523**	**984525**	**€ 13.95**			

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 30.95**
987006	Set of 2 retaining clips for AU-12		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**



ET-02-15

·For LED strips up to 16.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975161	Silver	Matt / Anodised	**€ 28.95**
975163	Black	Matt / Anodised	**€ 28.95**
975165	White	Matt / Powder-coated	**€ 28.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983030**	**983032**	**983034**	**€ 7.95**
2 m	**983031**	**983033**	**983035**	**€ 15.95**
1 m	**983530**	**983532**	**983534**	**€ 7.95**
2 m	**983531**	**983533**	**983535**	**€ 15.95**
1 m		**984032**	**984034**	**€ 7.95**
2 m		**984033**	**984035**	**€ 15.95**
1 m		**984532**	**984534**	**€ 7.95**
2 m		**984533**	**984535**	**€ 15.95**

end caps set | 2 pieces | Plastic | € 3.95

	White	Grey	Black
	**978150**	**978151**	**978152**
	**978650**	**978651**	**978652**
	**979150**	**979151**	**979152**
	**979650**	**979651**	**979652**

930349	3M double-sided adhesive tape 50,000x20x0.20 mm		**€ 38.95**
987008	Set of 2 retaining clips for AU-15		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

H- AND GROOVE-PROFILES

Groove and H-profiles are offered with a comprehensive range of mounting accessories and are hard to beat in terms of versatility. The range of accessories includes cable suspensions, tension springs, sliding blocks and much more.

AU-10-12

·For LED strips up to 13 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970280	Silver	Matt / Anodised	2000 mm	**€ 28.95**
970281	Silver	Matt / Anodised	3000 mm	**€ 43.95**
970284	White	Matt / Powder-coated	2000 mm	**€ 28.95**
970285	White	Matt / Powder-coated	3000 mm	**€ 43.95**



Cover | Polycarbonate

	Clear	Milky	Black	
2 m	**983096**	**983090**	**983093**	**€ 18.95**
3 m	**983097**	**983091**	**983094**	**€ 28.95**
20 m	**983098**	**983092**		**€ 159.95**

end caps set | Aluminium | € 15.95

Silver

980021



980023	Mounting clip, set (2 pieces)	**€ 3.95**
987025	Sliding block/longitudinal connector	**€ 7.95**
987026	Sliding block/corner connector 120°	**€ 7.95**
987027	Sliding block/corner connector 90°	**€ 7.95**

Accessories for **970280**, **970281**

980020	end caps set aluminium 2 pieces	**19,95 €**
980021	end caps set aluminium 2 pieces	**19,95 €**

980020

980021

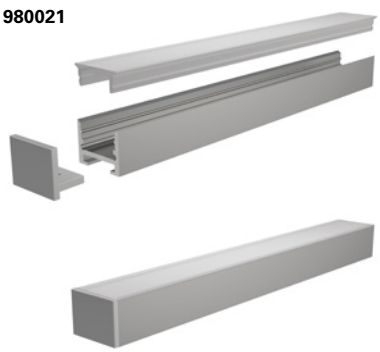

With the kind support of Albtherme Waldbronn / Ziegler Technics buero@ziegler-technics.de

STEP-, SOCKET-, ANGLE-, CORNER-PROFILES

The perfect light is not always planned from the very planned from the start. With the mounting and corner profiles, you can also integrate linear light at a later stage.

AL-01-10

·For LED strips up to 11.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970503	Silver	2000 mm	**€ 47.95**
970502	Silver	3000 mm	**€ 75.95**

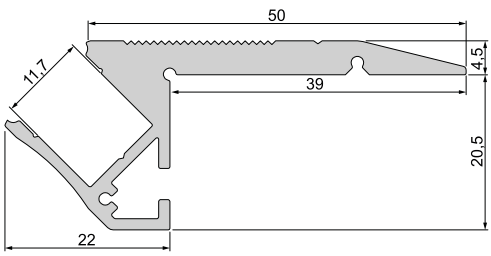

Cover | PMMA - Polymethyl methacrylate
Cover | Polycarbonate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 6.45**
1 m			**983080**	**€ 8.95**
2 m	**983011**	**983013**	**983015**	**€ 13.95**
2 m			**983081**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 20.95**
3 m			**983082**	**€ 25.95**

end caps set | 2 pieces (left/right) | Plastic | € 3.95

Grey



978191

930105 Assembly adhesive 310 ml

€ 28.95

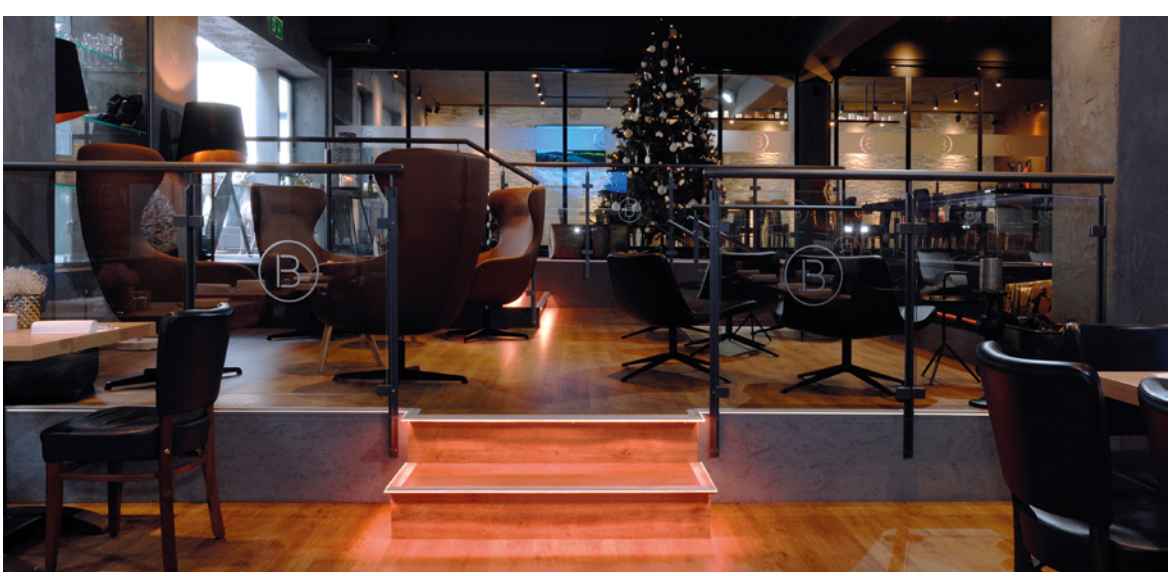

AL-02-10

·For LED strips up to 11.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970523	Silver	2000 mm	**€ 47.95**
970522	Silver	3000 mm	**€ 75.95**

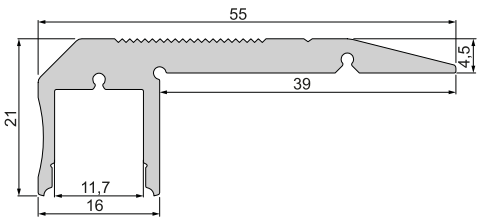



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 6.45**
2 m	**983011**	**983013**	**983015**	**€ 13.95**
3 m	**983016**	**983017**	**983018**	**€ 20.95**

end caps set | 2 pieces (left/right) | Plastic | € 3.95

Grey



978201

930105 Assembly adhesive 310 ml

€ 28.95

AV-01-20

·For LED strips up to 22 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
970460	Silver	**€ 28.95**

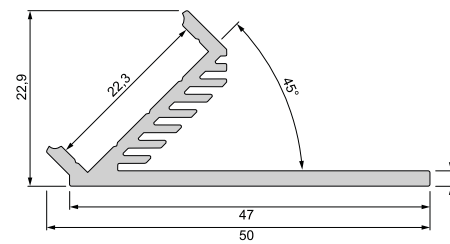

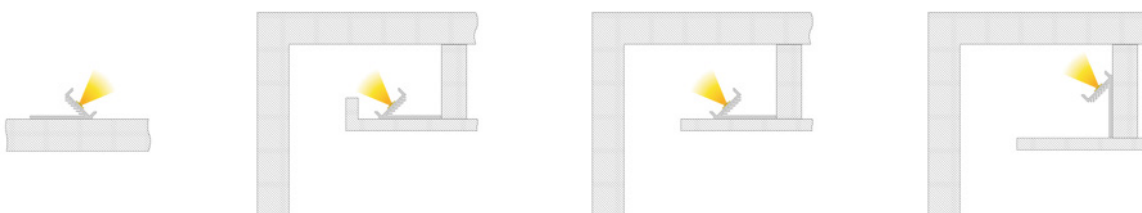

Cover | PMMA - Polymethyl methacrylate

	Clear	Milky	
1 m	**983040**	**983044**	**€ 8.95**
2 m	**983041**	**983045**	**€ 17.95**
3 m		**983046**	**€ 25.95**
1 m		**984044**	**€ 8.95**
2 m		**984045**	**€ 17.95**
1 m		**984544**	**€ 8.95**
2 m		**984545**	**€ 17.95**







930105 Assembly adhesive 310 ml **€ 28.95**

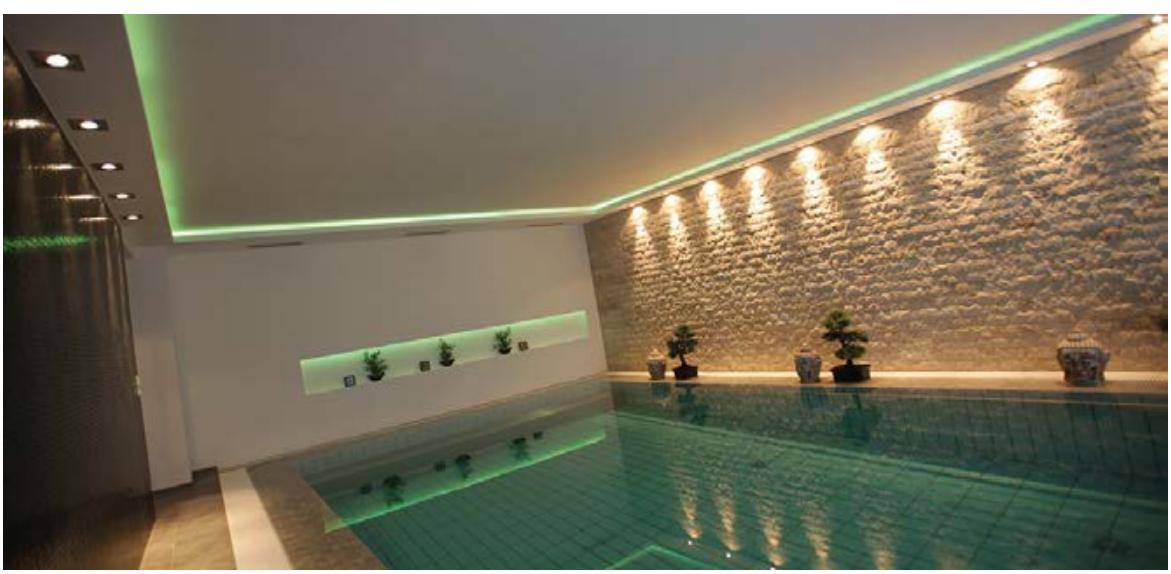

AV-02-20

·For LED strips up to 22 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
970470	Silver	**€ 28.95**

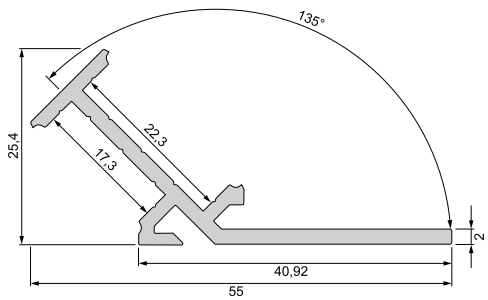







Foto: Daniel Vieser . Architekturfotografie . Karlsruhe

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983040**		**983044**	**€ 8.95**
2 m	**983041**		**983045**	**€ 17.95**
3 m			**983046**	**€ 25.95**
3 m		**983539**		**€ 22.95**
1 m			**984044**	**€ 8.95**
2 m			**984045**	**€ 17.95**
1 m			**984544**	**€ 8.95**
2 m			**984545**	**€ 17.95**









930105 Assembly adhesive 310 ml **€ 28.95**

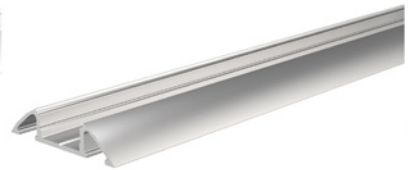

AM-01-10

·For LED strips up to 11.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
970301	Silver	Matt / Anodised	**€ 29.95**
970303	Black	Matt / Anodised	**€ 29.95**
970305	White	Matt / Powder-coated	**€ 29.95**





Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 6.45**
2 m	**983011**	**983013**	**983015**	**€ 13.95**

	Clear	Matt	Milky	
1 m	**983510**	**983512**	**983514**	**€ 6.45**
2 m	**983511**	**983513**	**983515**	**€ 13.95**
3 m	**983516**	**983517**	**983518**	**€ 20.95**

end caps set | 2 pieces | Plastic | € 3.95



White	Grey	Black
978700	**978701**	**978702**

930105 Assembly adhesive 310 ml

€ 28.95

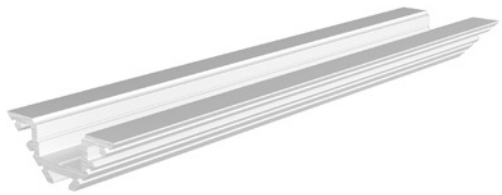

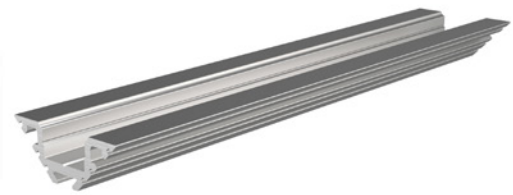

AV-01-10

·For LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970401	Silver	Matt / Anodised	2000 mm	**€ 28.95**
970404	Silver	Matt / Anodised	3000 mm	**€ 43.95**
970403	White	Matt / Powder-coated	2000 mm	**€ 28.95**



Foto: Daniel Vieser - Architekturfotografie, Karlsruhe

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 6.45**
2 m	**983011**	**983013**	**983015**	**€ 13.95**
3 m	**983016**	**983017**	**983018**	**€ 20.95**

1 m	**983510**	**983512**	**983514**	**€ 6.45**
2 m	**983511**	**983513**	**983515**	**€ 13.95**
3 m	**983516**	**983517**	**983518**	**€ 20.95**

1 m		**984012**	**984014**	**€ 6.45**
2 m		**984013**	**984015**	**€ 13.95**
3 m		**984017**	**984018**	**€ 20.95**

1 m		**984512**	**984514**	**€ 6.45**
2 m		**984513**	**984515**	**€ 13.95**
3 m		**984517**	**984518**	**€ 20.95**

1 m	**985010**			**€ 6.45**
2 m	**985011**			**€ 13.95**
3 m	**985016**			**€ 20.95**

end caps set | 2 pieces | Plastic | € 3.95



White	Grey
978170	**978171**

930105 Assembly adhesive 310 ml **€ 28.95**

930348 3M double-sided adhesive tape 50,000x15x0.20 mm **€ 30.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

EV-04-12

·For LED strips up to 13.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
975411	Silver	2000 mm	**€ 31.95**
975412	Silver	3000 mm	**€ 49.95**



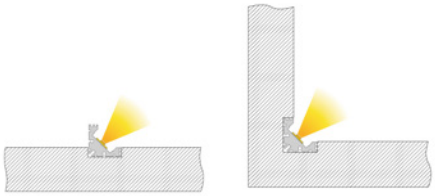

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 6.45**
2 m	**983021**	**983023**	**983025**	**€ 13.95**
3 m	**983028**	**983027**	**983026**	**€ 20.95**
1 m	**983520**	**983522**	**983524**	**€ 6.45**
2 m	**983521**	**983523**	**983525**	**€ 13.95**
3 m	**983527**		**983526**	**€ 20.95**
1 m		**984022**	**984024**	**€ 6.45**
2 m		**984023**	**984025**	**€ 13.95**
3 m			**984026**	**€ 20.95**
1 m		**984522**	**984524**	**€ 6.45**
2 m		**984523**	**984525**	**€ 13.95**
3 m			**984526**	**€ 20.95**

end caps set | Plastic | € 3.95

Grey



978341







930105	Assembly adhesive 310 ml		**€ 28.95**
987006	Set of 2 retaining clips for AU-12		**€ 3.45**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 18.95**

AV-05-12

- **For LED strips up to 12 mm wide**

Housing	Aluminium
Surface	Matt, Anodised



Article	Housing Color	Length	Price
970550	Silver	2000 mm	**€ 31.95**
970551	Silver	3000 mm	**€ 47.95**

Cover | Polycarbonate

Milky

2 m	**983100**	**€ 18.95**
3 m	**983101**	**€ 28.95**

2 m	**984570**	**€ 18.95**
3 m	**984571**	**€ 28.95**

2 m	**985570**	**€ 18.95**
3 m	**985571**	**€ 28.95**

end caps set | 2 pieces
1x installation material | Aluminium | € 26.95

Silver



978370



979760

980550

AV-05-15

·For LED strips up to 15 mm wide

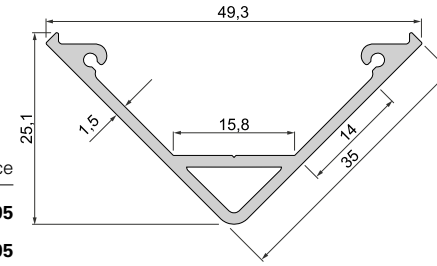

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970560	Silver	2000 mm	**€ 39.95**
970561	Silver	3000 mm	**€ 63.95**

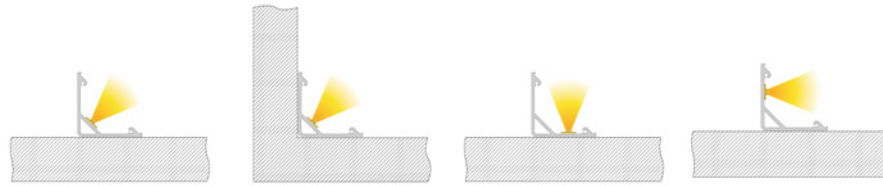

Cover | Polycarbonate

Milky

2 m	**983110**	**€ 24.95**
3 m	**983111**	**€ 35.95**

2 m	**984580**	**€ 24.95**
3 m	**984581**	**€ 35.95**

2 m	**985580**	**€ 24.95**
3 m	**985581**	**€ 35.95**

end caps set | 2 pieces
1x installation material | Aluminium | € 26.95

Silver



978380



979770

980560

AV-05-25

·For LED strips up to 25 mm wide or two 12 mm wide

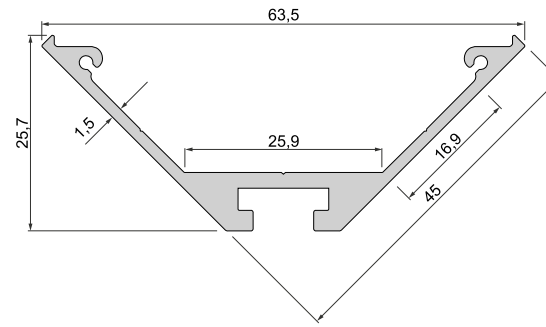

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970570	Silver	2000 mm	**€ 55.95**
970571	Silver	3000 mm	**€ 79.95**

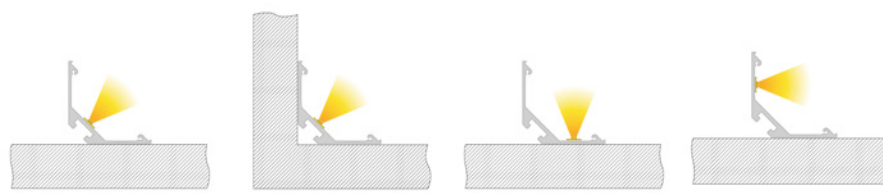

Cover | Polycarbonate

Milky

2 m	**983120**	**€ 28.95**
3 m	**983121**	**€ 43.95**

2 m	**984590**	**€ 28.95**
3 m	**984591**	**€ 43.95**

2 m	**985590**	**€ 28.95**
3 m	**985591**	**€ 43.95**

end caps set | 2 pieces
1x installation material | Aluminium | € 26.95

Silver



978390



979780

980570

Accessories

987020	Universal sliding block/longitudinal connector, set of 2 pieces		**€ 7.95**
987060	Cable suspension (swivel), set of 2 pieces		**€ 35.95**

Foto: Daniel Vieser . Architekturfotografie, Karlsruhe

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

DRY CONSTRUCTION PROFILES

Our dry construction profiles offer you full creative freedom. Redefine linear light – whether as a primary light or for accent lighting.

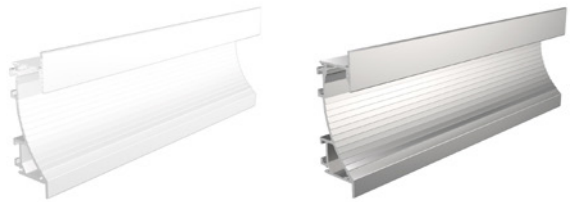

EL-02-12

- **For LED strips up to 14 mm wide**

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975491	Silver	Matt / Anodised	**€ 65.95**
975495	White	Matt / Powder-coated	**€ 65.95**

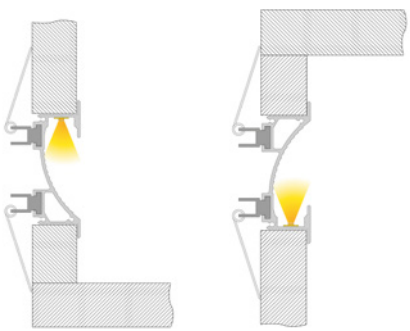

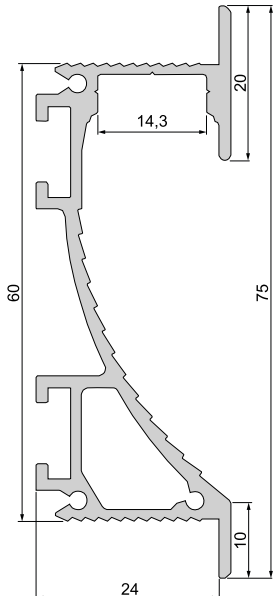

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 6.45**
2 m	**983021**	**983023**	**983025**	**€ 13.95**

end caps set | 2 pieces (left/right)
1x installation material | Plastic

end caps set | 2 pieces (left/right)
1x installation material | Aluminium

	White	Grey	
1 m	**978250**	**978251**	**€ 3.95**
2 m		**978252**	**€ 26.95**

930105	Assembly adhesive 310 ml		**€ 28.95**
930346	3M double-sided adhesive tape 50,000x10x0.2 mm		**€ 23.95**
987020	Universal sliding block/longitudinal connector, set of 2 pieces		**€ 6.45**
987040	Sliding block with tensioning springs, set of 2 pieces		**€ 6.45**

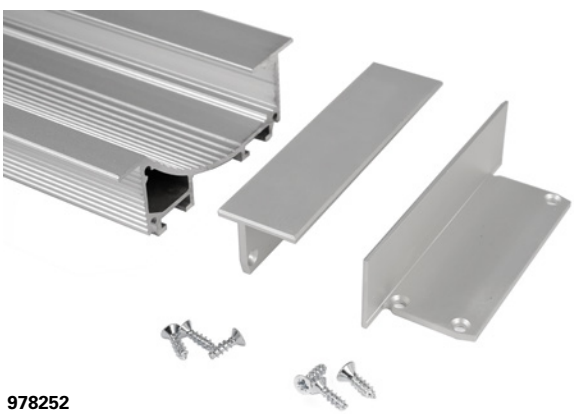

978252

ET-03-10

- **For LED strips up to 12 mm wide**

Housing	Aluminium
Length	2500 mm

Article	Housing Color	Surface	Price
975471	Silver	Matt / Anodised	**€ 47.95**
975475	White	Matt / Powder-coated	**€ 47.95**



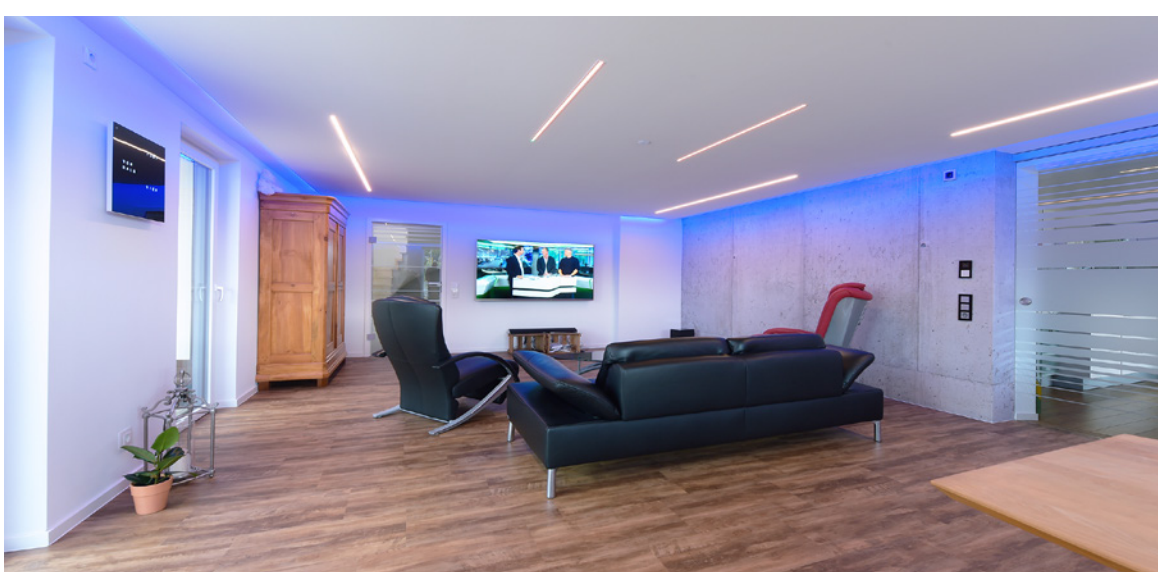

Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces | Plastic

	Clear	Matt	Milky		White	Grey	
							
1 m	**983010**	**983012**	**983014**	**€ 6.45**	**978260**	**978261**	**€ 3.95**
2 m	**983011**	**983013**	**983015**	**€ 13.95**			
3 m	**983016**	**983017**	**983018**	**€ 20.95**			
							
1 m		**984012**	**984014**	**€ 6.45**	**979200**	**979201**	**€ 5.95**
2 m		**984013**	**984015**	**€ 13.95**			
3 m		**984017**	**984018**	**€ 20.95**			
							
1 m		**984512**	**984514**	**€ 6.45**	**979700**	**979701**	**€ 5.95**
2 m		**984513**	**984515**	**€ 13.95**			
3 m		**984517**	**984518**	**€ 20.95**			

930105	Assembly adhesive 310 ml		**€ 28.95**
970762	Support profile, LED support T-01-10		**€ 6.45**
987020	Universal sliding block/longitudinal connector, set of 2 pieces		**€ 6.45**
987040	Sliding block with tensioning springs, set of 2 pieces		**€ 6.45**

EL-03-10

- **For LED strips up to 12 mm wide**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975483	Silver	Matt / Anodised	2000 mm	**€ 47.95**
975485	White	Matt / Powder-coated	2500 mm	**€ 63.95**

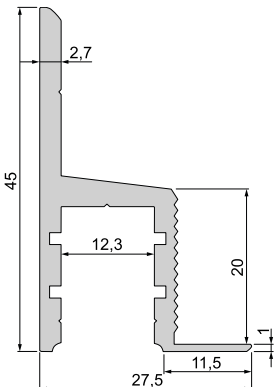



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 6.45**
2 m	**983011**	**983013**	**983015**	**€ 13.95**
3 m	**983016**	**983017**	**983018**	**€ 20.95**
1 m		**984012**	**984014**	**€ 6.45**
2 m		**984013**	**984015**	**€ 13.95**
3 m		**984017**	**984018**	**€ 20.95**
1 m		**984512**	**984514**	**€ 6.45**
2 m		**984513**	**984515**	**€ 13.95**
3 m		**984517**	**984518**	**€ 20.95**

end caps set | 2 pieces (left/right) | Plastic

White	Grey	
978270	**978271**	**€ 3.95**
979210	**979211**	**€ 5.95**
979710	**979711**	**€ 5.95**

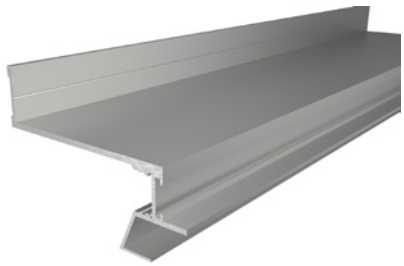

EL-04-12

- **for LED strips up to 14 mm wide**
- **for plasterboard 12.5 mm thick**

Housing	Aluminium
Surface	Natural
Length	3000 mm

Article	Housing Color	Price
975530	Silver	**€ 79.95**

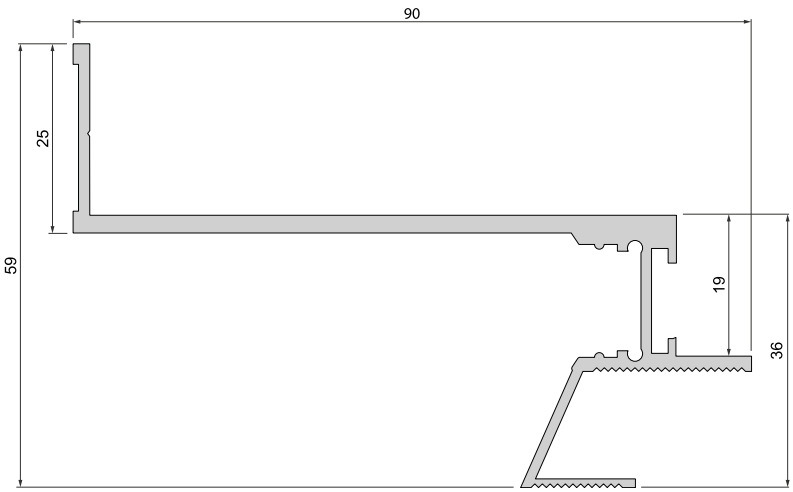



Cover | Polycarbonate
Milky

2 m	**983090**	**€ 18.95**
3 m	**983091**	**€ 28.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

Foto: Daniel Vieser · Architekturfotografie · Karlsruhe

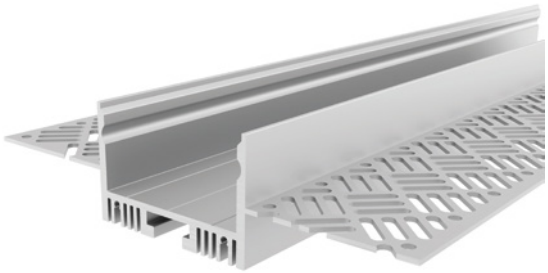

EU-01-36

- **For LED strips up to 36 mm wide**

Housing	Aluminium
Surface	Natural
Length	3000 mm

Article	Housing Color	Price
975501	Silver	**€ 99.95**

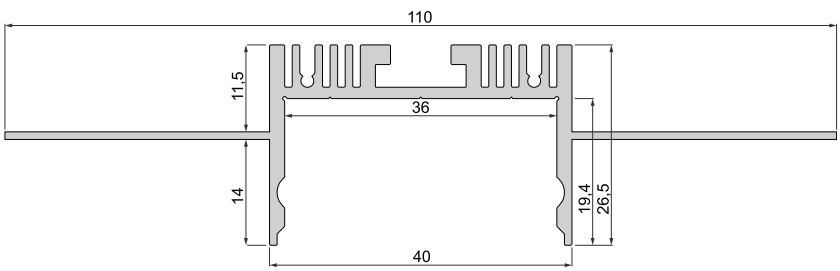

Cover | PMMA - Polymethyl methacrylate

Milky

3 m **985601** **€ 33.95**

end caps set | 2 pieces
1x installation material | Aluminium | € 15.95

Grey



978175 **€ 15.95**

985605 Dummy cover

€ 24.95

B

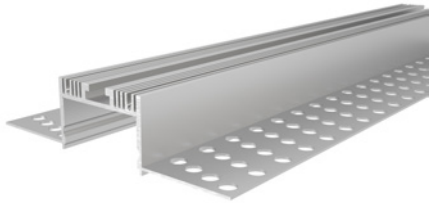

EU-02-36

- **For LED strips up to 36 mm wide**

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975525	Silver	**€ 103.95**

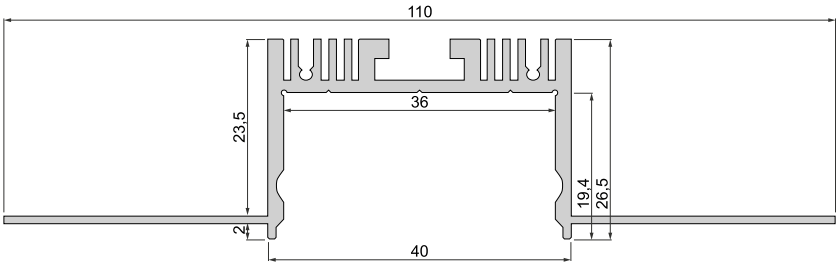



Cover | PMMA - Polymethyl methacrylate
Milky

3 m	**985601**	**€ 33.95**

985605 Dummy cover **€ 24.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

EU-10-12

- **For LED strips up to 12 mm wide**

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975511	Silver	**€ 47.95**

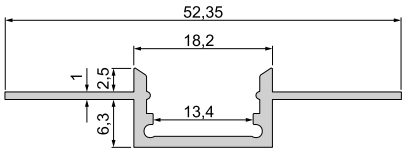



Cover | Polycarbonate
Milky

2 m	**983090**	**€ 18.95**
3 m	**983091**	**€ 28.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

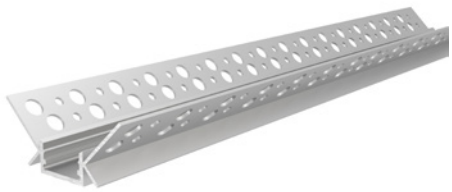

EV-11-12

- **For LED strips up to 12 mm wide**

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975516	Silver	**€ 55.95**

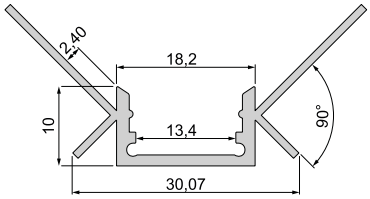



Cover | Polycarbonate
Milky

2 m	**983090**	**€ 18.95**
3 m	**983091**	**€ 28.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

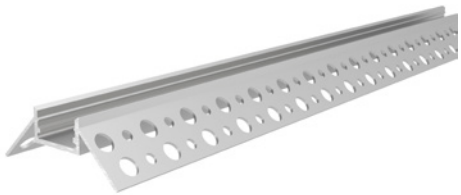

EV-12-12

- **For LED strips up to 12 mm wide**

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975521	Silver	**€ 47.95**

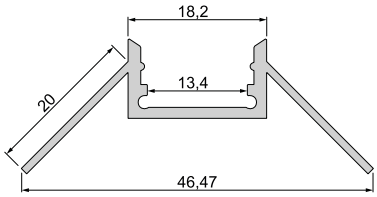



Cover | Polycarbonate
Milky

2 m	**983090**	**€ 18.95**
3 m	**983091**	**€ 28.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

TILE PROFILES

Tile profiles play to every corner and closing area. Do away with conventional tile end profiles and set a new standard with linear light.

EL-03-12

- **For LED strips up to 13.3 mm wide**
- **For tile thicknesses up to max. 12 mm**

Housing	Aluminium
Length	2500 mm

Article	Housing Color	Surface	Price
975361	Silver	Matt / Anodised	**€ 47.95**
975365	White	Matt / Powder-coated	**€ 47.95**

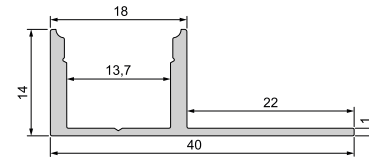

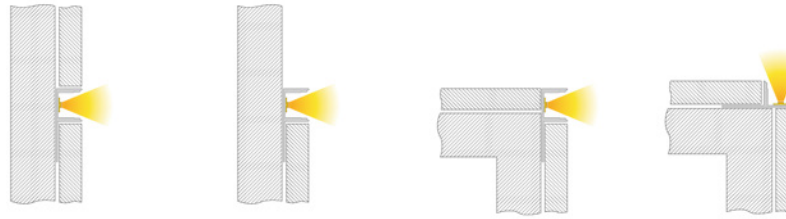

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 6.45**
2 m	**983021**			**€ 13.95**
3 m	**983028**	**983027**	**983026**	**€ 20.95**

1 m		**984022**	**984024**	**€ 6.45**
3 m			**984026**	**€ 20.95**

EV-01-12

- **For LED strips up to 13.3 mm wide**
- **For tile thicknesses up to max. 12 mm**

Housing	Aluminium
Length	2500 mm

Article	Housing Color	Surface	Price
975371	Silver	Matt / Anodised	**€ 79.95**
975375	White	Matt / Powder-coated	**€ 79.95**

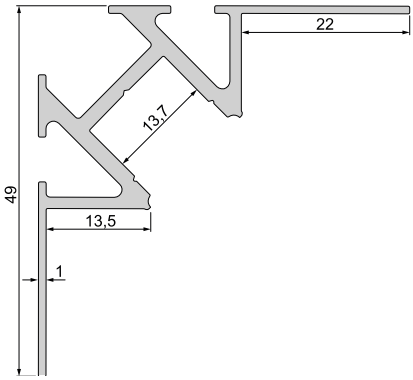



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 6.45**
2 m	**983021**	**983023**	**983025**	**€ 13.95**
3 m	**983028**	**983027**	**983026**	**€ 20.95**

EV-02-12

- **For LED strips up to 13.3 mm wide**
- **For tile thicknesses up to max. 12 mm**

Housing	Aluminium
Length	2500 mm

Article	Housing Color	Surface	Price
975381	Silver	Matt / Anodised	**€ 79.95**
975385	White	Matt / Powder-coated	**€ 79.95**

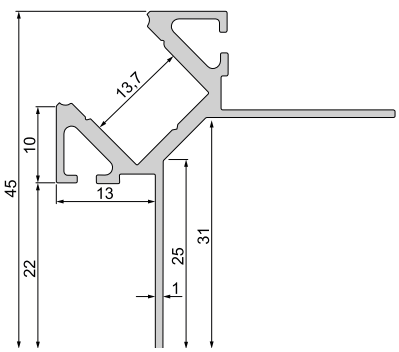



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 6.45**
2 m	**983021**	**983023**	**983025**	**€ 13.95**
3 m	**983028**	**983027**	**983026**	**€ 20.95**

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

PROFILES FOR OUTDOOR USE

Outdoor areas have different requirements than indoor areas. Our IP profiles are walkable and passable and inspire as a highlight in any outdoor design.

AU-05-15

·For LED strips up to 15.6 mm wide

Housing	Aluminium
Surface	Natural
Length	2000 mm

Article	Housing Color	Price
970741	Silver	**€ 33.95**



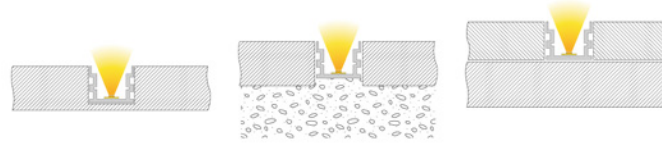

Cover | PMMA - Polymethyl methacrylate

Milky

1 m	**988084**	**€ 8.95**
2 m	**988085**	**€ 17.95**

end caps set | 2 pieces (left/right) | Plastic | € 3.95

Grey

981031 **€ 3.95**

930104 Natural stone sealant 310 ml

€ 31.95

970764 Support profile, LED support T-01-15

€ 6.45

Foto: Daniel Vieser, Architekturfotografie, Karlsruhe

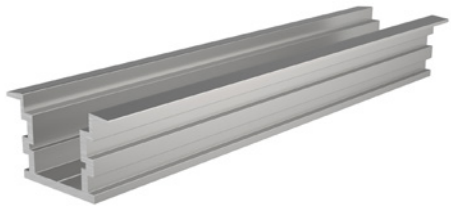

ET-05-15

·For LED strips up to 15.6 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
975741	Silver	**€ 33.95**



Cover | PMMA - Polymethyl methacrylate

Milky

1 m	**988084**	**€ 8.95**
2 m	**988085**	**€ 17.95**

end caps set | 2 pieces (left/right) | Plastic | € 3.95

Grey



981041 **€ 3.95**

930104 Natural stone sealant 310 ml

€ 31.95

970764 Support profile, LED support T-01-15

€ 6.45

EU-01-12

·For LED strips up to 12 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
975781	Silver	**€ 63.95**



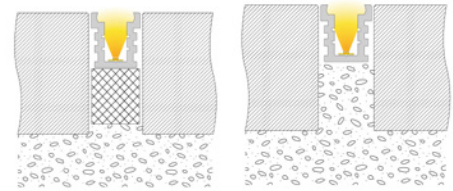

Cover | PMMA - Polymethyl methacrylate

Milky

1 m	**988054**	**€ 8.95**
2 m	**988055**	**€ 17.95**

end caps set | 2 pieces (left/right) | Plastic | € 3.95

Grey

981021	**€ 3.95**

930104	Natural stone sealant 310 ml		**€ 31.95**
970762	Support profile, LED support T-01-10		**€ 6.45**
990109	Foam underlay		**€ 6.45**

LED STRIPES

724 Quickfinder
728 COB
744 12V
746 24V
770 48V
784 230V
786 Mounting material for LED strips

led stripes

page 729

page 732

page 734

page 745

page 747

page 748

page 750

page 751

width in mm	Voltage [DC]	W/m	design	light colour	colour temperature	lm / m	LED / m	length in mm	protection rating	article number	page
4,0	24V	11,0	SMD	WW	2700 K	995	280	5000	IP20	**840175**	776
4,0	24V	11,0	SMD	WW	3000 K	1090	209	5000	IP20	**840210**	749
4,0	24V	11,5	SMD	NW	4000 K	1100	209	5000	IP20	**840267**	749
5,0	24V	9,6	SMD	WW	2700 K	770	120	5000	IP20	**840158**	748
5,0	24V	9,6	SMD	WW	3000 K	820	120	5000	IP20	**840159**	748
5,0	24V	11,0	SMD	WW CW	3000-6500 K	1025	196	5000	IP20	**840350**	750
5,0	24V	11,0	SMD	RGB		500	120	5000	IP20	**840276**	752
6,0	48V	4,0	SMD	WW	3000 K	400	520	15000	IP20	**840317**	783
7,4	24V	12,5	SMD	WW CW	3000-6500 K	1070	196	5000	IP65	**840349**	751
8,0	12V	7,0	SMD	WW	2700 K	570	120	5000	IP20	**840164**	745
8,0	12V	7,0	SMD	WW	3000 K	555	120	5000	IP20	**840165**	745
8,0	12V	7,0	SMD	NW	4000 K	670	120	5000	IP20	**840166**	745
8,0	12V	7,0	SMD	CW	6500 K	630	120	5000	IP20	**840167**	745
8,0	24V	14,0	SMD	WW	2700 K	1110	120	5000	IP20	**840178**	756
8,0	24V	14,0	SMD	WW	3000 K	1100	120	5000	IP20	**840179**	756
8,0	24V	14,0	SMD	NW	4000 K	1220	60	5000	IP20	**840180**	756
8,0	24V	14,0	SMD	WW	3000 K	1100	120	50000	IP20	**930512**	756
10,0	24V	8,0	Neon, 3D Bend	WW	2700 K	720	160	5000	IP67	**840417**	769
10,0	24V	8,0	Neon, 3D Bend	WW	3000 K	744	160	5000	IP67	**840418**	769
10,0	24V	8,0	Neon, 3D Bend	NW	4000 K	800	160	5000	IP67	**840419**	769
10,0	24V	9,5	SMD	WW	3000 K	705	120	10000	IP20	**840291**	747
10,0	24V	12,0	COB	WW	2700 K	1050	480	5000	IP20	**840474**	736
10,0	24V	12,0	COB	WW	3000 K	1360	480	5000	IP20	**840475**	736
10,0	24V	12,0	COB	NW	4000 K	1320	480	5000	IP20	**840476**	736
10,0	24V	13,0	SMD	RGB		580	60	5000	IP20	**840254**	754
10,0	24V	14,0	SMD	RGB		665	120	5000	IP20	**840147**	756
10,0	24V	15,0	COB	WW	2700 K	2100	288	5000	IP20	**840466**	742
10,0	24V	15,0	COB	WW	3000 K	2550	288	5000	IP20	**840467**	742
10,0	24V	15,0	COB	NW	4000 K	2690	288	5000	IP20	**840468**	742
10,0	24V	15,0	COB	CW	6500 K	2690	288	5000	IP20	**840469**	742
10,0	24V	15,0	SMD	WW CW	2700-6500 K	1550		5000	IP20	**840480**	738
10,0	24V	16,0	SMD	RGB WW	3000 K	820	60	5000	IP20	**840236**	759
10,0	24V	16,0	SMD	RGB NW	4000 K	765	60	5000	IP44	**840373**	760
10,0	24V	16,0	SMD	WW	3000 K	820	60	50000	IP20	**930517**	759
10,0	24V	16,5	SMD	RGB NW	4000 K	775	60	5000	IP20	**840353**	758
10,0	24V	17,2	SMD	WW CW	2700-6500 K	1765	140	5000	IP20	**840378**	761
10,0	24V	18,5	SMD	WW	2700 K	1215	240	5000	IP20	**840192**	762
10,0	24V	19,0	SMD	WW	3000 K	1605	240	5000	IP20	**840193**	762
10,0	24V	20,0	SMD	CW	6000 K	1720	120	5000	IP20	**840124**	762
10,0	24V	20,0	SMD	NW	4000 K	1770	240	5000	IP20	**840194**	762
10,0	24V	23,0	SMD	WW	3000 K	2650	160	5000	IP44	**840333**	764
10,0	24V	23,0	SMD	NW	4000 K	2780	160	5000	IP44	**840334**	764

width in mm	Voltage [DC]	W/m	design	light colour	colour temperature	lm / m	LED / m	length in mm	protection rating	article number	page
10,0	24V	23,0	SMD	WW	3000 K	3010	160	5000	IP20	**840331**	763
10,0	24V	23,0	SMD	NW	4000 K	3130	160	5000	IP20	**840332**	763
10,0	48V	4,0	SMD	WW	3000 K	485	520	15000	IP20	**840318**	782
10,0	48V	4,0	SMD	WW	3000 K	485	130	50000	IP20	**840337**	782
10,0	48V	4,0	SMD	NW	4000 K	530	520	15000	IP20	**840320**	782
10,0	48V	4,0	SMD	NW	4000 K	530	130	50000	IP20	**840339**	782
10,0	48V	4,0	SMD	WW	3000 K	400	130	50000	IP44	**840338**	783
10,0	48V	4,0	SMD	NW	4000 K	455	520	15000	IP44	**840319**	783
10,0	48V	4,0	SMD	NW	4000 K	455	130	50000	IP44	**840340**	783
10,0	48V	10,0	SMD	WW	2700 K	1210	140	15000	IP20	**840393**	780
10,0	48V	10,0	SMD	WW	3000 K	1240	140	15000	IP20	**840394**	780
10,0	48V	10,0	SMD	NW	4000 K	1300	140	15000	IP20	**840395**	780
10,0	48V	10,0	SMD	WW	2700 K	1210	140	50000	IP20	**840401**	780
10,0	48V	10,0	SMD	WW	3000 K	1240	140	50000	IP20	**840402**	780
10,0	48V	10,0	SMD	NW	4000 K	1300	140	50000	IP20	**840403**	780
10,0	48V	10,0	SMD	WW	2700 K	1210	140	5000	IP20	**840440**	780
10,0	48V	10,0	SMD	RGB		550	140	15000	IP20	**840399**	778
10,0	48V	10,0	SMD	RGB		550	140	50000	IP20	**840407**	778
10,0	48V	10,0	SMD	RGB		550	140	5000	IP20	**840446**	778
10,0	48V	10,0	SMD	WW CW	2700-6500 K	1200	224	15000	IP20	**840434**	772
10,0	48V	10,0	SMD	WW CW	2700-6500 K	1200	224	5000	IP20	**840438**	772
10,0	48V	10,0	SMD	WW CW	2700-6500 K	1200	224	50000	IP20	**840436**	772
11,5	24V	11,0	SMD	WW	2700 K	900	120	5000	IP67	**840186**	753
11,5	24V	11,0	SMD	WW	3000 K	930	36	5000	IP67	**840187**	753
12,0	24V	10,0	COB	WW	2700 K	850	480	2000	IP67	**840409**	729
12,0	24V	10,0	COB	WW	3000 K	900	480	2000	IP67	**840410**	729
12,0	24V	10,0	COB	WW	2700 K	850	480	5000	IP67	**840411**	729
12,0	24V	10,0	COB	WW	3000 K	900	480	5000	IP67	**840412**	729
12,0	24V	12,0	COB	WW	2700 K	1170	480	5000	IP67	**840477**	737
12,0	24V	12,0	COB	WW	3000 K	1220	480	5000	IP67	**840478**	737
12,0	24V	12,0	COB	NW	4000 K	1400	480	5000	IP67	**840479**	737
12,0	24V	15,0	COB	WW	2700 K	2060	288	5000	IP67	**840470**	743
12,0	24V	15,0	COB	WW	3000 K	2060	288	5000	IP67	**840471**	743
12,0	24V	15,0	COB	NW	4000 K	2160	288	5000	IP67	**840472**	743
12,0	24V	15,0	COB	CW	6500 K	2150	288	5000	IP67	**840473**	743
12,0	24V	15,0	COB	WW CW	2700-6500 K	1300		5000	IP67	**840481**	739
12,0	24V	16,0	COB	RGB WW	3000 K	800		5000	IP20	**840482**	740
12,0	24V	22,0	SMD	RGB NW	4000 K	985	240	5000	IP20	**840309**	765
12,0	24V	22,0	SMD	RGB WW	3000 K	955	140	5000	IP20	**840308**	765
12,0	48V	10,0	SMD	WW	3000 K	1240	140	5000	IP20	**840442**	780
12,0	48V	10,0	SMD	NW	4000 K	1300	140	5000	IP20	**840444**	780
12,0	48V	10,0	SMD	RGB WW	3000 K	660	112	50000	IP20	**840456**	776

width in mm	Voltage [DC]	W/m	design	light colour	colour temperature	lm / m	LED / m	length in mm	protection rating	article number	page
12,0	48V	10,0	SMD	RGB WW	3000 K	660	112	5000	IP20	**840458**	776
12,0	48V	10,0	SMD	RGB WW	3000 K	660	112	15000	IP20	**840454**	776
12,0	48V	10,0	SMD	RGB NW	4000 K	700	112	50000	IP20	**840462**	776
12,0	48V	10,0	SMD	RGB NW	4000 K	700	112	5000	IP20	**840464**	776
12,0	48V	10,0	SMD	RGB NW	4000 K	700	112	15000	IP20	**840460**	776
12,0	48V	10,0	SMD	RGB WW CW	2700-6500 K	800	180	15000	IP20	**840448**	774
12,0	48V	10,0	SMD	RGB WW CW	2700-6500 K	800	180	50000	IP20	**840450**	774
12,0	48V	10,0	SMD	RGB WW CW	2700-6500 K	800	180	5000	IP20	**840452**	774
12,0	48V	10,0	SMD	WW	2700 K	1090	140	15000	IP67	**840396**	781
12,0	48V	10,0	SMD	WW	3000 K	1120	140	15000	IP67	**840397**	781
12,0	48V	10,0	SMD	NW	4000 K	1180	140	15000	IP67	**840398**	781
12,0	48V	10,0	SMD	WW	2700 K	1090	140	50000	IP67	**840404**	781
12,0	48V	10,0	SMD	WW	3000 K	1120	140	50000	IP67	**840405**	781
12,0	48V	10,0	SMD	NW	4000 K	1180	140	50000	IP67	**840406**	781
12,0	48V	10,0	SMD	RGB		510	140	15000	IP67	**840400**	779
12,0	48V	10,0	SMD	RGB		510	140	50000	IP67	**840408**	779
12,0	48V	10,0	SMD	RGB		510	140	5000	IP67	**840447**	779
12,0	48V	10,0	SMD	WW CW	2700-6500 K	1100	224	50000	IP67	**840437**	773
12,0	48V	10,0	SMD	WW CW	2700-6500 K	1100	224	15000	IP67	**840435**	773
12,0	48V	10,0	SMD	WW CW	2700-6500 K	1100	224	5000	IP67	**840439**	773
12,0	48V	15,0	COB	WW	2700 K	1575	480	15000	IP67	**840420**	732
12,0	48V	15,0	COB	WW	3000 K	1650	480	15000	IP67	**840421**	732
12,0	48V	15,0	COB	NW	4000 K	1800	480	15000	IP67	**840422**	732
12,0	48V	15,0	COB	WW	2700 K	1575	480	5000	IP67	**840423**	732
12,0	48V	15,0	COB	WW	3000 K	1650	480	5000	IP67	**840424**	732
12,0	48V	15,0	COB	NW	4000 K	1800	480	5000	IP67	**840425**	732
12,0	48V	15,0	COB	WW NW CW	2700-6500 K	610	560	15000	IP67	**840426**	732
12,0	48V	15,0	COB	WW NW CW	2700-6500 K	610	560	5000	IP67	**840427**	732
14,0	24V	15,0	COB	RGB WW	2700 K	600	1344	2000	IP67	**840414**	730
14,0	24V	15,0	COB	RGB WW	2700 K	600	1344	5000	IP67	**840416**	730
14,0	24V	16,0	COB	RGB WW	3000 K	800		5000	IP67	**840483**	741
14,0	48V	18,5	COB	RGB WW	3000 K	890	1120	15000	IP67	**840430**	734
14,0	48V	18,5	COB	RGB NW	4000 K	1010	1120	15000	IP67	**840431**	734
14,0	48V	18,5	COB	RGB WW	3000 K	890	1120	5000	IP67	**840432**	734
14,0	48V	18,5	COB	RGB NW	4000 K	1010	1120	5000	IP67	**840433**	734
14,5	24V	13,5	SMD	RGB		670	60	5000	IP67	**840256**	755
14,5	24V	15,0	SMD	RGB WW	3000 K	740	60	5000	IP67	**840239**	757
14,5	48V	10,0	SMD	WW	2700 K	1090	140	5000	IP67	**840441**	781
14,5	48V	10,0	SMD	WW	3000 K	1120	140	5000	IP67	**840443**	781
14,5	48V	10,0	SMD	NW	4000 K	1180	140	5000	IP67	**840445**	781
14,5	48V	10,0	SMD	RGB WW	3000 K	600	112	50000	IP67	**840457**	777
14,5	48V	10,0	SMD	RGB WW	3000 K	600	112	5000	IP67	**840459**	777

width in mm	Voltage [DC]	W/m	design	light colour	colour temperature	lm / m	LED / m	length in mm	protection rating	article number	page
14,5	48V	10,0	SMD	RGB WW	3000 K	600	112	15000	IP67	**840455**	777
14,5	48V	10,0	SMD	RGB NW	4000 K	650	180	50000	IP67	**840463**	777
14,5	48V	10,0	SMD	RGB NW	4000 K	650	112	5000	IP67	**840465**	777
14,5	48V	10,0	SMD	RGB NW	4000 K	650	112	15000	IP67	**840461**	777
14,5	48V	10,0	SMD	RGB WW CW	2700-6500 K	750	112	15000	IP67	**840449**	775
14,5	48V	10,0	SMD	RGB WW CW	2700-6500 K	750	112	50000	IP67	**840451**	775
14,5	48V	10,0	SMD	RGB WW CW	2700-6500 K	750	112	5000	IP67	**840453**	775
14,5	48V	15,0	COB	RGB		670	840	15000	IP67	**840428**	732
14,5	48V	15,0	COB	RGB		670	840	5000	IP67	**840429**	732
16,0	24V	10,5	Neon, Top-View	RGB WW	3000 K	320	36	5000	IP68	**840289**	767
17,0	230V	14,0	SMD	WW	3000 K	1470	84	15000	IP65	**840386**	785
17,0	230V	14,0	SMD	WW	3000 K	1470	84	50000	IP65	**840387**	785
17,0	230V	14,0	SMD	NW	4000 K	1596	82	15000	IP65	**840388**	785
17,0	230V	14,0	SMD	NW	4000 K	1596	82	50000	IP65	**840389**	785
17,0	230V	14,0	SMD	WW	2700 K	1442	82	15000	IP65	**840390**	785
17,0	230V	14,0	SMD	WW	2700 K	1442	82	50000	IP65	**840391**	785

COB STRIPES

These LED strips are ideal if the focus is on a homogeneous light pattern.

COB 24V-10W SAUNA IP67

IP67 Ra>90 SDCM<5

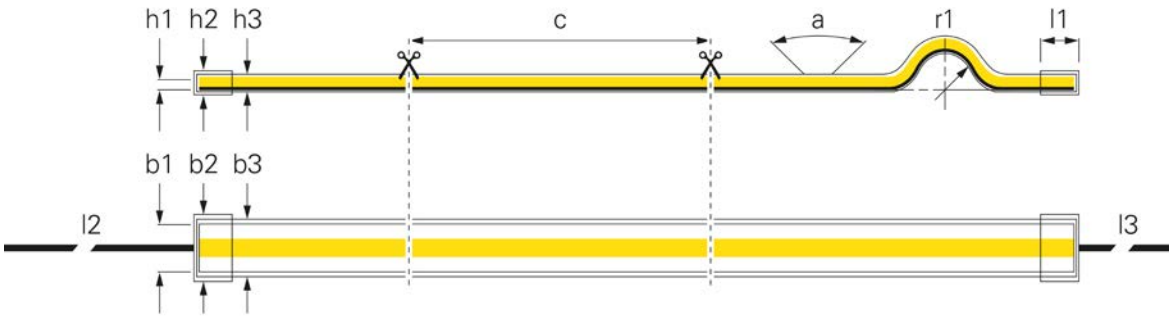

- **UV-resistant**
- **durably temperature-resistant [-10°C to 105°C]**
- **Lifetime 75,000h L70B50 / 50,000h L80B10**
- **2 m model ideal for home saunas with 2 m internal dimensions**
- **extra long supply line, Incl. mounting material**

(p) LED Distance	2.08 mm	(l1) Length End Cap	10 mm
(c) Segment Length	50 mm	(l2) Primary Cable Length	1.8 m
(a) Light Beam Angle	180 Degree	Rated Input 1m	10 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	5.5 mm	CRI (Ra)	90
(h2) Height End Cap	6.5 mm	Control	Dimmable via optional controller
(h3) Height Hose	5.5 mm		
(b1) Width	12 mm	Working Temperature	-10 to 105 °C
(b2) Width end cap	14.2 mm	Channels	1
(b3) Width Hose	12 mm		

Article		Colour Temperature	(l3) Secondary Cable Length	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840409	WW	2700 K		85 lm/W	850 lm	2000 mm	**€ 79.95**
840411	WW	2700 K	1.8 m	85 lm/W	850 lm	5000 mm	**€ 179.95**
840410	WW	3000 K		90 lm/W	900 lm	2000 mm	**€ 79.95**
840412	WW	3000 K	1.8 m	90 lm/W	900 lm	5000 mm	**€ 179.95**

CV | 1 CH | IP67 | III | A ↑ G | G

Accessories

930737	Supply cable for 24 V COB Sauna stripe	**€ 9.95**
930738	Connector for 24 V COB Sauna stripe	**€ 13.95**
930736	Silicone end cap set of 2 pieces for 24 V COB Sauna stripe	**€ 0.75**
930740	Plastic profile 1 m for 24 V COB Sauna stripe	**€ 3.95**
930741	Plastic profile 2 m for 24 V COB Sauna stripe	**€ 7.95**
930739	Silicone clamps for 24 V COB Sauna stripe	**€ 1.45**
930850	Silicone adhesive 10 ml	**€ 3.95**

COB 24V-15W SAUNA IP67

IP67 Ra>90 RGBWW SDCM<5

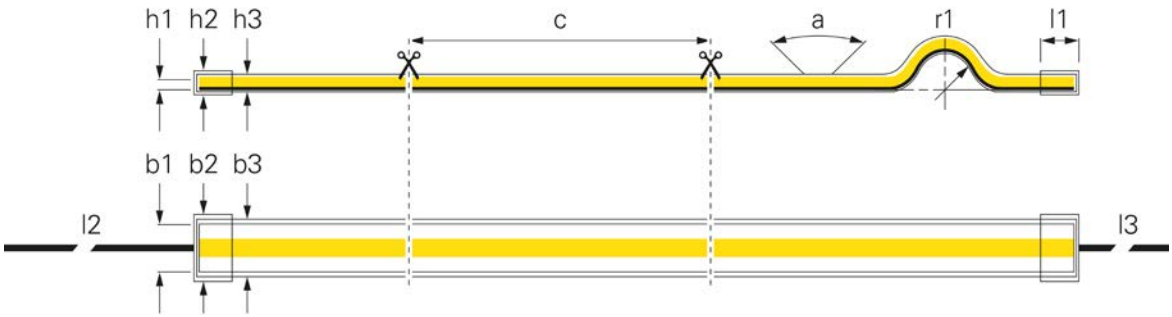

- **for saunas and steam baths**
- **available as RGB or RGBW [2,700K] variant**
- **UV-resistant**
- **durably temperature-resistant [-10°C to 105°C]**
- **2 m model ideal for home saunas with 2 m internal dimensions**
- **extra long supply line**
- **lifetime 75,000h L70B50 / 50,000 L80B10**
- **incl. mounting material**

(p) LED Distance	1.3 mm	Colour Temperature	2700 K
(c) Segment Length	83.3 mm	Luminous Efficiency 1m	40 lm/W
(r1) Bending Radius min.	50 mm	Luminous Flux 1m	600 lm
(h1) Height	5 mm	Rated Input 1m	15 W
(h2) Height End Cap	6.5 mm	Rated Input Voltage	24 V/DC
(h3) Height Hose	5 mm	CRI (Ra)	90
(b1) Width	14 mm	Control	Dimmable via optional controller
(b2) Width end cap	16.2 mm	Working Temperature	-10 to 105 °C
(b3) Width Hose	14 mm	Channels	4
(l1) Length End Cap	10 mm		
(l2) Primary Cable Length	1.8 m		

Article		(l3) Secondary Cable Length	Length	Price
840414	RGB WW		2000 mm	**€ 119.95**
840416	RGB WW	1.8 m	5000 mm	**€ 267.95**

CV 4 CH IP67

Accessories

930800	Supply cable for 24 V COB RGBW Sauna stripe		**€ 9.95**
930801	Connector for 24 V COB RGBW Sauna stripe		**€ 13.95**
930797	Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe		**€ 0.75**
930803	Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe		**€ 4.95**
930804	Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe		**€ 9.95**
930802	Silicone clamps for 24 V COB RGB/RGBW Sauna stripe		**€ 1.45**
930850	Silicone adhesive 10 ml		**€ 3.95**

COB 48V-15W FACADE LONG RUN IP67

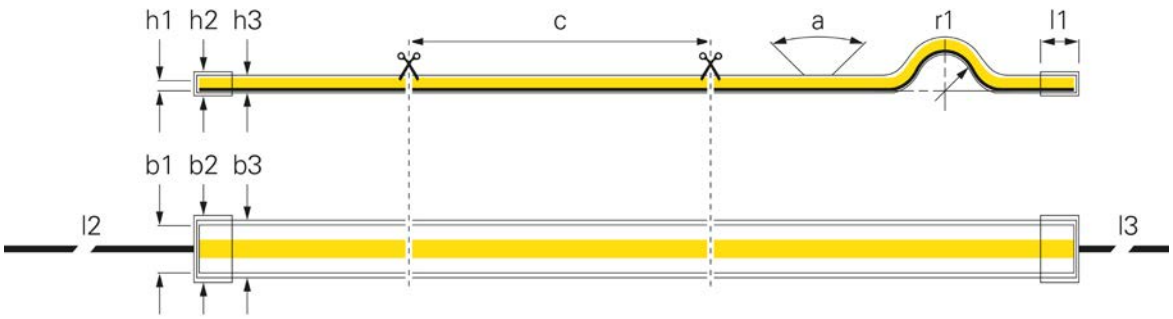

- **for weather-exposed building facades**
- **for outdoor areas with direct sunlight**
- **UV-resistant**
- **permanently temperature-resistant (-40°C to 95°C)**
- **long service life with 75,000h L70B50 / 50,000h L80B10**
- **solder-free accessories**
- **3M VHB 5604A adhesive tape with silicone primer pre-treatment**

(c) Segment Length	100 mm	Rated Input 1m	15 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(l1) Length End Cap	10 mm	Working Temperature	-40 to 95 °C
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m		

Article		Colour Temperature	(p) LED Distance	(h1) Height	(h2) Height	(h3) Height	(b1) Width	EEI	Price
840428	RGB		1.19 mm	5 mm	5.5 mm	5 mm	14.5 mm		**€ 719.95**
840429	RGB		1.19 mm	5 mm	5.5 mm	5 mm	14.5 mm		**€ 259.95**
840426	WW CW	2700-6500 K	1.79 mm	5.5 mm	6.5 mm	5.5 mm	12 mm	G	**€ 539.95**
840427	WW CW	2700-6500 K	1.79 mm	5.5 mm	6.5 mm	5.5 mm	12 mm	G	**€ 199.95**
840420	WW	2700 K	2.08 mm	5.5 mm	6.5 mm	5.5 mm	12 mm	F	**€ 399.95**
840423	WW	2700 K	2.08 mm	5.5 mm	6.5 mm	5.5 mm	12 mm	F	**€ 143.95**
840421	WW	3000 K	2.08 mm	5.5 mm	6.5 mm	5.5 mm	12 mm	F	**€ 399.95**
840424	WW	3000 K	2.08 mm	5.5 mm	6.5 mm	5.5 mm	12 mm	F	**€ 143.95**
840422	NW	4000 K	2.08 mm	5.5 mm	6.5 mm	5.5 mm	12 mm	E	**€ 399.95**
840425	NW	4000 K	2.08 mm	5.5 mm	6.5 mm	5.5 mm	12 mm	E	**€ 143.95**

IP67

Accessories

930850	Silicone adhesive 10 ml	**€ 3.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 91.95**

Accessories for **840420**, **840421**, **840422**

862276	BASIC, DIM, CV, LCP DALI, 48V, 240W, IP20	**€ 175.95**

Accessories for **840420**, **840421**, **840422**, **840423**, **840424**, **840425**

930737	Supply cable for 24 V COB Sauna stripe	**€ 9.95**
930738	Connector for 24 V COB Sauna stripe	**€ 13.95**

Accessories for **840420**, **840421**, **840422**, **840423**, **840424**, **840425**, **840426**, **840427**

930736	Silicone end cap set of 2 pieces for 24 V COB Sauna stripe	**€ 0.75**
930739	Silicone clamps for 24 V COB Sauna stripe	**€ 1.45**
930740	Plastic profile 1 m for 24 V COB Sauna stripe	**€ 3.95**
930741	Plastic profile 2 m for 24 V COB Sauna stripe	**€ 7.95**
843341	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6	**€ 67.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control	**€ 79.95**

Accessories for **840420**, **840421**, **840422**, **840426**, **840428**

862272	LONG-FLAT, CV, LT-240-48	**€ 127.95**
862281	Long-Flat, DIM, CV, 48V 80-240W	**€ 127.95**
872125	CV, HLG-600H-48 A	**€ 391.95**
872126	DIM, CV, HLG-600H-48B	**€ 399.95**
872145	IP, CV, V6-320-48	**€ 175.95**

Accessories for **840423**, **840424**, **840425**

862273	BASIC, DIM, CV, LCP DALI, 48V, 75W, IP20	**€ 103.95**
862275	BASIC, DIM, CV, LCP DALI, 48V, 150W, IP20	**€ 135.95**
872115	CV, PWM-200-48 KN	**€ 195.95**

Accessories for **840423**, **840424**, **840425**, **840427**, **840429**

862269	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 103.95**
862270	LONG-FLAT, CV, LT-100-48	**€ 77.95**
862271	LONG-FLAT, CV, LT-150-48	**€ 103.95**
862274	BASIC, DIM, CV, 48 V 34-100 W	**€ 115.95**
862283	Long-Flat, DIM, CV, 48V 25-75W	**€ 79.95**
872142	LED power supply, IP, DIM, CV, 48 V, 33-100 W	**€ 135.95**
872143	LED power supply, IP, DIM, CV, 48 V, 66-200 W	**€ 165.95**

Accessories for **840426**, **840427**

930865	End cap for Facade Long Run series	**€ 6.95**
930866	Connecting cable for Facade Long Run series	**€ 9.95**
843342	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8	**€ 67.95**

Accessories for **840428**, **840429**

930797	Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe	**€ 0.75**
930798	Supply cable for 24 V COB RGB Sauna stripe	**€ 9.95**
930799	Connector for 24 V COB RGB Sauna stripe	**€ 13.95**
930802	Silicone clamps for 24 V COB RGB/RGBW Sauna stripe	**€ 1.45**
930803	Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe	**€ 4.95**
930804	Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe	**€ 9.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 75.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 79.95**

COB 48 V-18.5 W FACADE LONG RUN IP67

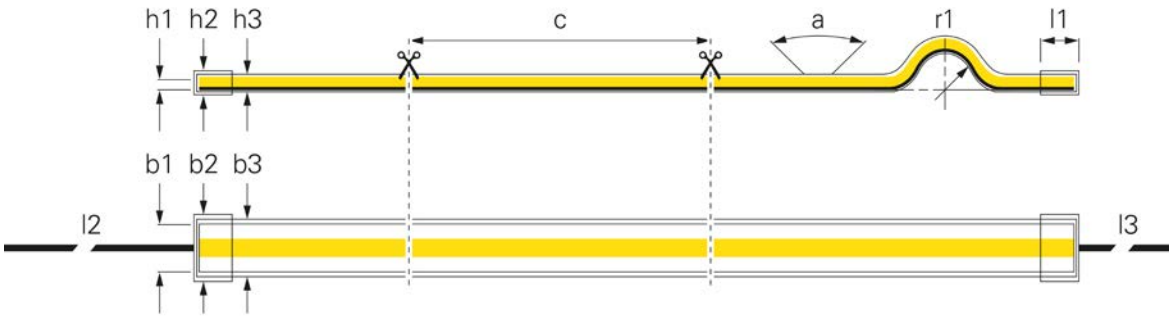

- **For weathered building façades**
- **For outdoor areas exposed to direct sunlight**
- **UV-resistant**
- **Permanently temperature-resistant (-40 °C to 95 °C)**
- **Long service life with 75,000 h L70B50/50,000 h L80B10**
- **Solder-free accessories**
- **3M VHB 5604A adhesive tape with silicone primer pre-treatment**

(p) LED Distance	1.56 mm	(l1) Length End Cap	10 mm
(c) Segment Length	100 mm	(l2) Primary Cable Length	1 m
(a) Light Beam Angle	120 Degree	(l3) Secondary Cable Length	1 m
(r1) Bending Radius min.	50 mm	Rated Input 1m	18.5 W
(h1) Height	0.5 mm	Rated Input Voltage	48 V/DC
(h2) Height End Cap	5.5 mm	CRI (Ra)	90
(h3) Height Hose	5.5 mm	Control	Dimmable via optional controller
(b1) Width	12 mm		
(b2) Width end cap	14 mm	Working Temperature	-40 to 95 °C
(b3) Width Hose	14 mm	Channels	4

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840432	RGB WW	3000 K	64 lm/W	890 lm	5000 mm	**€ 303.95**
840430	RGB WW	3000 K	64 lm/W	890 lm	15000 mm	**€ 799.95**
840433	RGB NW	4000 K	45 lm/W	1010 lm	5000 mm	**€ 303.95**
840431	RGB NW	4000 K	45 lm/W	1010 lm	15000 mm	**€ 799.95**

4 CH IP67 III A↑G G

Accessories

930800	Supply cable for 24 V COB RGBW Sauna stripe	**€ 9.95**
930801	Connector for 24 V COB RGBW Sauna stripe	**€ 13.95**
930797	Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe	**€ 0.75**
930803	Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe	**€ 4.95**
930804	Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe	**€ 9.95**
930802	Silicone clamps for 24 V COB RGB/RGBW Sauna stripe	**€ 1.45**
930850	Silicone adhesive 10 ml	**€ 3.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 79.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 75.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8	**€ 75.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 91.95**

Accessories for **840430**, **840431**

862272	LONG-FLAT, CV, LT-240-48	**€ 127.95**
862281	Long-Flat, DIM, CV, 48V 80-240W	**€ 127.95**
872125	CV, HLG-600H-48 A	**€ 391.95**
872126	DIM, CV, HLG-600H-48B	**€ 399.95**
872145	IP, CV, V6-320-48	**€ 175.95**

Accessories for **840432**, **840433**

862269	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 103.95**
862270	LONG-FLAT, CV, LT-100-48	**€ 77.95**
862271	LONG-FLAT, CV, LT-150-48	**€ 103.95**
862274	BASIC, DIM, CV, 48 V 34-100 W	**€ 115.95**
862283	Long-Flat, DIM, CV, 48V 25-75W	**€ 79.95**
872142	LED power supply, IP, DIM, CV, 48 V, 33-100 W	**€ 135.95**
872143	LED power supply, IP, DIM, CV, 48 V, 66-200 W	**€ 165.95**

COB 24V-12W STANDARD IP20

NEW | Ra>90 | SDCM<5

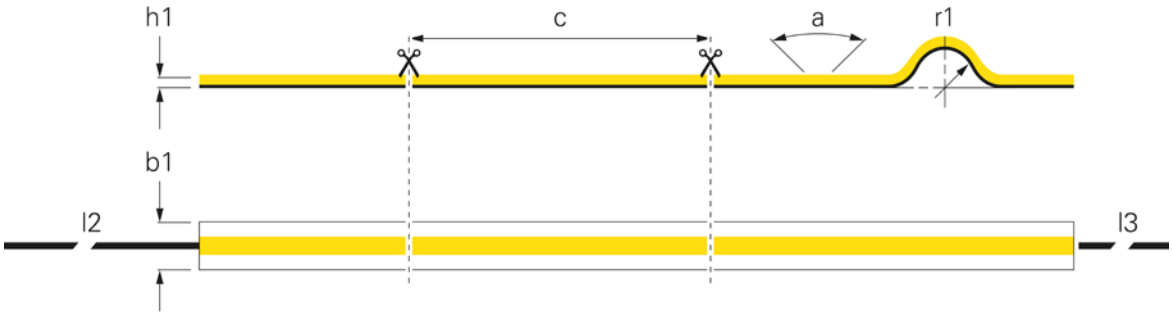

(p) LED Distance	2.08 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input 1m	12 W
(a) Light Beam Angle	180 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	30 mm	CRI (Ra)	90
(h1) Height	2.2 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(l2) Primary Cable Length	0.5 m	Working Temperature	-20 to 50 °C
(l3) Secondary Cable Length	0.5 m	Channels	1

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840474	WW	2700 K	88 lm/W	1050 lm	**€ 55.95**
840475	WW	3000 K	113 lm/W	1360 lm	**€ 55.95**
840476	NW	4000 K	110 lm/W	1320 lm	**€ 55.95**

CV | 1 CH | IP20 | A ↑ G | F

Accessories

862270	LONG-FLAT, CV, LT-100-48	**€ 77.95**
862271	LONG-FLAT, CV, LT-150-48	**€ 103.95**
862269	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 103.95**
862274	BASIC, DIM, CV, 48 V 34-100 W	**€ 115.95**
872142	LED power supply, IP, DIM, CV, 48 V, 33-100 W	**€ 135.95**
872143	LED power supply, IP, DIM, CV, 48 V, 66-200 W	**€ 165.95**
862262	BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20	**€ 135.95**
862263	BASIC, DIM, CV, LCP DALI, 24V, 240W, IP20	**€ 175.95**
872113	CV, PWM-120-24 KN	**€ 167.95**
931101	Mounting roller for 8/10mm LED-Stripes, blue	**€ 11.95**
931102	Mounting roller for 10/12mm LED-Stripes, blue	**€ 11.95**

COB 24V-12W STANDARD IP67

NEW | IP67 | Ra>90 | SDCM<5

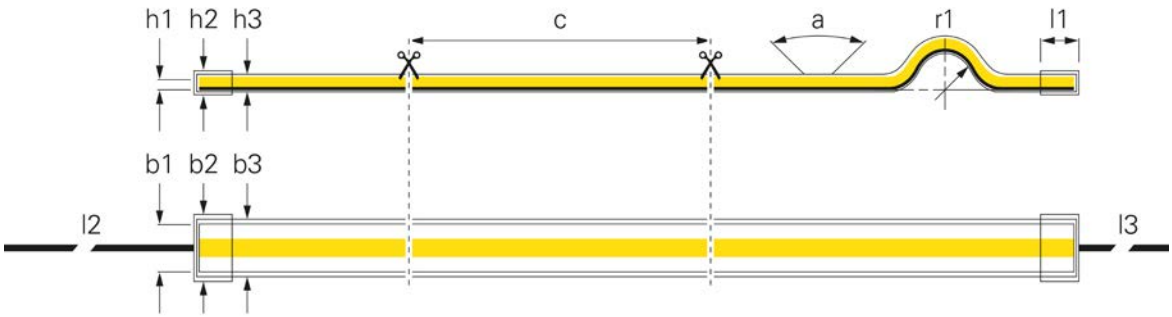

(p) LED Distance	2.08 mm	(l2) Primary Cable Length	0.5 m
(c) Segment Length	50 mm	(l3) Secondary Cable Length	0.5 m
(a) Light Beam Angle	180 Degree	Length	5000 mm
(r1) Bending Radius min.	70 mm	Rated Input 1m	12 W
(h1) Height	4.5 mm	Rated Input Voltage	24 V/DC
(h2) Height End Cap	3.2 mm	CRI (Ra)	90
(h3) Height Hose	2.2 mm	Control	Dimmable via optional controller
(b1) Width	12 mm		
(b2) Width end cap	14 mm	Type of IP Protection	Silicone hose
(b3) Width Hose	12 mm	Working Temperature	-20 to 50 °C
(l1) Length End Cap	10 mm	Channels	1

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840477	WW 2700 K	98 lm/W	1170 lm	**€ 71.95**
840478	WW 3000 K	102 lm/W	1220 lm	**€ 71.95**
840479	NW 4000 K	117 lm/W	1400 lm	**€ 71.95**

CV | 1 CH | IP67 | III | A ↑ G | F

Accessories

862270	LONG-FLAT, CV, LT-100-48	**€ 77.95**
862271	LONG-FLAT, CV, LT-150-48	**€ 103.95**
862269	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 103.95**
862274	BASIC, DIM, CV, 48 V 34-100 W	**€ 115.95**
872142	LED power supply, IP, DIM, CV, 48 V, 33-100 W	**€ 135.95**
872143	LED power supply, IP, DIM, CV, 48 V, 66-200 W	**€ 165.95**
862262	BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20	**€ 135.95**
862263	BASIC, DIM, CV, LCP DALI, 24V, 240W, IP20	**€ 175.95**
872113	CV, PWM-120-24 KN	**€ 167.95**
931102	Mounting roller for 10/12mm LED-Stripes, blue	**€ 11.95**

COB 24V-15W STANDARD IP20

NEW | CCT | Ra>90 | SDCM<5

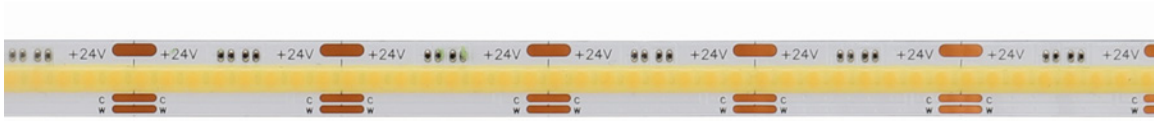

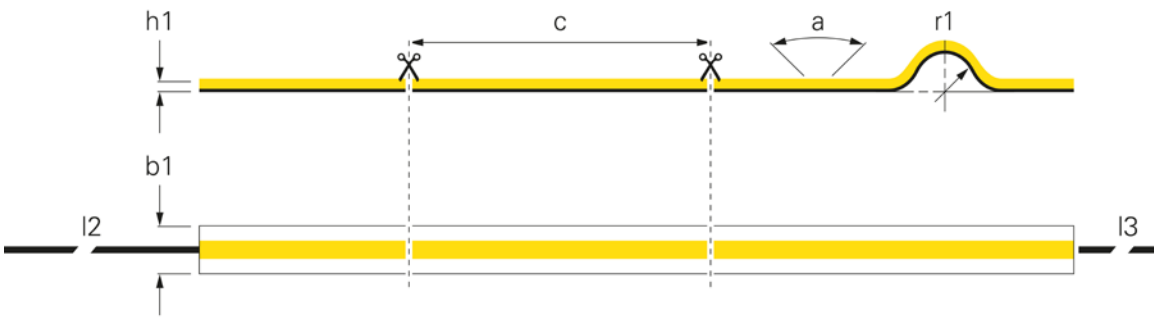

(p) LED Distance	1.73 mm	Luminous Flux 1m	1550 lm
(c) Segment Length	27.8 mm	Length	5000 mm
(a) Light Beam Angle	180 Degree	Rated Input 1m	15 W
(r1) Bending Radius min.	15 mm	Rated Input Voltage	24 V/DC
(h1) Height	1.8 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	0.5 m		
(l3) Secondary Cable Length	0.5 m	Working Temperature	-20 to 50 °C
Colour Temperature	2700-6500 K	Channels	2

Article	Colour Temperature	Price
840480	WW CW 2700-6500 K	**€ 119.95**

CV | 2 CH | IP20 | A↑G F

Accessories

843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 79.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free		**€ 91.95**
843341	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6		**€ 67.95**
843342	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8		**€ 67.95**
862270	LONG-FLAT, CV, LT-100-48		**€ 77.95**
862271	LONG-FLAT, CV, LT-150-48		**€ 103.95**
931101	Mounting roller for 8/10mm LED-Stripes, blue		**€ 11.95**
931102	Mounting roller for 10/12mm LED-Stripes, blue		**€ 11.95**

COB 24V-15W STANDARD IP67

NEW | CCT | IP67 | Ra>90

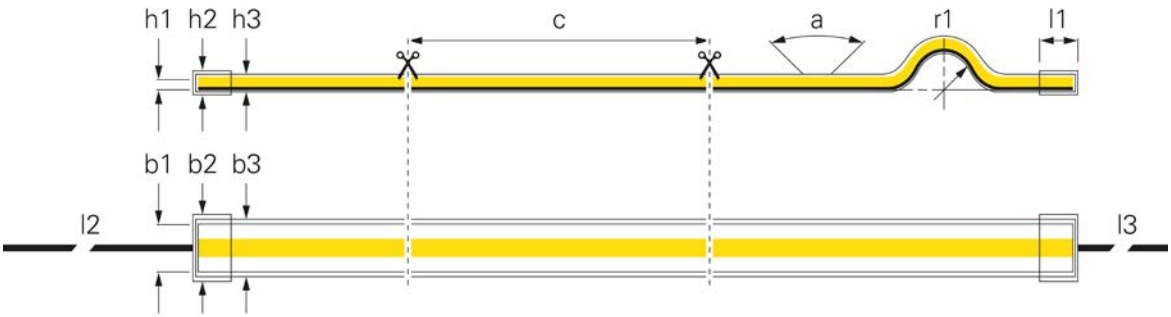

(p) LED Distance	1.73 mm	(l3) Secondary Cable Length	0.5 m
(c) Segment Length	27.8 mm	Colour Temperature	2700-6500 K
(a) Light Beam Angle	180 Degree	Luminous Flux 1m	1300 lm
(r1) Bending Radius min.	50 mm	Length	5000 mm
(h1) Height	4.5 mm	Rated Input 1m	15 W
(h2) Height End Cap	6 mm	Rated Input Voltage	24 V/DC
(h3) Height Hose	4.5 mm	CRI (Ra)	90
(b1) Width	12 mm	Control	Dimmable via optional controller
(b2) Width end cap	14 mm		
(b3) Width Hose	12 mm	Type of IP Protection	Silicone hose
(l1) Length End Cap	10 mm	Working Temperature	-20 to 50 °C
(l2) Primary Cable Length	0.5 m	Channels	2

Article	Colour Temperature	Price
840481	WW CW 2700-6500 K	**€ 135.95**

CV | 2 CH | IP67 | A↑G F

Accessories

843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 79.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free		**€ 91.95**
843341	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6		**€ 67.95**
843342	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8		**€ 67.95**
862270	LONG-FLAT, CV, LT-100-48		**€ 77.95**
862271	LONG-FLAT, CV, LT-150-48		**€ 103.95**
931102	Mounting roller for 10/12mm LED-Stripes, blue		**€ 11.95**

COB 24V-16W STANDARD IP20

NEW | Ra>90 | RGBWW | SDCM<5

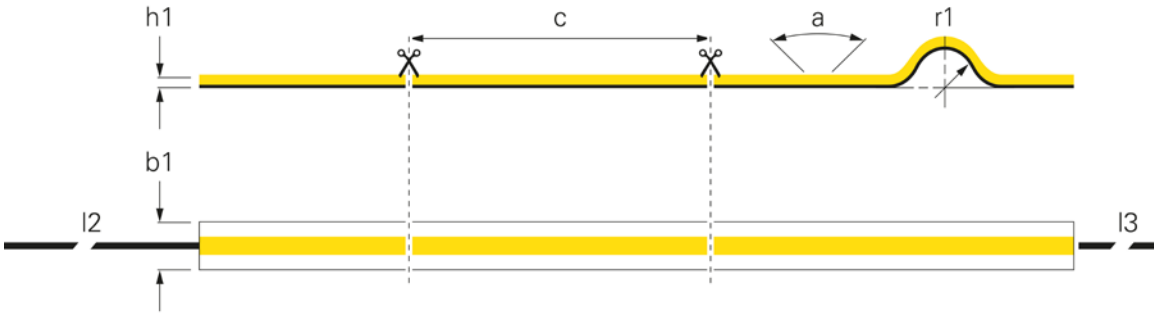

· **high-performance adhesive tape 3M 300MP**

(p) LED Distance	1.78 mm	Luminous Flux 1m	800 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	180 Degree	Rated Input 1m	16 W
(r1) Bending Radius min.	15 mm	Rated Input Voltage	24 V/DC
(h1) Height	1.8 mm	CRI (Ra)	90
(b1) Width	12 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	0.5 m		
(l3) Secondary Cable Length	0.5 m	Working Temperature	-20 to 50 °C
Colour Temperature	3000 K	Channels	4
Luminous Efficiency 1m	49 lm/W		

Article		Price
840482	RGB WW	**€ 159.95**

CV | 4 CH | IP20 | A ↑ G | G

Accessories

843542	RF-smart, Starter-Set RGB/W/CCT, 12-48V, 20A incl. Remote, IP20	**€ 91.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)	**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 91.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 75.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8	**€ 75.95**
862166	BASIC, CV, Q8H-24-100 W	**€ 77.95**
872089	IP, CV, V6-240-24	**€ 147.95**
862301	Basic, Casambi 3/4 Kanal, 24V, 150W, IP20	**€ 167.95**
931102	Mounting roller for 10/12mm LED-Stripes, blue	**€ 11.95**

COB 24V-16W STANDARD IP67

NEW | IP67 | Ra>90 | RGBWW

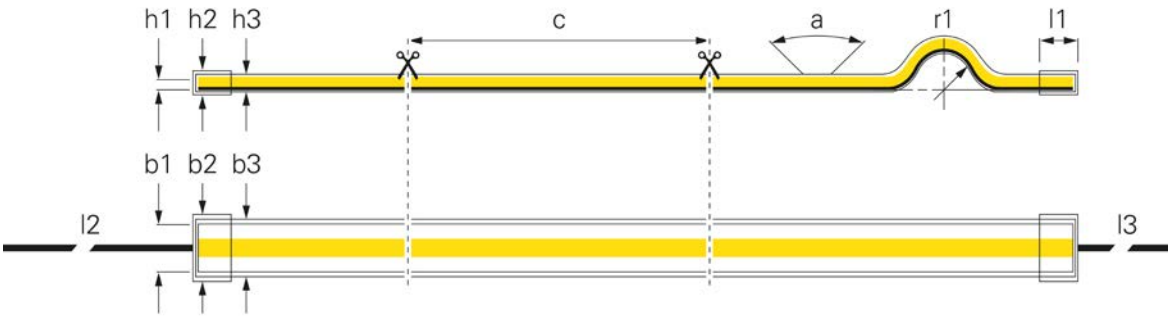

(p) LED Distance	1.78 mm	Colour Temperature	3000 K
(c) Segment Length	50 mm	Luminous Efficiency 1m	49 lm/W
(a) Light Beam Angle	180 Degree	Luminous Flux 1m	800 lm
(r1) Bending Radius min.	50 mm	Length	5000 mm
(h1) Height	4.5 mm	Rated Input 1m	16 W
(h2) Height End Cap	6 mm	Rated Input Voltage	24 V/DC
(h3) Height Hose	4.5 mm	CRI (Ra)	90
(b1) Width	14 mm	Control	Dimmable via optional controller
(b2) Width end cap	14 mm		
(b3) Width Hose	14 mm	Type of IP Protection	Silicone hose
(l1) Length End Cap	10 mm	Working Temperature	-20 to 50 °C
(l2) Primary Cable Length	0.5 m	Channels	4
(l3) Secondary Cable Length	0.5 m		

Article		Price
840483	RGB WW	**€ 175.95**

CV | 4 CH | IP67 | A ↑ G | G

Accessories

843542	RF-smart, Starter-Set RGB/W/CCT, 12-48V, 20A incl. Remote, IP20	**€ 91.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)	**€ 143.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 91.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 75.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8	**€ 75.95**
862166	BASIC, CV, Q8H-24-100 W	**€ 77.95**
872089	IP, CV, V6-240-24	**€ 147.95**
862301	Basic, Casambi 3/4 Kanal, 24V, 150W, IP20	**€ 167.95**

COB 24V-15W PROFESSIONAL IP20

NEW

Ra>90

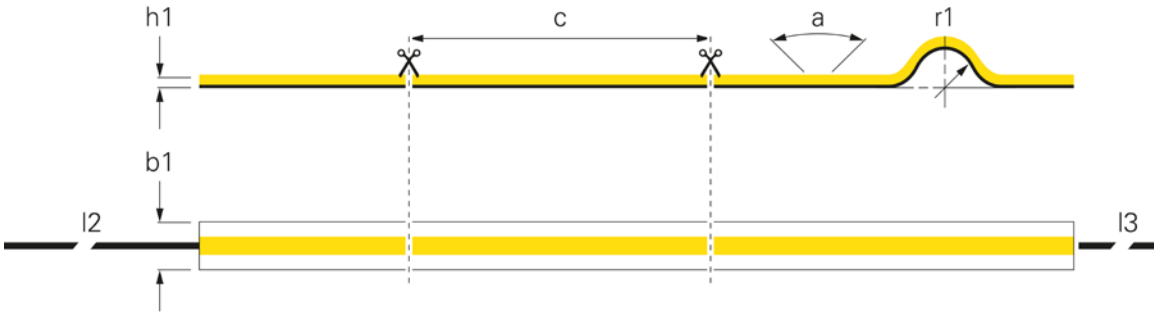

(p) LED Distance	3.47 mm	Length	5000 mm
(c) Segment Length	27.77 mm	Rated Input 1m	15 W
(a) Light Beam Angle	180 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	30 mm	CRI (Ra)	90
(h1) Height	2.2 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(l2) Primary Cable Length	0.5 m	Working Temperature	-20 to 50 °C
(l3) Secondary Cable Length	0.5 m	Channels	1

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840466	WW	2700 K	140 lm/W	2100 lm	**€ 71.95**
840467	WW	3000 K	170 lm/W	2550 lm	**€ 71.95**
840468	NW	4000 K	179 lm/W	2690 lm	**€ 71.95**
840469	CW	6500 K	179 lm/W	2690 lm	**€ 71.95**

Accessories

862270	LONG-FLAT, CV, LT-100-48	**€ 77.95**
862271	LONG-FLAT, CV, LT-150-48	**€ 103.95**
862269	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 103.95**
862274	BASIC, DIM, CV, 48 V 34-100 W	**€ 115.95**
872142	LED power supply, IP, DIM, CV, 48 V, 33-100 W	**€ 135.95**
872143	LED power supply, IP, DIM, CV, 48 V, 66-200 W	**€ 165.95**
862262	BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20	**€ 135.95**
862263	BASIC, DIM, CV, LCP DALI, 24V, 240W, IP20	**€ 175.95**
872113	CV, PWM-120-24 KN	**€ 167.95**
931101	Mounting roller for 8/10mm LED-Stripes, blue	**€ 11.95**
931102	Mounting roller for 10/12mm LED-Stripes, blue	**€ 11.95**

COB 24V-15W PROFESSIONAL IP67

NEW | IP67 | Ra>90

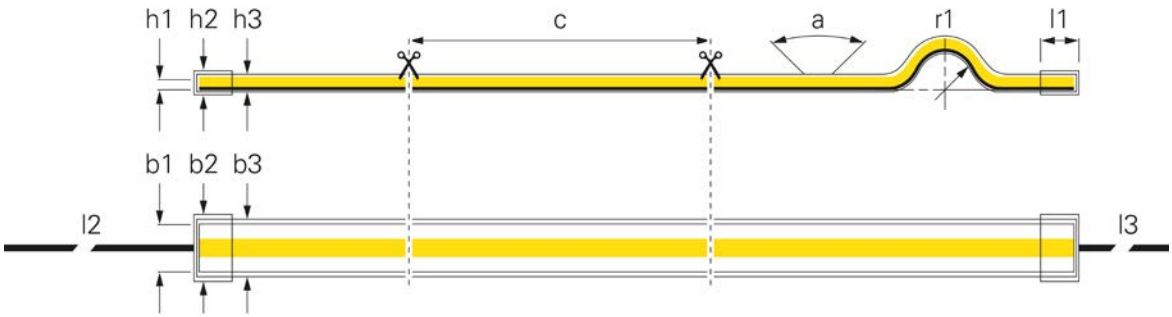

(p) LED Distance	3.47 mm	(l2) Primary Cable Length	0.5 m
(c) Segment Length	27.77 mm	(l3) Secondary Cable Length	0.5 m
(a) Light Beam Angle	180 Degree	Length	5000 mm
(r1) Bending Radius min.	70 mm	Rated Input 1m	15 W
(h1) Height	4.5 mm	Rated Input Voltage	24 V/DC
(h2) Height End Cap	3.2 mm	CRI (Ra)	90
(h3) Height Hose	2.2 mm	Control	Dimmable via optional controller
(b1) Width	12 mm		
(b2) Width end cap	14 mm	Type of IP Protection	Silicone hose
(b3) Width Hose	12 mm	Working Temperature	-20 to 50 °C
(l1) Length End Cap	10 mm	Channels	1

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840470	WW	2700 K	137 lm/W	2060 lm	**€ 87.95**
840471	WW	3000 K	137 lm/W	2060 lm	**€ 87.95**
840472	NW	4000 K	144 lm/W	2160 lm	**€ 87.95**
840473	CW	6500 K	143 lm/W	2150 lm	**€ 87.95**



Accessories

862270	LONG-FLAT, CV, LT-100-48		**€ 77.95**
862271	LONG-FLAT, CV, LT-150-48		**€ 103.95**
862269	Long-Flat, DIM, CV, 48 V 50-150 W		**€ 103.95**
862274	BASIC, DIM, CV, 48 V 34-100 W		**€ 115.95**
872142	LED power supply, IP, DIM, CV, 48 V, 33-100 W		**€ 135.95**
872143	LED power supply, IP, DIM, CV, 48 V, 66-200 W		**€ 165.95**
862262	BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20		**€ 135.95**
862263	BASIC, DIM, CV, LCP DALI, 24V, 240W, IP20		**€ 175.95**
872113	CV, PWM-120-24 KN		**€ 167.95**
931102	Mounting roller for 10/12mm LED-Stripes, blue		**€ 11.95**

12V LED STRIPES

These LED strips are ideally suited for all standard applications and special assemblies with the most diverse requirements. With voltages of 12V, different protection classes, lumens, number of LEDs, power and much more, you too can find the right LED strip for your application.

SMD 12V-7W SHORT CUT IP20

Ra>90

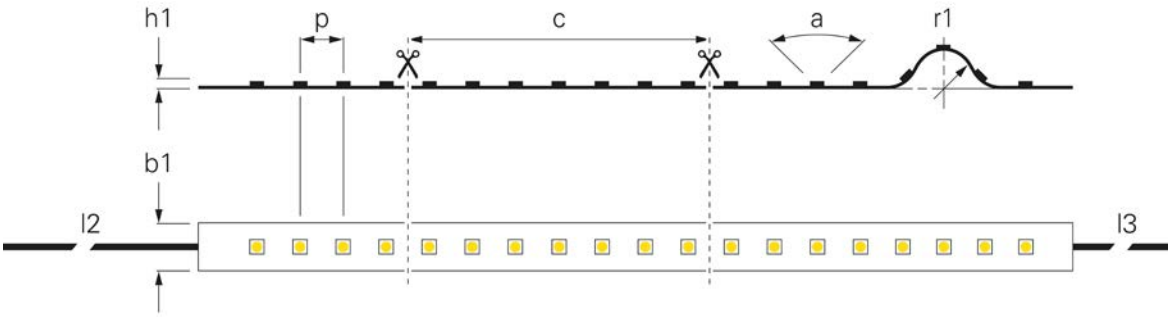

·high-performance adhesive 3M 9448A

(p) LED Distance	8.33 mm	Length	5000 mm
(c) Segment Length	25 mm	Rated Input Voltage	12 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(h1) Height	3 mm		
(b1) Width	8 mm	Working Temperature	-15 to 50 °C
(l2) Primary Cable Length	1 m	Channels	1
(l3) Secondary Cable Length	1 m		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	EEI	Price
840164	WW	2700 K	81.43 lm/W	570 lm	7.0 W	G	**€ 71.95**
840165	WW	3000 K	85.38 lm/W	555 lm	6.5 W	F	**€ 71.95**
840166	NW	4000 K	95.71 lm/W	670 lm	7.0 W	F	**€ 71.95**
840167	CW	6500 K	90 lm/W	630 lm	7.0 W	F	**€ 71.95**

CV | 1 CH | IP20

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

24V LED STRIPES

These LED strips are ideal for all standard applications and special assemblies with a wide range of requirements. With voltages of 24V, different protection classes, lumens, number of LEDs, power and much more, you too will find the right LED strip for your application.

SMD 24V-10W LONG RUN IP20

Ra>90

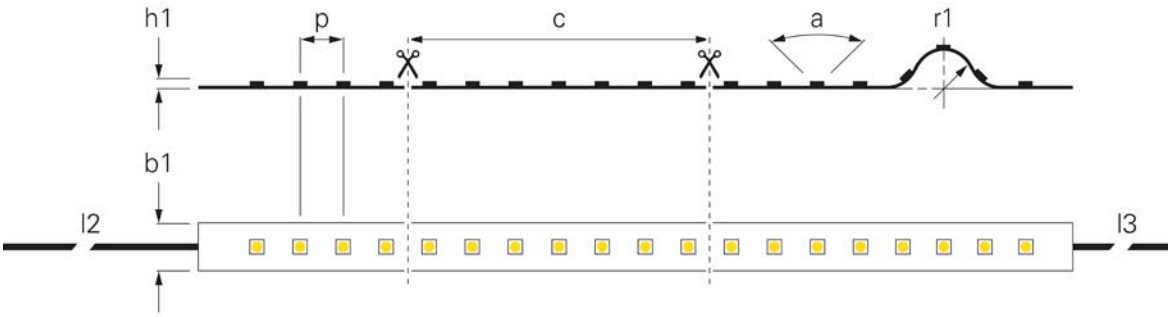

·high-performance adhesive 3M 9448A

(p) LED Distance	8.33 mm	Luminous Flux 1m	705 lm
(c) Segment Length	50 mm	Length	10000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	9.5 W
(r1) Bending Radius min.	20 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-15 to 50 °C
Colour Temperature	3000 K	Channels	1
Luminous Efficiency 1m	74.21 lm/W		

Article		Price
840291	WW	**€ 319.95**

CV | 1 CH | IP20 | A ↑ G | G

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

SMD 24V-10W SLIM IP20

Ra>90

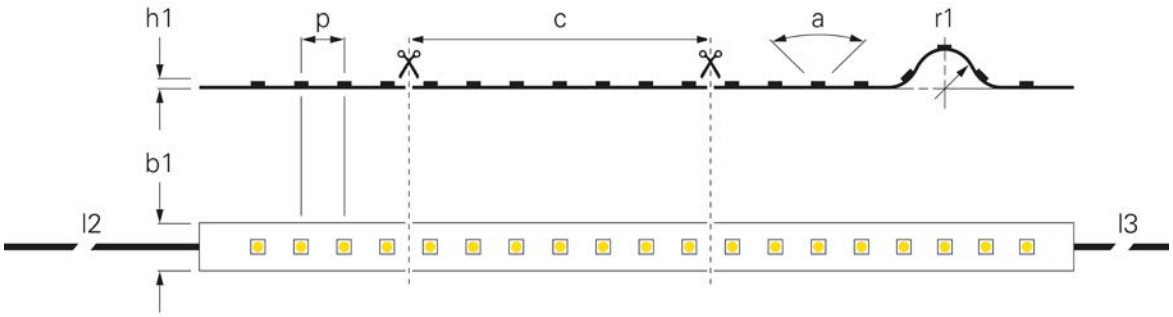

·high-performance adhesive 3M 9448A

(p) LED Distance	8.33 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input 1m	9.6 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	CRI (Ra)	90
(h1) Height	3 mm	Control	Dimmable via optional controller
(b1) Width	5 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	1

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840158	WW	2700 K	80 lm/W	770 lm	**€ 63.95**
840159	WW	3000 K	85 lm/W	820 lm	**€ 63.95**

CV | 1 CH | IP20 | A↑G | G

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-11W SLIM IP20

Ra>90

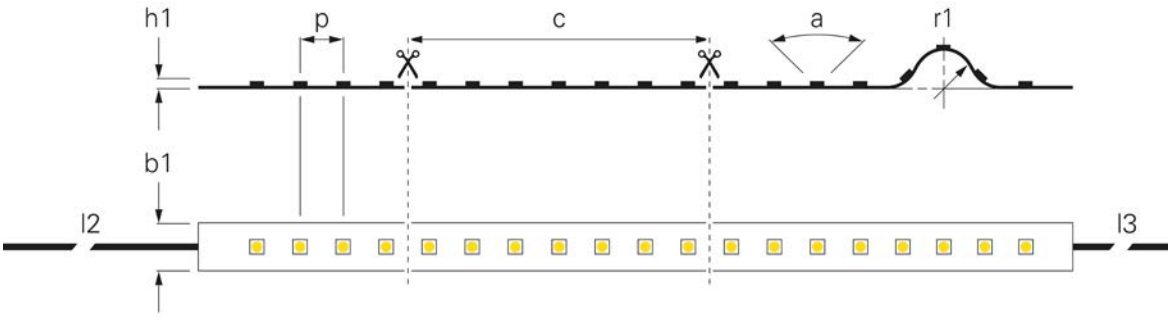

· high-performance adhesive 3M 9448A

(p) LED Distance	3.8 mm	Length	5000 mm
(c) Segment Length	26.3 mm	Rated Input Voltage	24 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(h1) Height	2 mm		
(b1) Width	4 mm	Working Temperature	-15 to 50 °C
(l2) Primary Cable Length	1 m	Channels	1
(l3) Secondary Cable Length	1 m		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	Price
840175	WW	2700 K	90.45 lm/W	995 lm	11.0 W	**€ 135.95**
840210	WW	3000 K	99.09 lm/W	1090 lm	11.0 W	**€ 135.95**
840267	NW	4000 K	95.65 lm/W	1100 lm	11.5 W	**€ 135.95**

CV | 1 CH | IP20 | A ↑ G | F

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24 V-11 W CCT SLIM IP20

CCT Ra>90

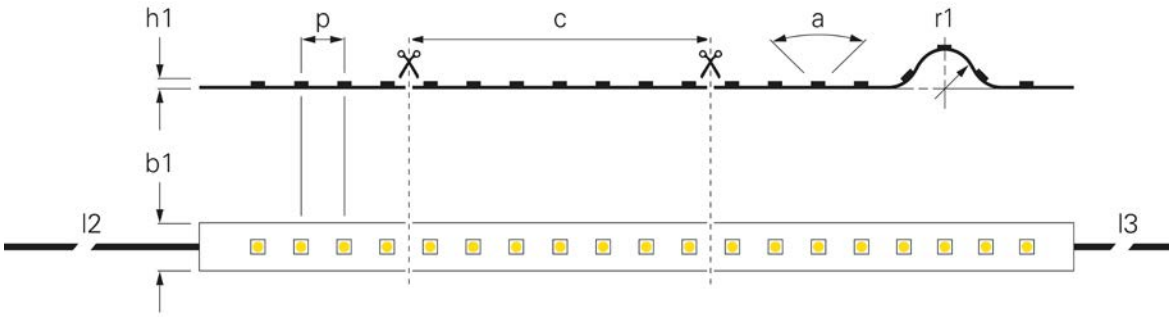

· **high-performance adhesive tape 3M 200MP**

(p) LED Distance	10.2 mm	Colour Temperature	3000-6500 K
(c) Segment Length	71.4 mm	Luminous Efficiency 1m	93.18 lm/W
(a) Light Beam Angle	120 Degree	Luminous Flux 1m	1025 lm
(r1) Bending Radius min.	50 mm	Length	5000 mm
(h1) Height	1.2 mm	Rated Input 1m	11 W
(h2) Height End Cap	2.6 mm	Rated Input Voltage	24 V/DC
(b1) Width	5 mm	CRI (Ra)	90
(b2) Width end cap	5.5 mm	Control	Dimmable via optional controller
(l1) Length End Cap	15 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 60 °C
(l3) Secondary Cable Length	1 m	Channels	2

Article	Colour Temperature	Price
840350	WW CW 3000-6500 K	**€ 99.95**

CV 2 CH IP20 A↑G E

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-12W SLIM IP65

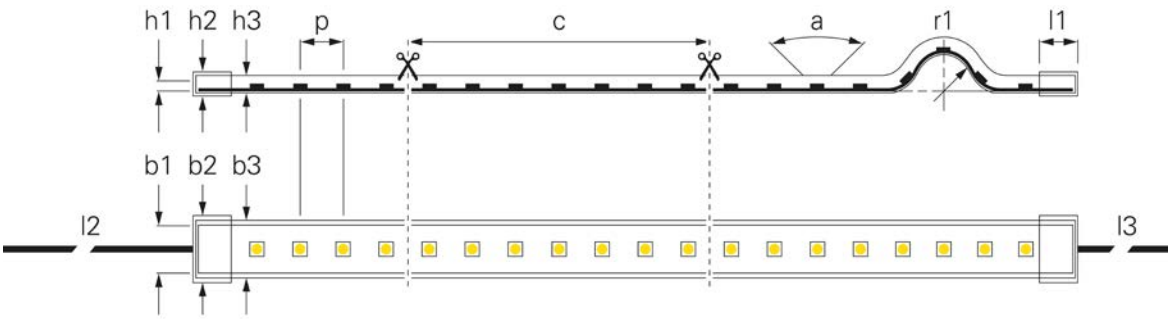

- **Including mounting material**
- **high-performance adhesive tape 3M 200MP**

(p) LED Distance	5.1 mm	Colour Temperature	3000-6500 K
(c) Segment Length	71.4 mm	Luminous Efficiency 1m	85.6 lm/W
(a) Light Beam Angle	120 Degree	Luminous Flux 1m	1070 lm
(r1) Bending Radius min.	50 mm	Length	5000 mm
(h1) Height	5.3 mm	Rated Input 1m	12.5 W
(h2) Height End Cap	5.3 mm	Rated Input Voltage	24 V/DC
(h3) Height Hose	3.7 mm	CRI (Ra)	90
(b1) Width	5 mm	Control	Dimmable via optional controller
(b2) Width end cap	10 mm	Type of IP Protection	Silicone hose
(b3) Width Hose	7.4 mm	Working Temperature	-10 to 60 °C
(l1) Length End Cap	10.2 mm	Channels	2
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m		

Article	Colour Temperature	Price
840349	WW CW 3000-6500 K	**€ 119.95**

CV | 2 CH | IP65 | A↑G | G

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-11W STANDARD IP20

RGB

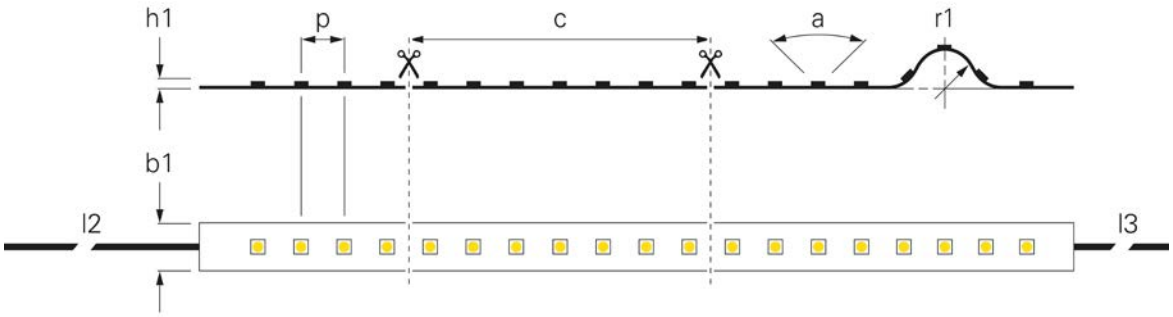

· **high-performance adhesive 3M 9448A**

(p) LED Distance	8.33 mm	Luminous Flux 1m	500 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	110 Degree	Rated Input 1m	11 W
(r1) Bending Radius min.	20 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	CRI (Ra)	60
(b1) Width	5 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-15 to 50 °C
Luminous Efficiency 1m	45.45 lm/W	Channels	3

Article		Price
840276	RGB	**€ 87.95**

CV | 3 CH | IP20

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-11W STANDARD IP67

IP67 Ra>90

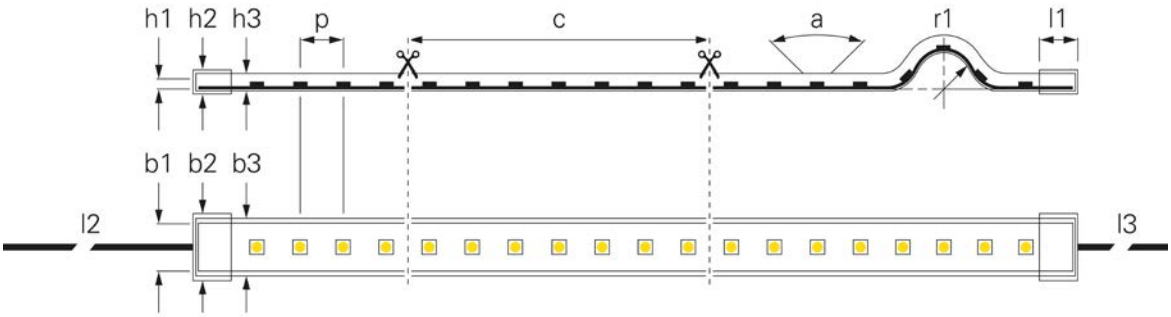

- **Including mounting material**
- **high-performance adhesive 3M 9448A**

(p) LED Distance	5.5 mm	(l2) Primary Cable Length	1 m
(c) Segment Length	33.3 mm	(l3) Secondary Cable Length	1 m
(a) Light Beam Angle	120 Degree	Length	5000 mm
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	5.5 mm	CRI (Ra)	90
(h2) Height End Cap	6.5 mm	Control	Dimmable via optional controller
(h3) Height Hose	5.5 mm		
(b1) Width	11.5 mm	Type of IP Protection	Silicone hose
(b2) Width end cap	12.5 mm	Working Temperature	-15 to 50 °C
(b3) Width Hose	11.5 mm	Channels	1
(l1) Length End Cap	10 mm		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	EEI	Price
840186	WW	2700 K	78.26 lm/W	900 lm	11.5 W	G	**€ 147.95**
840187	WW	3000 K	84.55 lm/W	930 lm	11.0 W	F	**€ 147.95**

CV | 1 CH | IP67

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-13W STANDARD IP20

RGB

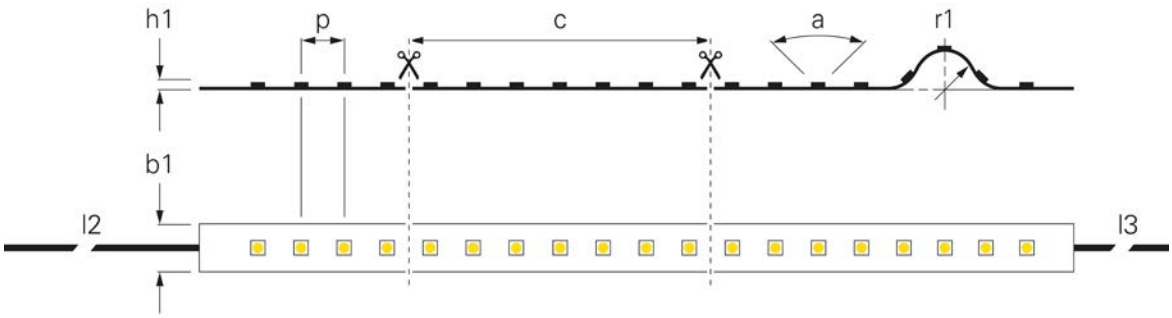

· **high-performance adhesive 3M 9448A**

(p) LED Distance	16.66 mm
(c) Segment Length	100 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	20 mm
(h1) Height	3 mm
(b1) Width	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Luminous Efficiency 1m	44.62 lm/W

Luminous Flux 1m	580 lm
Length	5000 mm
Rated Input 1m	13 W
Rated Input Voltage	24 V/DC
Control	Dimmable via optional controller
Working Temperature	-15 to 50 °C
Channels	3

Article	Price
840254 RGB	**€ 107.95**

CV | 3 CH | IP20

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-13W STANDARD IP67

IP67 RGB

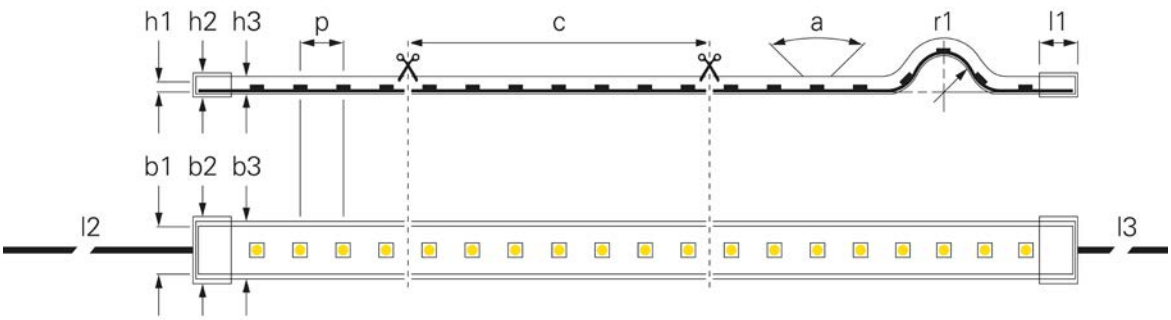

- **Including mounting material**
- **high-performance adhesive 3M 9448A**

(p) LED Distance	16.66 mm
(c) Segment Length	100 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	6 mm
(h2) Height End Cap	6.5 mm
(h3) Height Hose	5.5 mm
(b1) Width	13 mm
(b2) Width end cap	15.5 mm
(b3) Width Hose	14.5 mm
(l1) Length End Cap	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Luminous Efficiency 1m	49.6 lm/W
Luminous Flux 1m	670 lm
Length	5000 mm
Rated Input 1m	13.5 W
Rated Input Voltage	24 V/DC
Control	Dimmable via optional controller
Type of IP Protection	Silicone hose
Working Temperature	-15 to 50 °C
Channels	3

Article		Price
840256	RGB	**€ 127.95**

CV | 3 CH | IP67

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-14W STANDARD IP20

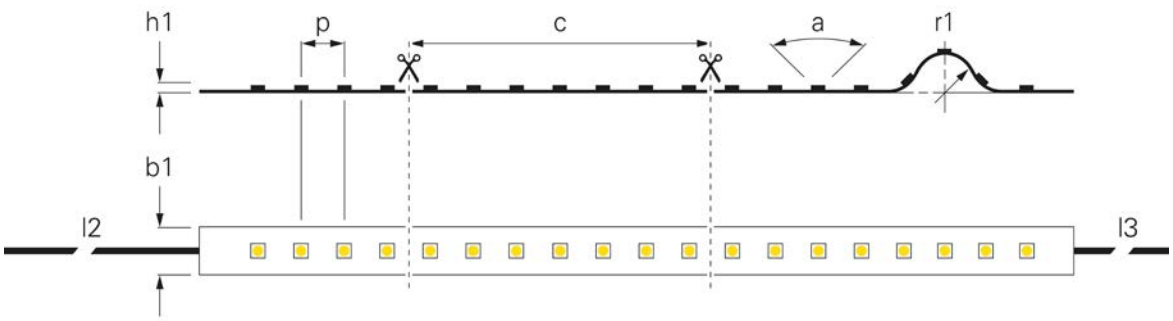

· **high-performance adhesive 3M 9448A**

(a) Light Beam Angle	120 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m		

Article		Colour Temperature	(p) LED Distance	(c) Segment Length	(h1) Height	(b1) Width	EEI	Price
840147	RGB		10.4 mm	83.3 mm	2 mm	10 mm		**€ 135.95**
840178	WW	2700 K	5.56 mm	33.4 mm	3 mm	8 mm	G	**€ 99.95**
840179	WW	3000 K	5.56 mm	33.4 mm	3 mm	8 mm	G	**€ 99.95**
930512	WW	3000 K	5.56 mm	33.4 mm	3 mm	8 mm	G	**€ 935.95**
840180	NW	4000 K	5.56 mm	33.4 mm	3 mm	8 mm	F	**€ 99.95**

CV IP20

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-15W STANDARD IP67

IP67 RGBWW

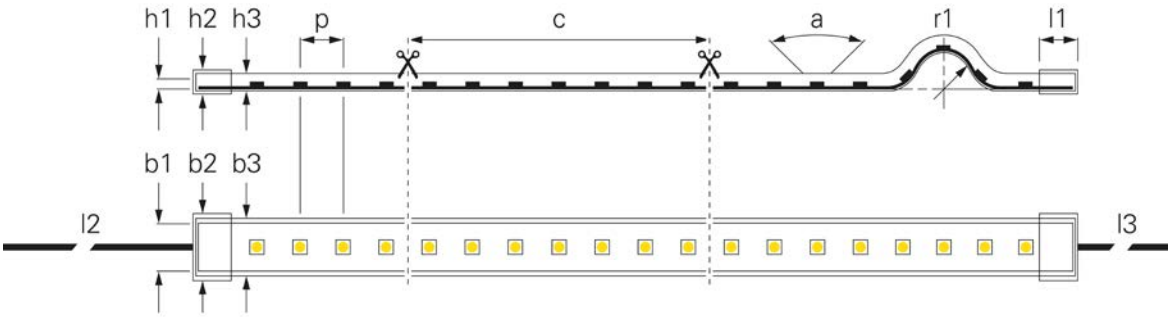

- **Including mounting material**
- **high-performance adhesive 3M 9448A**

(p) LED Distance	16.7 mm
(c) Segment Length	100 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	5.5 mm
(h2) Height End Cap	6.5 mm
(h3) Height Hose	5.5 mm
(b1) Width	14.5 mm
(b2) Width end cap	15.5 mm
(b3) Width Hose	14.5 mm
(l1) Length End Cap	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m

Colour Temperature	3000 K
Luminous Efficiency 1m	49 lm/W
Luminous Flux 1m	740 lm
Length	5000 mm
Rated Input 1m	15 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	Silicone hose
Working Temperature	-15 to 50 °C
Channels	4

Article		Price
840239	RGB WW	**€ 139.95**

CV | 4 CH | IP67 | A ↑ G | G

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24 V-16 W RGBNW STANDARD IP20

RGBNW

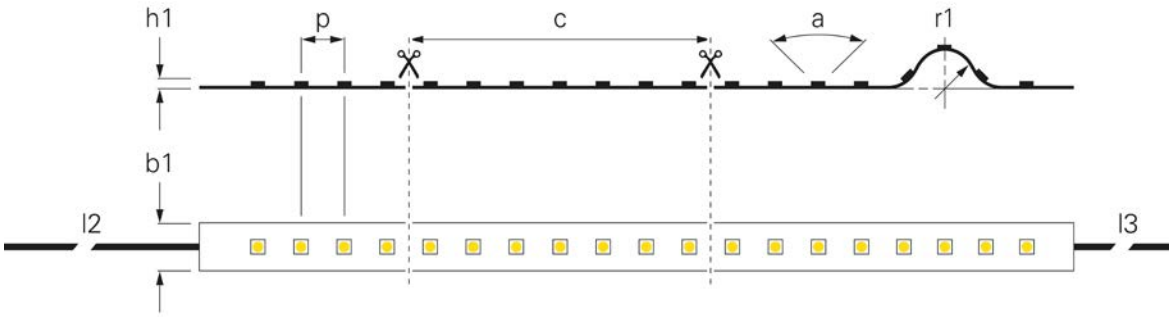

- **high-performance adhesive tape 3M 200MP**

(p) LED Distance	16.66 mm
(c) Segment Length	166.66 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	2 mm
(h2) Height End Cap	3 mm
(b1) Width	10 mm
(b2) Width end cap	10.5 mm
(l1) Length End Cap	15 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m

Colour Temperature	4000 K
Luminous Efficiency 1m	46.97 lm/W
Luminous Flux 1m	775 lm
Length	5000 mm
Rated Input 1m	16.5 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Working Temperature	-10 to 60 °C
Channels	4

Article		Price
840353	RGB NW	**€ 119.95**

CV | 4 CH | IP20 | A ↑ G | G

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-16W RGBWW STANDARD IP20

RGBWW

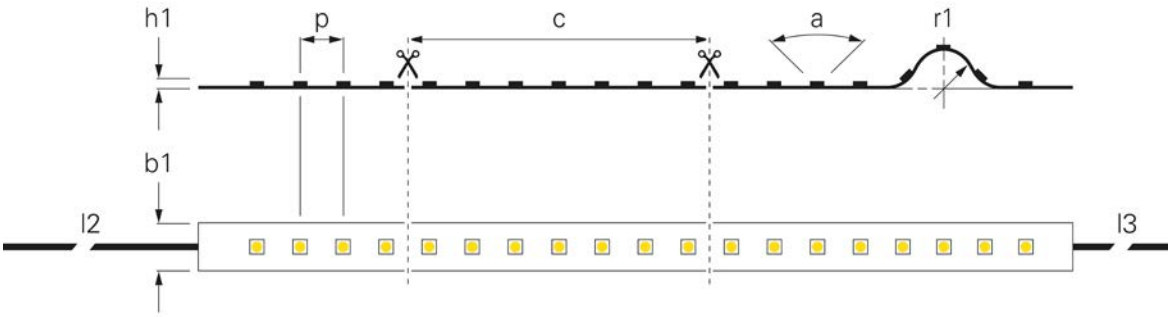

·high-performance adhesive 3M 9448A

(p) LED Distance	16.66 mm	Luminous Efficiency 1m	51.25 lm/W
(c) Segment Length	100 mm	Luminous Flux 1m	820 lm
(a) Light Beam Angle	120 Degree	Rated Input 1m	16 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	3 mm	CRI (Ra)	80
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-15 to 50 °C
Colour Temperature	3000 K	Channels	4

Article		(h3) Height Hose	(b3) Width Hose	Length	Price
840236	RGB WW			5000 mm	**€ 115.95**
930517	RGB WW	2 mm	10 mm	50000 mm	**€ 1039.95**

CV | 4 CH | IP20 | A ↑ G | G

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-16W STANDARD IP44

IP44 RGBNW

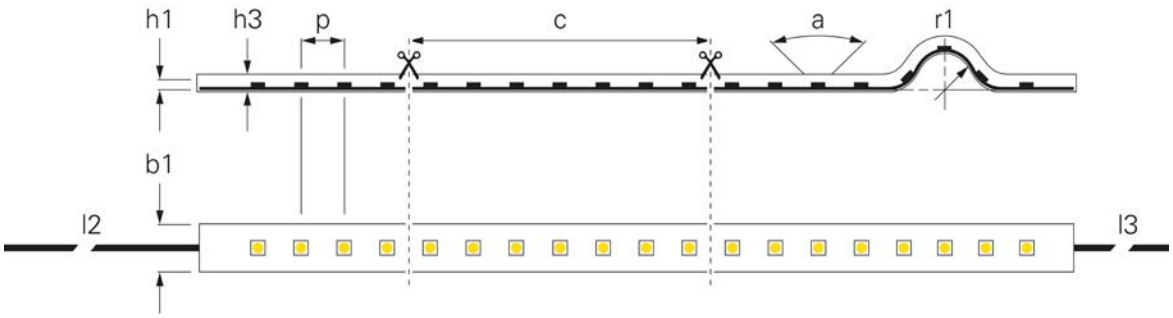

· high-performance adhesive tape 3M 200MP

(p) LED Distance	16.66 mm
(c) Segment Length	166.66 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	2.6 mm
(h2) Height End Cap	3 mm
(h3) Height Hose	2.6 mm
(b1) Width	10 mm
(b2) Width end cap	10.5 mm
(b3) Width Hose	10 mm
(l1) Length End Cap	15 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m

Colour Temperature	4000 K
Luminous Efficiency 1m	47.81 lm/W
Luminous Flux 1m	765 lm
Length	5000 mm
Rated Input 1m	16 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	Silicone
Working Temperature	-10 to 60 °C
Channels	4

Article		Price
840373	RGB NW	**€ 127.95**

CV | 4 CH | IP44 | A ↑ G | G

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-17W STANDARD IP20

CCT Ra>90



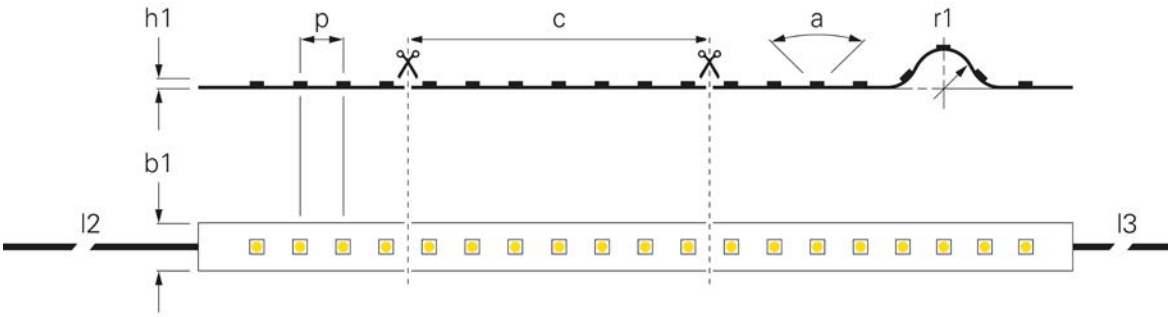

(p) LED Distance	7.11 mm	Luminous Flux 1m	1765 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	17.2 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-10 to 40 °C
Colour Temperature	2700-6500 K	Channels	2
Luminous Efficiency 1m	103 lm/W		

Article	Colour Temperature	Price
840378	WW CW 2700-6500 K	**€ 159.95**

CV | 2 CH | IP20 | A ↑ G | F

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-20W POWER IP20

Ra>90

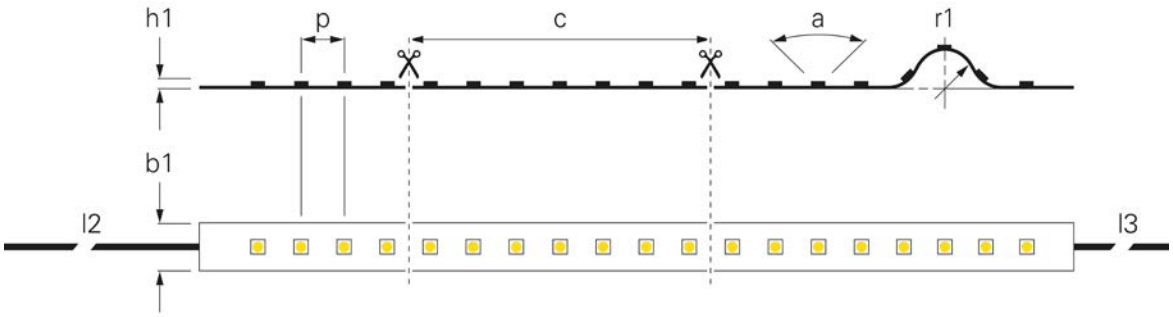

· **high-performance adhesive 3M 9448A**

(a) Light Beam Angle	120 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	CRI (Ra)	90
(h1) Height	2 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	1
Length	5000 mm		

Article		Colour Temperature	(p) LED Distance	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	EEI	Price
840192	WW	2700 K	4.16 mm	25 mm	65.68 lm/W	1215 lm	G	**€ 131.95**
840193	WW	3000 K	4.16 mm	25 mm	84.47 lm/W	1605 lm	G	**€ 131.95**
840194	NW	4000 K	4.16 mm	25 mm	88.5 lm/W	1770 lm	F	**€ 131.95**
840124	CW	6000 K	8.33 mm	50 mm	86 lm/W	1720 lm	G	**€ 155.95**

CV | 1 CH | IP20

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-23W POWER IP20

Ra>90

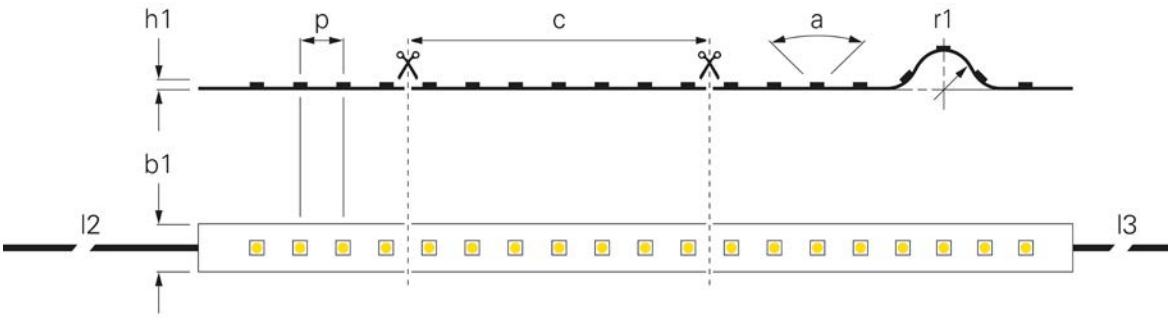

·high-performance adhesive 3M 9448A

(p) LED Distance	6.25 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input 1m	23 W
(a) Light Beam Angle	110 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	CRI (Ra)	90
(h1) Height	2 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	1

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840331	WW	3000 K	130.9 lm/W	3010 lm	**€ 199.95**
840332	NW	4000 K	136.1 lm/W	3130 lm	**€ 199.95**

CV | 1 CH | IP20 | A ↑ G | E

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-23W POWER IP44

IP44 Ra>90

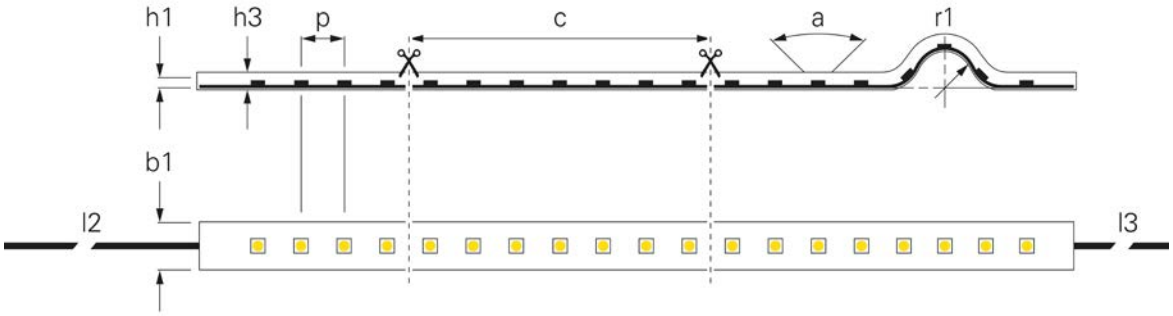

· **high-performance adhesive 3M 9448A**

(p) LED Distance	6.25 mm	Rated Input 1m	23 W
(c) Segment Length	50 mm	Rated Input Voltage	24 V/DC
(a) Light Beam Angle	110 Degree	CRI (Ra)	90
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(h1) Height	3 mm		
(b1) Width	10 mm	Type of IP Protection	Silicone
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	1
Length	5000 mm		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840333	WW	3000 K	115.2 lm/W	2650 lm	**€ 207.95**
840334	NW	4000 K	120.9 lm/W	2780 lm	**€ 207.95**



Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24 V-22 W RGBW POWER IP20

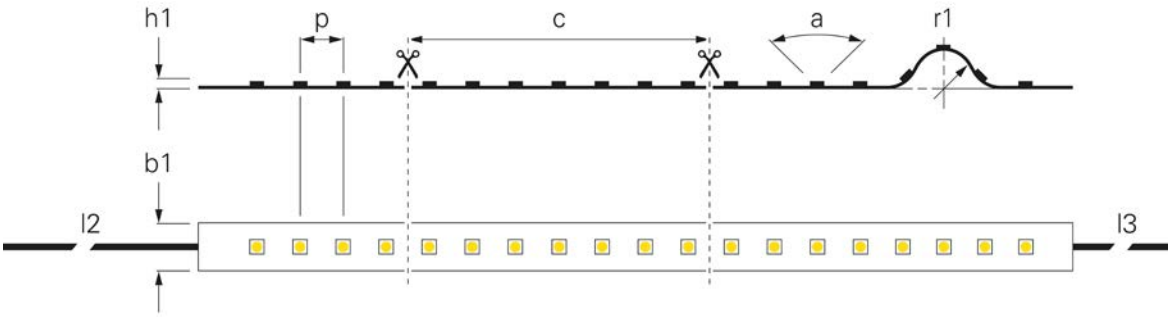

·high-performance adhesive 3M 9448A

(p) LED Distance	10.4 mm	Length	5000 mm
(c) Segment Length	62.5 mm	Rated Input 1m	22 W
(a) Light Beam Angle	110 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	CRI (Ra)	60
(h1) Height	2 mm	Control	Dimmable via optional controller
(b1) Width	12 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	4

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840308	RGB WW	3000 K	43.41 lm/W	955 lm	**€ 143.95**
840309	RGB NW	4000 K	44.77 lm/W	985 lm	**€ 143.95**

CV | 4 CH | IP20 | A ↑ G | G

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SIDE VIEW

The LED strip is arranged / installed vertically, allowing the Flex-Stripe to be bent to the left and right.
[Note the minimum bending radius in each case.]

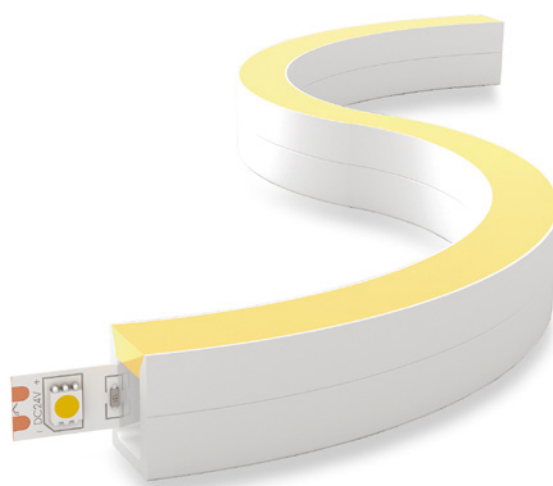

NEON 24 V-10 W RGBW D FLEX LINE TOP-VIEW IP68

IP68 RGBWW

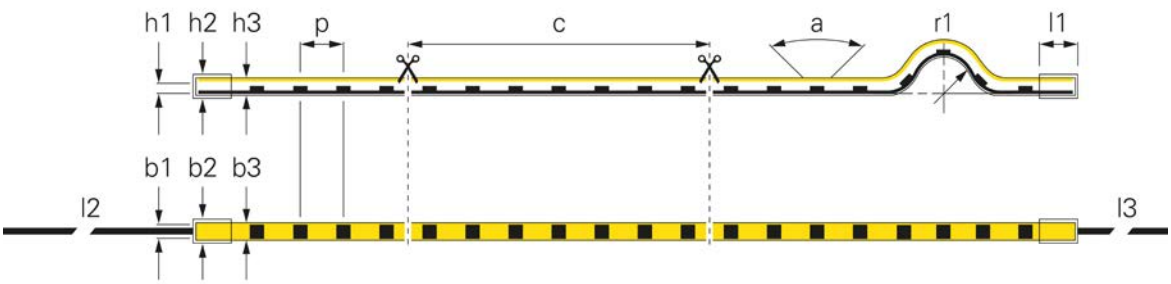

- **Spot-free homogeneous illumination**
- **Very easy installation using adapted profile**
- **UV and salt water-resistant IP68**
- **Ultra-flexible and therefore very versatile**
- **Light-fast polyurethane encapsulation**

(p) LED Distance	11.9 mm	Colour Temperature	3000 K
(c) Segment Length	71.43 mm	Luminous Efficiency 1m	30.48 lm/W
(a) Light Beam Angle	117 Degree	Luminous Flux 1m	320 lm
(r1) Bending Radius min.	150 mm	Length	5000 mm
(h1) Height	15 mm	Rated Input 1m	10.5 W
(h2) Height End Cap	18 mm	Rated Input Voltage	24 V/DC
(h3) Height Hose	15 mm	CRI (Ra)	80
(b1) Width	16 mm	Control	Dimmable via optional controller
(b2) Width end cap	18 mm		
(b3) Width Hose	16 mm	Type of IP Protection	PVC cover
(l1) Length End Cap	11.5 mm	Working Temperature	-25 to 45 °C
(l2) Primary Cable Length	3 m	Channels	4
(l3) Secondary Cable Length	3 m		

Article		Price
840289	RGB WW	**€ 623.95**

CV | 4 CH | IP68 max.2m | A ↑ G | G

Accessories

930448	Profile for D Flex Line TOP		**€ 11.95**
930449	Profile for D Flex Line TOP		**€ 9.95**
930533	Assembly kit for D Flex Line 16.0 x 15.0 mm		**€ 8.95**
930593	Gel adhesive for bonding the end caps 3 g		**€ 4.95**

NEON 24V-8W OMNIFLEX MINI IP67

The OMNIFLEX 24 V 8W IP67 LED strip is available in three different light colors [2,700 K, 3,000 K, 4,000 K]. With a length of 5 meters, it enables flexible use in different areas. Uniform illumination is guaranteed thanks to the point-free light distribution. The very small bending radii in all directions allow a great deal of design freedom when creating shapes. Straight lines are also no problem. All variants are possible thanks to the extensive range of accessories. With a primary and secondary feed of 300 cm each, flexible installation is guaranteed. Thanks to its salt water and UV resistance and IP67 protection rating, the OMNIFLEX LED strip is also ideal for outdoor use.

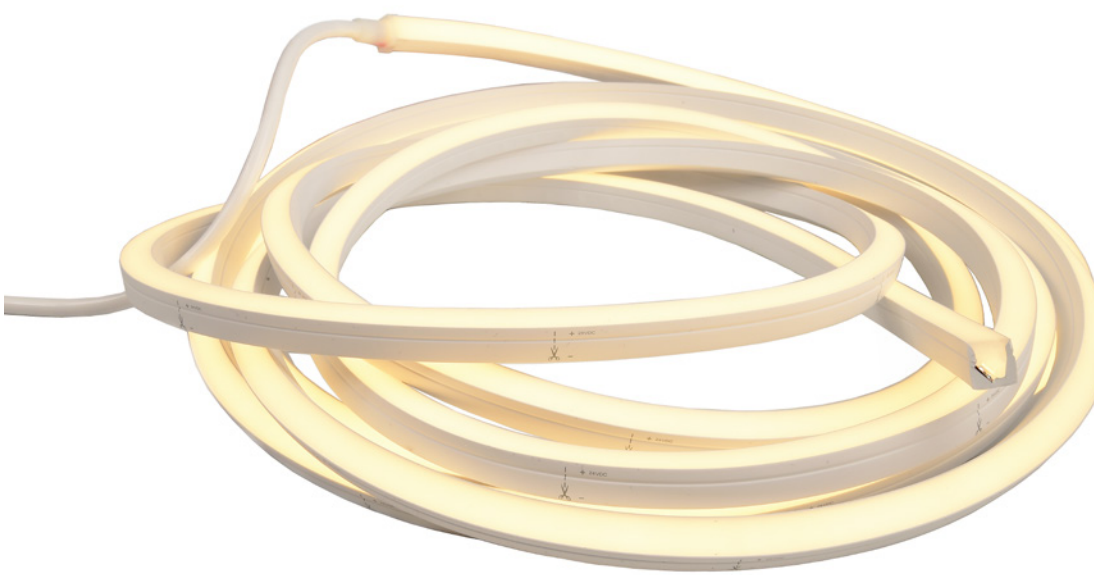

NEON 24V-8W OMNIFLEX MINI IP67

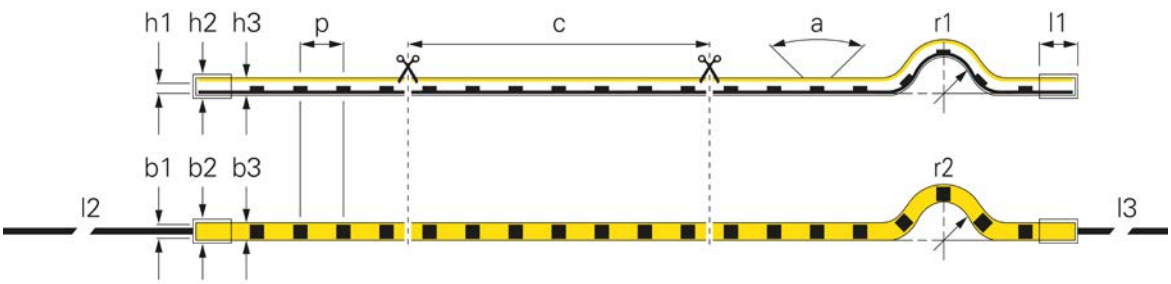

- **Spot-free light pattern for homogeneous illumination**
- **Neon effect**
- **Small bending radius in all directions provides a great deal of freedom**
- **Minimum bending radius to the front: 60 mm/to the side: 100 mm**
- **300 cm long primary and secondary infeed**
- **UV- and salt water-resistant**
- **A comprehensive range of accessories enables you to customise your design**
- **Including mounting material**

(p) LED Distance	6.25 mm	(l2) Primary Cable Length	3 m
(c) Segment Length	100 mm	(l3) Secondary Cable Length	3 m
(a) Light Beam Angle	120 Degree	Length	5000 mm
(r1) Bending Radius min.	100 mm	Rated Input 1m	8 W
(r2) Bending Radius Left / Right	60 mm	Rated Input Voltage	24 V/DC
(h1) Height	10 mm	CRI (Ra)	80
(h2) Height End Cap	10 mm	Control	Dimmable via optional controller
(h3) Height Hose	10 mm		
(b1) Width	10 mm	Type of IP Protection	Silicone hose
(b2) Width end cap	10 mm	Working Temperature	-10 to 55 °C
(b3) Width Hose	10 mm	Channels	1
(l1) Length End Cap	10 mm		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	EEI	Price
840417	WW	2700 K	90 lm/W	720 lm	G	**€ 239.95**
840418	WW	3000 K	93 lm/W	744 lm	G	**€ 239.95**
840419	NW	4000 K	100 lm/W	800 lm	F	**€ 239.95**

Accessories

930846	Assembly clamps set of 10 pieces for neon Omniflex Mini	**€ 3.95**
930847	Aluminium profile 1 m for neon Omniflex Mini	**€ 7.95**
930849	Flexible stainless steel profile 5 m for neon Omniflex Mini	**€ 55.95**

48V LED STRIPES

Our new LED stripes in 48V technology offer users numerous advantages. The key advantage: Compared to 12V and 24V stripes, 48V stripes allow longer running lengths. By comparison, conventional LED stripes with lower output voltage require a new feed after only 2.5 metres [single-sided feed] or 5 metres [feed from both sides], for continuous operation. LED stripes with 48V can be used up to a length of 25 metres [single-sided feed] or feed] or 50 metres [feed on both sides] - perfect for lighting coves, long corridors and simplified integration into existing installations, that only allow a single-sided feed.

Advantages of 48V LED stripes

- 48V = lower current
- 48V = longer running length
- 48V = thinner wire cross-sections
- 48V = faster installation
- 48V = more versatile applications
- 48V = lower brightness drop

In addition to the advantages mentioned above, our new 48V LED stripes have a very long service life of up to 75,000h for L70B50 and 50,000h for L80B10. Thanks to reel-to-reel production, the 48V LED stripes have no soldered joints. As we have set ourselves the goal to become climate-neutral, the LED stripes are packaged in an environmentally friendly paper-based packaging.

In addition to the new 48V LED stripes, we of course also offer accessories in the form of power supply units and controllers for the relevant control protocols [RF, DALI, KNX etc.] in order to cover all potential future applications for 48V stripes.

Foto: Daniel Vieser, Architekturfotografie, Karlsruhe

SMD 48V-10W LONG RUN CCT IP20

CCT Ra>90 SDCM<3

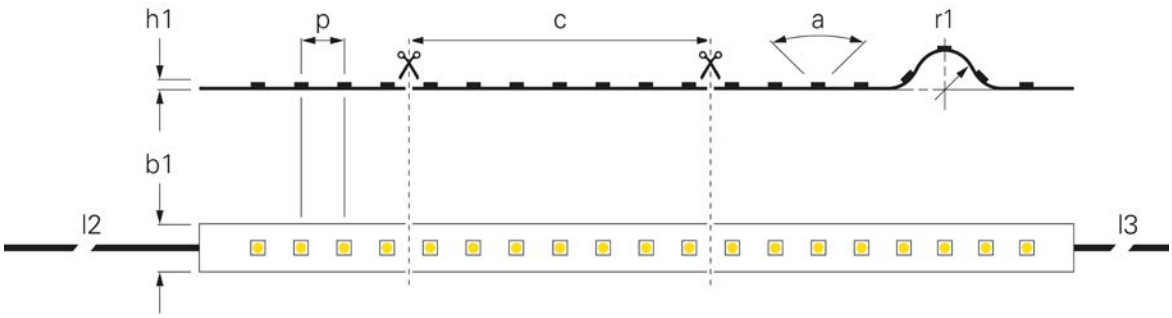

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(p) LED Distance	4.46 mm	Luminous Efficiency 1m	120 lm/W
(c) Segment Length	125 mm	Luminous Flux 1m	1200 lm
(a) Light Beam Angle	120 Degree	Rated Input 1m	10 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	48 V/DC
(h1) Height	2.5 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-10 to 55 °C
Colour Temperature	2700-6500 K	Channels	2

Article			Length	Price
840438	WW	CW	5000 mm	**€ 155.95**
840434	WW	CW	15000 mm	**€ 467.95**
840436	WW	CW	50000 mm	**€ 1559.95**

CV | 2 CH | IP20 | A↑G E

SMD 48V-10W LONG RUN CCT IP67

CCT IP67 Ra>90 SDCM<3

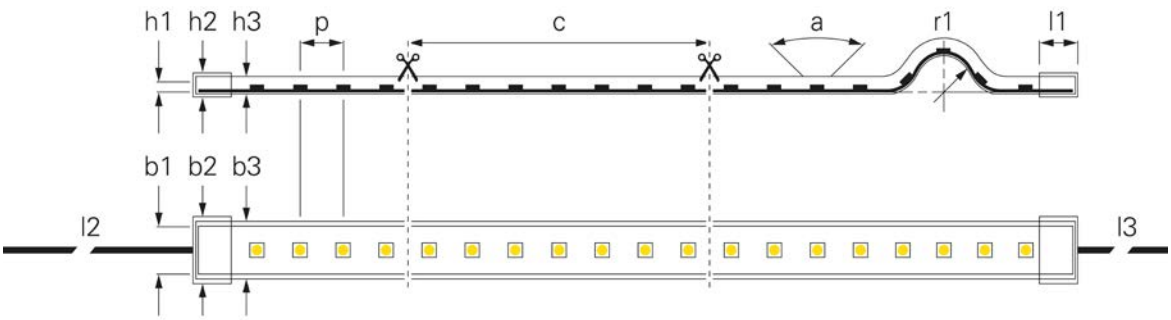

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(p) LED Distance	4.46 mm	(l3) Secondary Cable Length	1 m
(c) Segment Length	125 mm	Colour Temperature	2700-6500 K
(a) Light Beam Angle	120 Degree	Luminous Efficiency 1m	110 lm/W
(r1) Bending Radius min.	50 mm	Luminous Flux 1m	1100 lm
(h1) Height	2.5 mm	Rated Input 1m	10 W
(h2) Height End Cap	6.5 mm	Rated Input Voltage	48 V/DC
(h3) Height Hose	5 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(b2) Width end cap	14.2 mm		
(b3) Width Hose	12 mm	Type of IP Protection	Silicone hose
(l1) Length End Cap	10 mm	Working Temperature	-10 to 55 °C
(l2) Primary Cable Length	1 m	Channels	2

Article			Length	Price
840439	WW	CW	5000 mm	**€ 171.95**
840435	WW	CW	15000 mm	**€ 515.95**
840437	WW	CW	50000 mm	**€ 1719.95**

CV | 2 CH | IP67 | A ↑ G | E

SMD 48V-10W LONG RUN RGB+CCT IP20

Ra>90 RGB+CCT SDCM<3

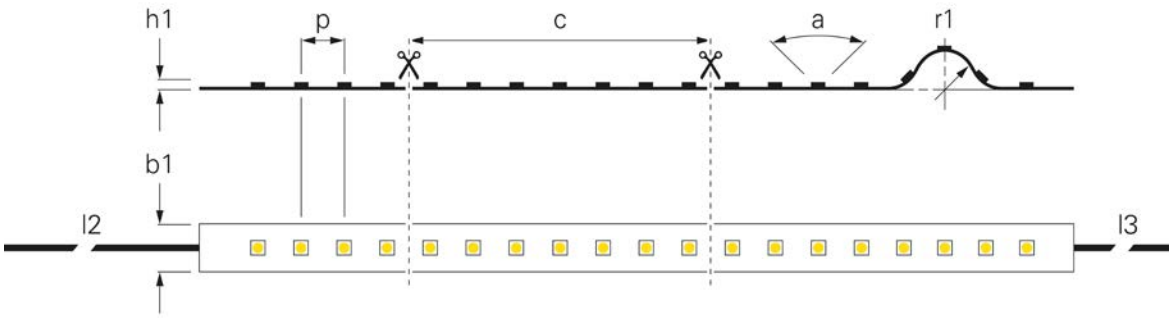

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(p) LED Distance	5.56 mm	Luminous Efficiency 1m	80 lm/W
(c) Segment Length	167 mm	Luminous Flux 1m	800 lm
(a) Light Beam Angle	120 Degree	Rated Input 1m	10 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	48 V/DC
(h1) Height	2.5 mm	CRI (Ra)	90
(b1) Width	12 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-10 to 55 °C
Colour Temperature	2700-6500 K	Channels	5

Article		Length	Price
840452	RGB WW CW	5000 mm	**€ 199.95**
840448	RGB WW CW	15000 mm	**€ 599.95**
840450	RGB WW CW	50000 mm	**€ 1999.95**

CV 5 CH IP20 A↑G E

SMD 48V-10W LONG RUN RGB+CCT IP67

IP67 Ra>90 RGB+CCT SDCM<3

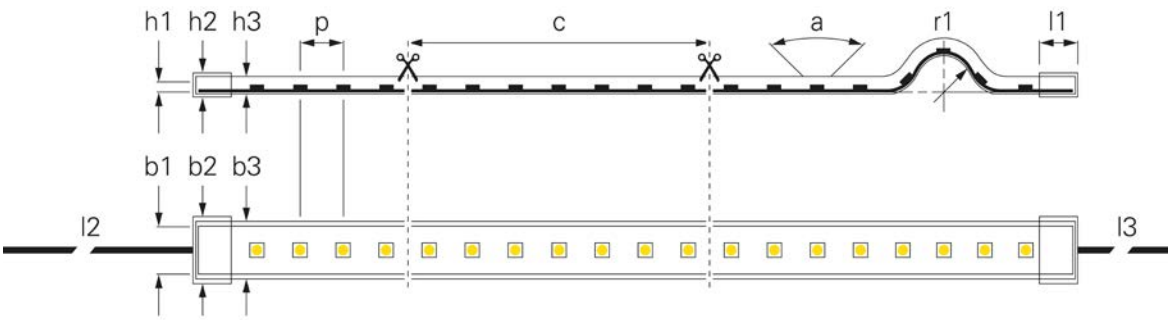

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(p) LED Distance	5.56 mm	(l3) Secondary Cable Length	1 m
(c) Segment Length	167 mm	Colour Temperature	2700-6500 K
(a) Light Beam Angle	120 Degree	Luminous Efficiency 1m	75 lm/W
(r1) Bending Radius min.	50 mm	Luminous Flux 1m	750 lm
(h1) Height	2.5 mm	Rated Input 1m	10 W
(h2) Height End Cap	6.5 mm	Rated Input Voltage	48 V/DC
(h3) Height Hose	6 mm	CRI (Ra)	90
(b1) Width	12 mm	Control	Dimmable via optional controller
(b2) Width end cap	16.5 mm		
(b3) Width Hose	14.5 mm	Type of IP Protection	Silicone hose
(l1) Length End Cap	10 mm	Working Temperature	-10 to 55 °C
(l2) Primary Cable Length	1 m	Channels	5

Article		Length	Price
840453	RGB WW CW	5000 mm	**€ 219.95**
840449	RGB WW CW	15000 mm	**€ 659.95**
840451	RGB WW CW	50000 mm	**€ 2199.95**

CV 5 CH IP67 A↑G F

SMD 48V-10W LONG RUN RGB+W IP20

Ra>90 SDCM<3

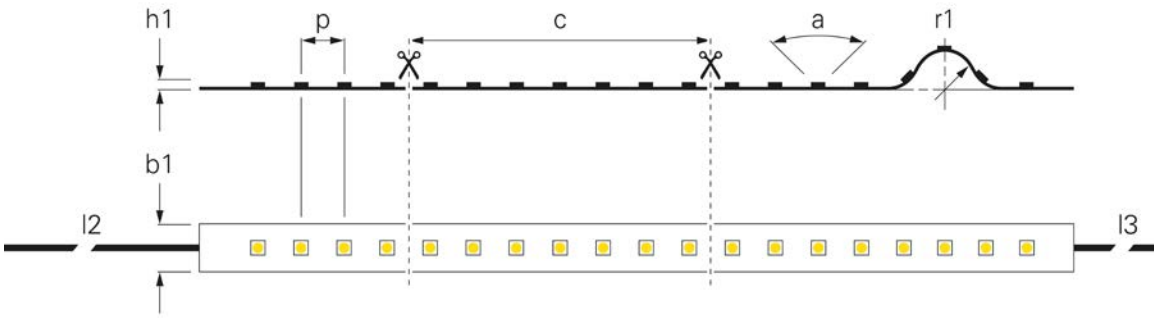

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(p) LED Distance	8.9 mm	Rated Input 1m	10 W
(c) Segment Length	125 mm	Rated Input Voltage	48 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(h1) Height	2.5 mm		
(b1) Width	12 mm	Working Temperature	-10 to 55 °C
(l2) Primary Cable Length	1 m	Channels	4
(l3) Secondary Cable Length	1 m		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	EEI	Price
840458	RGB WW	3000 K	66 lm/W	660 lm	5000 mm	G	**€ 199.95**
840454	RGB WW	3000 K	66 lm/W	660 lm	15000 mm	G	**€ 599.95**
840456	RGB WW	3000 K	66 lm/W	660 lm	50000 mm	G	**€ 1999.95**
840464	RGB NW	4000 K	70 lm/W	700 lm	5000 mm	F	**€ 199.95**
840460	RGB NW	4000 K	70 lm/W	700 lm	15000 mm	F	**€ 599.95**
840462	RGB NW	4000 K	70 lm/W	700 lm	50000 mm	F	**€ 1999.95**

CV | 4 CH | IP20

SMD 48V-10W LONG RUN RGB+W IP67

IP67 Ra>90 SDCM<3

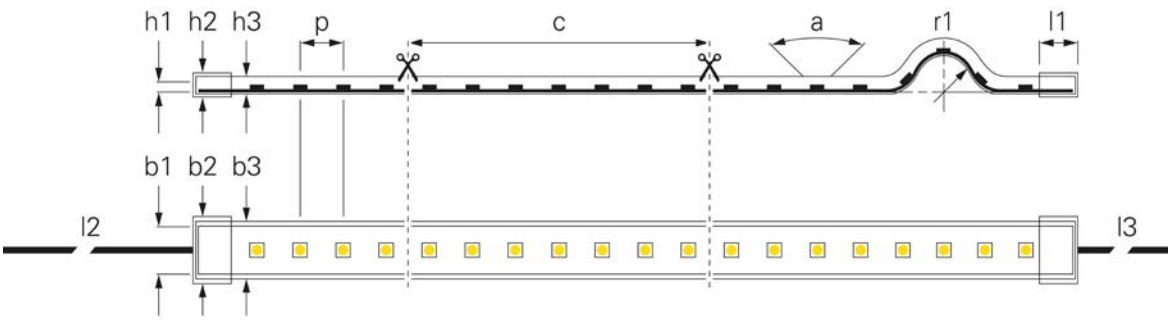

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(c) Segment Length	125 mm	(l2) Primary Cable Length	1 m
(a) Light Beam Angle	120 Degree	(l3) Secondary Cable Length	1 m
(r1) Bending Radius min.	50 mm	Rated Input 1m	10 W
(h1) Height	2.5 mm	Rated Input Voltage	48 V/DC
(h2) Height End Cap	6.5 mm	CRI (Ra)	90
(h3) Height Hose	6 mm	Control	Dimmable via optional controller
(b1) Width	14.5 mm		
(b2) Width end cap	16.5 mm	Type of IP Protection	Silicone hose
(b3) Width Hose	14.5 mm	Working Temperature	-10 to 55 °C
(l1) Length End Cap	10 mm	Channels	4

Article		Colour Temperature	(p) LED Distance	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840459	RGB WW	3000 K	8.9 mm	60 lm/W	600 lm	5000 mm	**€ 219.95**
840455	RGB WW	3000 K	8.9 mm	60 lm/W	600 lm	15000 mm	**€ 659.95**
840457	RGB WW	3000 K	8.9 mm	60 lm/W	600 lm	50000 mm	**€ 2199.95**
840463	RGB NW	4000 K	5.5 mm	65 lm/W	650 lm	50000 mm	**€ 2199.95**
840465	RGB NW	4000 K	8.9 mm	65 lm/W	650 lm	5000 mm	**€ 219.95**
840461	RGB NW	4000 K	8.9 mm	65 lm/W	650 lm	15000 mm	**€ 659.95**

CV | 4 CH | IP67 | A↑G | F

SMD 48V-10W LONG RUN RGB IP20

RGB

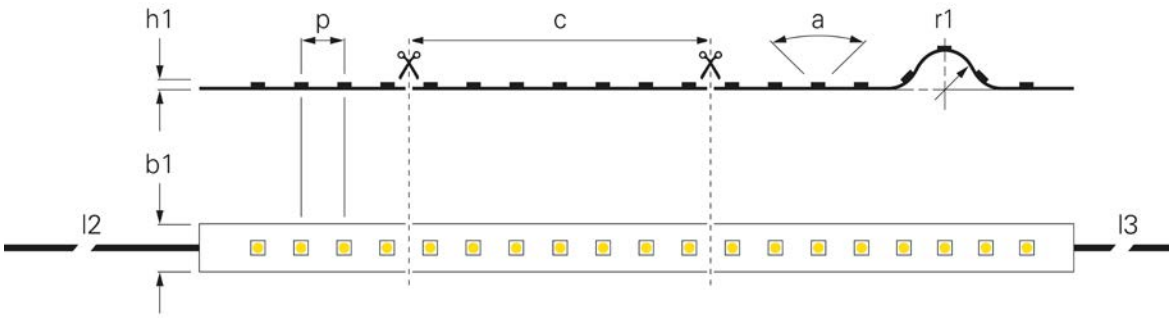

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(p) LED Distance	7.14 mm	Luminous Flux 1m	550 lm
(c) Segment Length	100 mm	Rated Input 1m	10 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	CRI (Ra)	65
(h1) Height	2.5 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 55 °C
(l3) Secondary Cable Length	1 m	Channels	3
Luminous Efficiency 1m	55 lm/W		

Article		Length	Price
840446	RGB	5000 mm	**€ 107.95**
840399	RGB	15000 mm	**€ 319.95**
840407	RGB	50000 mm	**€ 1063.95**

CV | 3 CH | IP20

SMD 48V-10W LONG RUN RGB IP67

IP67 RGB

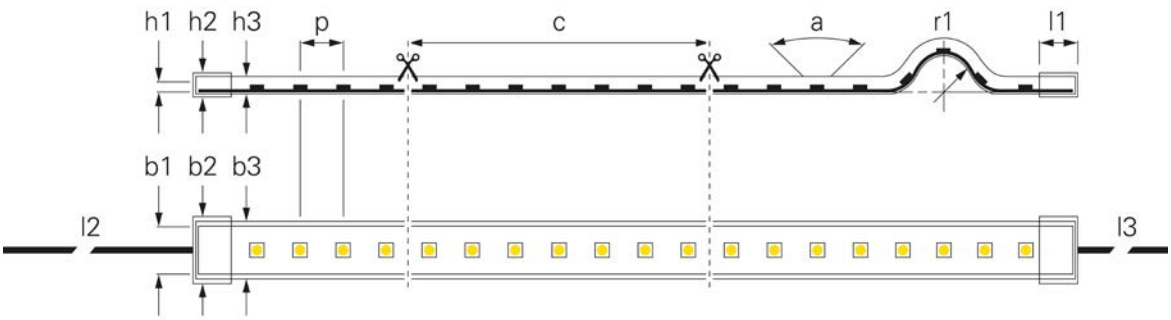

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(p) LED Distance	7.14 mm	(l3) Secondary Cable Length	1 m
(a) Light Beam Angle	120 Degree	Luminous Efficiency 1m	51 lm/W
(r1) Bending Radius min.	50 mm	Luminous Flux 1m	510 lm
(h1) Height	2.5 mm	Rated Input 1m	10 W
(h2) Height End Cap	6.5 mm	Rated Input Voltage	48 V/DC
(h3) Height Hose	4.5 mm	CRI (Ra)	65
(b1) Width	10 mm	Control	Dimmable via optional controller
(b2) Width end cap	14.2 mm		
(b3) Width Hose	12 mm	Working Temperature	-10 to 55 °C
(l1) Length End Cap	10 mm	Channels	3
(l2) Primary Cable Length	1 m		

Article		(c) Segment Length	Length	Type of IP Protection	Price
840400	RGB	100 mm	15000 mm	Silicone hose	**€ 367.95**
840408	RGB	100 mm	50000 mm	Silicone hose	**€ 1223.95**
840447	RGB	125 mm	5000 mm		**€ 119.95**

CV | 3 CH | IP67

SMD 48V-10W LONG RUN SINGLE IP20

Ra>90 SDCM<3

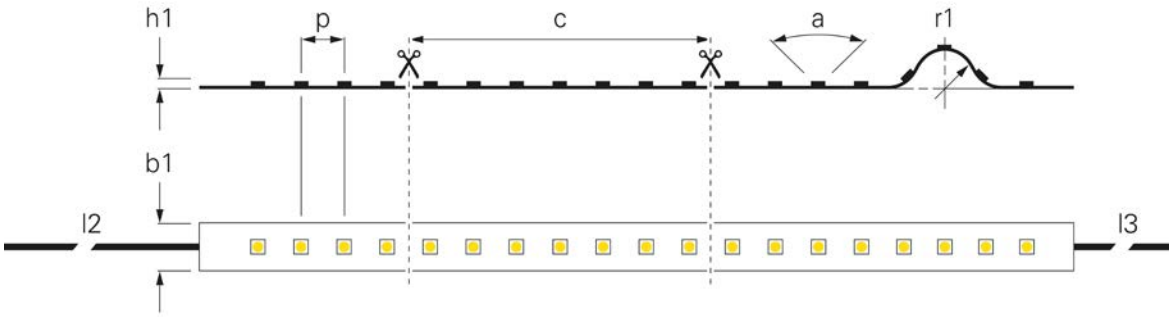

- **ideal solution for long distances (up to 50m)**
- **fewer power supply points required**
- **smaller cable cross-section required compared to 12/24V**
- **up to 25m with single-ended power supply**
- **up to 50 metres with power supply at both ends**
- **reel-to-reel production process (long LED strips without any breaks)**

(p) LED Distance	7.14 mm	Rated Input 1m	10 W
(c) Segment Length	100 mm	Rated Input Voltage	48 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(h1) Height	2.5 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 55 °C
(l3) Secondary Cable Length	1 m	Channels	1

Article		Colour Temperature	(b1) Width	Luminous Efficiency 1m	Luminous Flux 1m	Length	EEI	Price
840440	WW	2700 K	10 mm	121 lm/W	1210 lm	5000 mm	F	**€ 87.95**
840393	WW	2700 K	10 mm	121 lm/W	1210 lm	15000 mm	F	**€ 271.95**
840401	WW	2700 K	10 mm	121 lm/W	1210 lm	50000 mm	F	**€ 903.95**
840394	WW	3000 K	10 mm	124 lm/W	1240 lm	15000 mm	F	**€ 271.95**
840402	WW	3000 K	10 mm	124 lm/W	1240 lm	50000 mm	F	**€ 903.95**
840442	WW	3000 K	12 mm	124 lm/W	1240 lm	5000 mm	F	**€ 87.95**
840395	NW	4000 K	10 mm	130 lm/W	1300 lm	15000 mm	E	**€ 271.95**
840403	NW	4000 K	10 mm	130 lm/W	1300 lm	50000 mm	E	**€ 903.95**
840444	NW	4000 K	12 mm	130 lm/W	1300 lm	5000 mm	E	**€ 87.95**

CV | 1 CH | IP20

SMD 48V-10W LONG RUN SINGLE IP67

IP67 Ra>90 SDCM<3

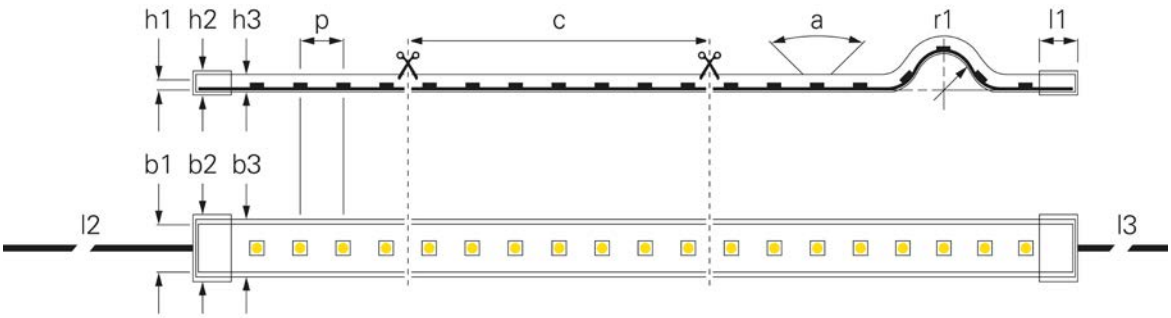

- **Ideal for coved lighting and long run lengths**
- **Up to 50 m in single section with single-/double-sided infeed**
- **3M 300 LSE [IP20] strong adhesive tape/3M VHB 5604A with primer pre-treatment [IP67]**

(p) LED Distance	7.14 mm	(l3) Secondary Cable Length	1 m
(c) Segment Length	100 mm	Rated Input 1m	10 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	CRI (Ra)	90
(h1) Height	2.5 mm	Control	Dimmable via optional controller
(h2) Height End Cap	6.5 mm		
(h3) Height Hose	4.5 mm	Type of IP Protection	Silicone hose
(b1) Width	10 mm	Working Temperature	-10 to 55 °C
(l1) Length End Cap	10 mm	Channels	1
(l2) Primary Cable Length	1 m		

Article		Colour Temperature	(b2) Width end cap	(b3) Width Hose	Luminous Efficiency 1m	Luminous Flux 1m	Price
840396	WW	2700 K	14.2 mm	12 mm	109 lm/W	1090 lm	**€ 319.95**
840404	WW	2700 K	14.2 mm	12 mm	109 lm/W	1090 lm	**€ 1059.95**
840441	WW	2700 K	14.5 mm	14.5 mm	109 lm/W	1090 lm	**€ 103.95**
840397	WW	3000 K	14.2 mm	12 mm	112 lm/W	1120 lm	**€ 319.95**
840405	WW	3000 K	14.2 mm	12 mm	112 lm/W	1120 lm	**€ 1059.95**
840443	WW	3000 K	14.5 mm	14.5 mm	112 lm/W	1120 lm	**€ 103.95**
840398	NW	4000 K	14.2 mm	12 mm	118 lm/W	1180 lm	**€ 319.95**
840406	NW	4000 K	14.2 mm	12 mm	118 lm/W	1180 lm	**€ 1059.95**
840445	NW	4000 K	14.5 mm	14.5 mm	118 lm/W	1180 lm	**€ 103.95**

CV | 1 CH | IP67 | A↑G | F

SMD 48V-4W LONG RUN SINGLE IP20

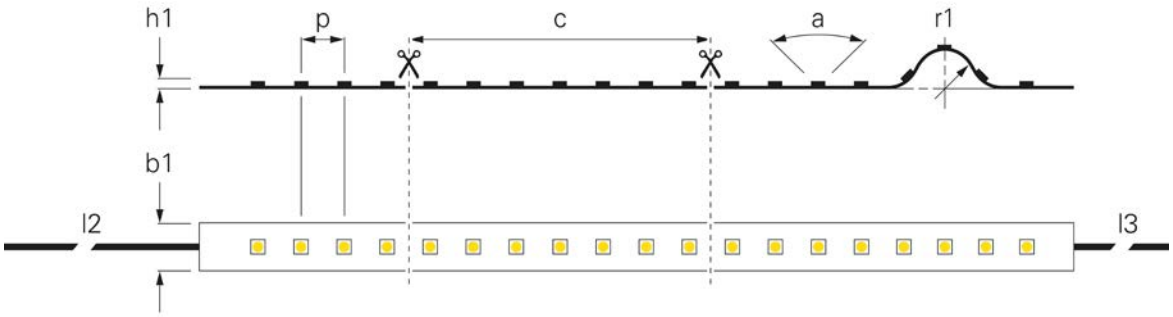

· high-performance adhesive tape 3M 200MP

(p) LED Distance	12.82 mm	(l2) Primary Cable Length	1 m
(c) Segment Length	166.66 mm	(l3) Secondary Cable Length	1 m
(a) Light Beam Angle	120 Degree	Rated Input 1m	4 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	48 V/DC
(h1) Height	1.3 mm	CRI (Ra)	80
(h2) Height End Cap	2.8 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(b2) Width end cap	10.5 mm	Working Temperature	-15 to 50 °C
(l1) Length End Cap	15 mm	Channels	1

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840318	WW 3000 K	121 lm/W	485 lm	15000 mm	**€ 231.95**
840337	WW 3000 K	121 lm/W	485 lm	50000 mm	**€ 799.95**
840320	NW 4000 K	133 lm/W	530 lm	15000 mm	**€ 231.95**
840339	NW 4000 K	133 lm/W	530 lm	50000 mm	**€ 799.95**

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 48V-4W LONG RUN SINGLE IP44

IP44

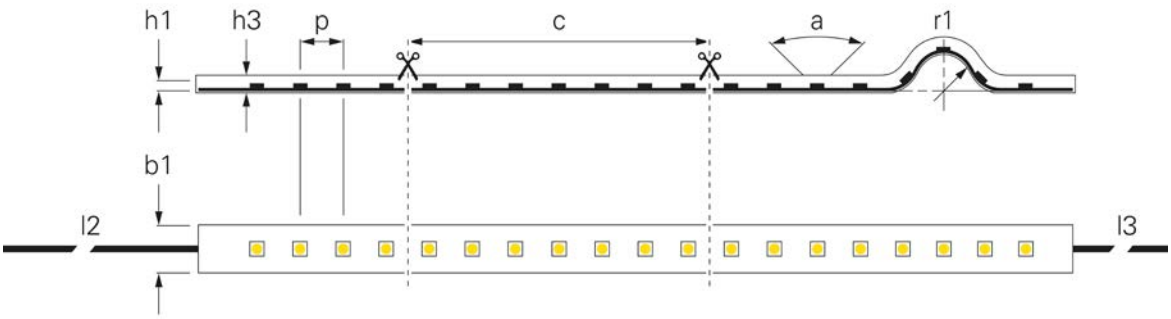

· high-performance adhesive tape 3M 200MP

(a) Light Beam Angle	120 Degree	CRI (Ra)	80
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Type of IP Protection	Silicone
Rated Input 1m	4 W	Channels	1
Rated Input Voltage	48 V/DC		

Article		Colour Temperature	(p) LED Distance	(c) Segment Length	(h1) Height	(h2) Height End Cap	(h3) Height Hose	Price
840317	WW	3000 K	8.33 mm	50 mm	12 mm	12 mm	12 mm	**€ 279.95**
840338	WW	3000 K	12.82 mm	166.66 mm	2.6 mm	2.8 mm	2.6 mm	**€ 899.95**
840319	NW	4000 K	12.82 mm	166.66 mm	2.6 mm	2.8 mm	2.6 mm	**€ 279.95**
840340	NW	4000 K	12.82 mm	166.66 mm	2.6 mm	2.8 mm	2.6 mm	**€ 899.95**

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

230V LED STRIPES

This LED stripe is ideally suited if the requirements and focus are on flexible, water-protected and long-lasting lighting routes in indoor and outdoor areas.
Due to the voltage of 230V, no additional power supply unit is required. The delivery is ready for connection with mounted Schuko plug and moulded endcap.
Applications of large distances, such as on buildings or hotel corridors can be operated in one piece up to 50m.

SMD 230V-14W LONG RUN IP65

IP65

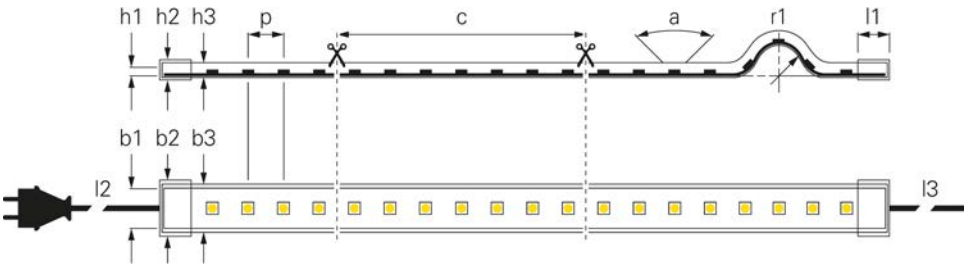

- **230 V direct connection**
- **Ready to connect using IP44 shaped plug and end cap**
- **Total length to be operated up to 50 m**
- **Including mounting material**

(p) LED Distance	11.9 mm	(l1) Length End Cap	27 mm
(c) Segment Length	166.7 mm	(l2) Primary Cable Length	3 m
(a) Light Beam Angle	120 Degree	Rated Input 1m	14 W
(r1) Bending Radius min.	150 mm	Rated Input Voltage	220-240 V/AC
(h1) Height	13.2 mm	CRI (Ra)	80
(h2) Height End Cap	18 mm	Type of IP Protection	PVC cover
(h3) Height Hose	13.2 mm	IP Protection Type Plug	IP 44
(b1) Width	17 mm	Working Temperature	-10 to 60 °C
(b2) Width end cap	21.8 mm	Channels	1
(b3) Width Hose	17 mm		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	EEI	Price
840390	WW	2700 K	103 lm/W	1442 lm	15000 mm	F	**€ 615.95**
840391	WW	2700 K	103 lm/W	1442 lm	50000 mm	F	**€ 1999.95**
840386	WW	3000 K	105 lm/W	1470 lm	15000 mm	E	**€ 615.95**
840387	WW	3000 K	105 lm/W	1470 lm	50000 mm	E	**€ 1999.95**
840388	NW	4000 K	114 lm/W	1596 lm	15000 mm	E	**€ 615.95**
840389	NW	4000 K	114 lm/W	1596 lm	50000 mm	E	**€ 1999.95**

1 CH IP65

Accessories

930689	End cap set of 2 pieces for 230 V LED stripe		**€ 3.95**
930690	Supply cable with shaped plug for 230 V LED stripe		**€ 27.95**
930691	Flex connector for 230 V LED stripe		**€ 19.95**
930692	Mounting clamp set of 10 pieces for 230 V LED stripe		**€ 7.95**
930693	Plastic profile 1 m for 230 V LED stripe		**€ 11.95**
930809	Plastic profile 2 m for 230 V LED stripe		**€ 19.95**

ASSEMBLY KIT FOR IP65/IP67 LED STRIPS

- Set comprises:
- **15 silicone retaining clips**
- **30 stainless steel screws**
- **Five end caps**
- **Supplied without silicone/adhesive**

Housing Silicone

Article	for Stripes with outer dimensions	Price
840293	11-12 mm	**€ 3.95**
840294	13-15 mm	**€ 3.95**
840295	17-19 mm	**€ 3.95**
840392	8-10 mm	**€ 3.95**

3M™ DOUBLE-SIDED ADHESIVE TAPE



- **For installing aluminium profiles/LED strips on smooth surfaces**
- **Not suitable for IP65/67 silicone strips**

Length 50 m Height 0.2 mm

Article	Width	Price
930345	8 mm	**€ 21.95**
930346	10 mm	**€ 23.95**
930347	12 mm	**€ 25.95**
930348	15 mm	**€ 30.95**
930349	20 mm	**€ 38.95**
930350	25 mm	**€ 45.95**

3M™ DOUBLE-SIDED ADHESIVE TAPE FOR SILICONE SURFACES



- **Special adhesive tape for LED strips with silicone tube/full potting**
- **High solvent resistance**
- **Excellent temperature resistance**
- **Strong initial bond**
- **High adhesive strength on most silicone surfaces and on substrates that are difficult to bond**

Length 55 m Height 0.127 mm
Width 12 mm

Article	Width	Price
930406	12 mm	**€ 199.95**

DALI&0/1-10V Constant Voltage Dimming Driver
LCPT5AD-1H24V
SELV
Dimming Card Driver
DIMMINTY PANEL

POWER SUPPLIES

790 Overview power supplies
792 DC - CV
808 DC - CC
818 AC - CV

power supplies

page 798

page 798

page 799

page 799

page 800

page 800

page 801

page 801

page 802

page 802

page 803

page 804

page 805

page 805

page 807

page 807

page 811

page 811

page 812

page 812

page 813

page 813

page 814

page 814

page 815

page 817

page 819

page 819

PLANNING ELECTRICAL INSTALLATIONS EVEN BETTER

You will certainly notice the new technical data when browsing through our power supplies and ask yourself what it is all about? In future, we would like to support you even better in the planning and dimensioning of your installations. The background to this is that more and more power supplies for lighting are already being installed in standard buildings [directly in the luminaires or as an external power supply].

Due to the inrush currents inherent in the design, e.g. after a power failure and the subsequent simultaneous start of all power supplies, an overload of the circuit breakers may occur. In order to be able to take this into account during the planning stage, we provide you with the necessary data for all our power supplies.

WIRE CROSS SECTION

When installing voltage-stable [CV] or current-stable [CC] power supply units and associated components, always ensure that the cable cross-sections are sufficiently dimensioned, especially with regard to the dependence of the cablelength.

The specified cable cross-sections [mm²] were adapted to the commercially available cross-sections. The maximum cable length of 10 m should not be exceeded. »Red values« must be avoided urgently.

12 V	2 m	5 m	10 m	12 m
25 W	0,25	0,75	1,50	[2,50]
50 W	0,75	1,50	4,00	[4,00]
75 W	1,00	2,50	4,00	[6,00]
100 W	1,50	4,00	6,00	[10,00]
125 W	1,50	4,00	10,00	[10,00]
150 W	2,50	6,00	10,00	-
200 W	2,50	6,00	-	-
300 W	4,00	10,00	-	-
400 W	6,00	-	-	-

24 V	2 m	5 m	10 m	12 m
25 W	0,25	0,25	0,50	[0,50]
50 W	0,25	0,50	0,75	[1,00]
75 W	0,25	0,75	1,00	[1,50]
100 W	0,50	0,75	1,50	[2,50]
125 W	0,50	1,00	2,50	[2,50]
150 W	0,50	1,50	2,50	[4,00]
200 W	0,75	1,50	4,00	[4,00]
300 W	1,00	2,50	6,00	-
400 W	1,50	4,00	6,00	-

48 V	2 m	5 m	10 m	12 m
25 W	0,25	0,25	0,25	[0,25]
50 W	0,25	0,25	0,25	[0,25]
75 W	0,25	0,25	0,50	[0,50]
100 W	0,25	0,25	0,50	[0,50]
125 W	0,25	0,25	0,50	[0,75]
150 W	0,25	0,50	0,75	[0,75]
200 W	0,25	0,50	1,00	[1,00]
300 W	0,25	0,75	1,50	[1,50]
400 W	0,50	1,00	2,50	[2,50]

HOW MANY POWER SUPPLY UNITS PER CIRCUIT BREAKER?

The maximum number of power supply units that may be connected to the respective circuit breaker is directly dependent on the inrush current. In our quick finders you will find the number for the most common types of circuit breaker [B10A, B16A, C10A, C16A].

CAPACITIVE LOAD OF POWER SUPPLIES

Due to their design, power supplies sometimes represent very different capacitive loads. Especially in combination with motion detectors, twilight switches or switching/dimming actuators, this value [as with the capacitor in nF/pF], which is available for many power supplies and specified in our quick finders, plays an important role with regard to the suitability and durability of all components. Please also refer to the manufacturer's data sheets.

electr. data		dimmable via					usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	20 W						x		flat	938uF	B10A=17, B16A=27, C10A=36, C16A=58	862232	869
12V	2,5-25 W	x					x		basic	31.16nF	B10=35, B16=56, C10=35, C16=56	862240	873
12V	40 W						x		basic	251.7nF	B10A=11, B16A=18, C10A=24, C16A=39	862162	870

DO YOU KNOW OUR LONG-FLAT POWER SUPPLIES?

The popular Long-Flat power supply series for installation in ceiling coves, shadow gaps or all other installation situations with limited space is now available in on/off and trailing edge dimmable versions in 12V, 24V and 48V in a wide range of versions from 45-240W.

All Long-Flat power supplies can be found on page 799.

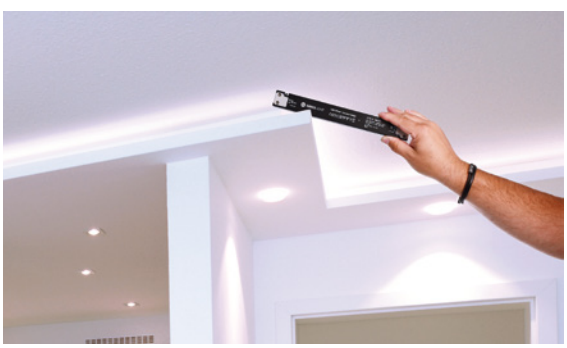

electr. data		dimmable via						usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	Casambi	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	4 W							x	x	mini		B10A=17, B16A=28, C10A=37, C16A=59	**872127**	798
12V	6 W							x		flat	38.83nF	B10A=17, B16A=28, C10A=37, C16A=59	**872629**	799
12V	12 W							x	x	octo	101uF	B10A=17, B16A=27, C10A=36, C16A=58	**862229**	798
12V	12 W							x		flat		B10A=17, B16A=27, C10A=36, C16A=58	**862231**	799
12V	20 W							x		flat	938uF	B10A=17, B16A=27, C10A=36, C16A=58	**862232**	799
12V	9,6-25W	x						x		basic	31.16nF	B10=35, B16=56, C10=35, C16=56	**862240**	803
12V	40 W							x		basic	251.7nF	B10A=11, B16A=18, C10A=24, C16A=39	**862162**	800
12V	40 W							x	x	IP	621.5nF	B10A=5, B16A=9, C10A=12, C16A=19	**872082**	800
12V	40 W		x	x	x			x		basic		B10A=18, B16A=28, C10A=36, C16A=56	**862253**	805
12V	45 W							x		long-flat	462.1nF	B10A=5, B16A=9, C10A=12, C16A=19	**862123**	799
12V	50 W							x		flat	485.5nF	B10A=11, B16A=18, C10A=24, C16A=39	**862121**	799
12V	12-50 W	x						x		basic	1924uF	B10A=17, B16A=28, C10A=17, C16A=28	**862220**	803
12V	60 W							x		long-flat	462.1nF	B10A=5, B16A=9, C10A=12, C16A=19	**862093**	799
12V	60 W					x		x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	**872109**	807
12V	75 W							x		basic	870nF	B10A=11, B16A=18, C10A=24, C16A=39	**862127**	800
12V	75 W							x	x	IP	621.5nF	B10A=5, B16A=8, C10A=10, C16A=16	**872084**	800
12V	75 W		x	x	x			x		basic		B10A=10, B16A=16, C10A=20, C16A=32	**862254**	805
12V	100 W							x		basic	842.2nF	B10A=3, B16A=5, C10A=7, C16A=11	**862165**	800
12V	100 W							x	x	IP	621.5nF	B10A=3, B16A=5, C10A=7, C16A=11	**872093**	800
12V	100 W							x		long-flat	462.1nF	B10A=3, B16A=5, C10A=7, C16A=11	**862125**	799
12V	33-100 W	x						x	x	IP	93,14nF	B10=7, B16=15, C10=7, C16=15	**872135**	804
12V	34-100 W	x						x		basic	146,34nF	B10=7, B16=15, C10=7, C16=15	**862241**	803
12V	120 W					x		x		IP		B10A=2, B16A=4, C10A=4, C16A=6	**872110**	807
12V	150 W							x		long-flat	462.1nF	B10A=3, B16A=5, C10A=6, C16A=10	**862172**	799
12V	150 W							x		basic	591.2nF	B10A=2, B16A=4, C10A=6, C16A=9	**862167**	799
12V	150 W							x	x	IP	621.5nF	B10A=2, B16A=4, C10A=6, C16A=9	**872086**	800

electr. data		dimmable via						usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	Casambi	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	66-200 W	x						x	x	IP	148,64nF	B10=3, B16=7, C10=3, C16=7	**872137**	804
12V	200 W							x	x	IP	621.5nF	B10A=2, B16A=3, C10A=4, C16A=7	**872088**	800
12V	200 W					x		x		IP		B10A=2, B16A=4, C10A=4, C16A=6	**872111**	807
24V	4 W							x	x	mini		B10A=59, B16A=94, C10A=123, C16A=197	**872128**	798
24V	6 W							x		flat	43.5nF	B10A=17, B16A=28, C10A=37, C16A=59	**872630**	799
24V	12 W							x	x	octo	620uF	B10A=17, B16A=27, C10A=36, C16A=58	**862230**	798
24V	12 W							x		flat	311uF	B10A=17, B16A=27, C10A=36, C16A=58	**862233**	799
24V	20 W							x		flat	446uF	B10A=17, B16A=27, C10A=36, C16A=58	**862234**	799
24V	9,6-25W	x						x		basic	9520uF	B10=35, B16=56, C10=35, C16=56	**862221**	803
24V	30W	x						x		long-flat		B16A=25, C16A=40	**862277**	803
24V	12-30W			x	x			x		long-flat		B10A=27, B16A=44, C10A=44, C16A=70	**872146**	807
24V	40 W							x		basic	762nF	B10A=11, B16A=18, C10A=24, C16A=39	**862163**	800
24V	40 W							x	x	IP	626.3nF	B10A=5, B16A=9, C10A=12, C16A=19	**872083**	800
24V	40 W		x	x	x			x		basic		B10A=18, B16A=28, C10A=36, C16A=56	**862255**	805
24V	45 W							x		long-flat	451.2nF	B10A=5, B16A=9, C10A=12, C16A=19	**862124**	799
24V	12-50 W	x						x		basic	10520uF	B10A=17, B16A=28, C10A=17, C16A=28	**862222**	803
24V	50 W							x		flat	604.5nF	B10A=11, B16A=18, C10A=24, C16A=39	**862122**	799
24V	60 W							x		long-flat	451.2nF	B10A=5, B16A=9, C10A=12, C16A=19	**862094**	799
24V	60 W					x		x		IP		B10A=6, B16A=9, C10A=10, C16A=16	**872112**	807
24V	12-60 W	x						x	x	*			**872045**	802
24V	60W	x						x		long-flat		B16A= 25, B16A=40	**862278**	803
24V	26-60W			x	x			x		long-flat		B10A=23, B16A=37, C10A=37, C16A=59	**872147**	807
24V	75 W							x		basic	760nF	B10A=11, B16A=18, C10A=24, C16A=39	**862164**	800
24V	75 W							x	x	IP	626.3nF	B10A=5, B16A=8, C10A=10, C16A=16	**872085**	800
24V	75 W		x	x	x			x		basic		B10A=10, B16A=16, C10A=20, C16A=32	**862256**	805
24V	25-75W	x						x		long-flat		B10A=2, B16A=4 C10A=5, C16A=9	**862282**	802

electr. data		dimmable via						usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	Casambi	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
24V	90 W							x	x	IP		B10A=2, B16A=3, C10A=3, C16A=6	**872103**	
24V	100 W							x		basic	724.2nF	B10A=3, B16A=5, C10A=7, C16A=11	**862166**	800
24V	33-100 W	x						x		IP	94,13nF	B10=7, B16=15, C10=7, C16=15	**872136**	804
24V	34-100 W	x						x		basic	140.74nF	B10=7, B16=15, C10=7, C16=15	**862242**	803
24V	100 W							x		long-flat	451.2nF	B10A=3, B16A=5, C10A=7, C16A=11	**862126**	799
24V	100 W							x	x	IP	626.3nF	B10A=3, B16A=5, C10A=7, C16A=11	**872094**	800
24V	120 W					x		x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	**872113**	807
24V	150 W							x		basic	591.2nF	B10A=2, B16A=4, C10A=6, C16A=9	**862168**	800
24V	150 W							x		long-flat	451.2nF	B10A=3, B16A=5, C10A=6, C16A=10	**862173**	799
24V	150 W							x	x	IP	626.3nF	B10A=2, B16A=4, C10A=6, C16A=9	**872087**	800
24V	150 W						1K	x		basic		B10A=5, B16A= 9 C10A= 9, C16A=15	**862299**	807
24V	150 W						2K	x		basic		B10A=5, B16A= 9 C10A= 9, C16A=15	**862300**	807
24V	150 W						3/4K	x		basic		B10A=5, B16A= 9 C10A= 9, C16A=15	**862301**	807
24V	30-150 W	x						x	x	*			**872046**	802
24V	50-150 W	x						x		long-flat		B10A=2, B16A=3, C10A=4, C16A=7	**862268**	802
24V	150 W		x	x	x			x		basic		B10A=5, B16A=9, C10A=10 C16A=18	**862262**	805
24V	45-150W			x	x			x		long-flat		B10A=11, B16A=17 C10A=17, C16A=27	**872148**	807
24V	200 W					x		x		IP		B10A=2, B16A=4, C10A=4, C16A=6	**872114**	807
24V	66-200 W	x						x	x	IP	148.64nF	B10=3, B16=7, C10=3, C16=7	**872138**	804
24V	240 W							x	x	IP	626.3nF	B10A=2, B16A=3, C10A=4, C16A=7	**872089**	800
24V	240 W							x		long-flat	5600uF	B10A=1, B16A=2, C10A=3, C16A=5	**862265**	799
24V	80-240W	x						x		long-flat		B10A=2, B16A=3 C10A=4, C16A=6	**862280**	802
24V	240 W		x	x	x			x		basic		B10A=3, B16A=5, C10A=6, C16A=10	**862263**	805
24V	320 W							x	x	IP	626.3nF	B10A=2, B16A=2, C10A=4, C16A=6	**872091**	800
48V	40 W							x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	**872105**	801
48V	60 W							x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	**872106**	801

electr. data		dimmable via						usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	Casambi	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
48V	25-75W	x						x		long-flat		B10A=2, B16A=4 C10A=5, C16A=9	**862283**	802
48V	75 W		x	x	x			x		basic		B10A=10, B16A=16, C10A=20, C16A=32	**862273**	805
48V	90 W							x	x	IP		B10A=2, B16A=3, C10A=3, C16A=6	**872107**	801
48V	33-100 W	x						x		IP	6,6uF	B10=3 B16=5, C10=7, C16=11	**872142**	804
48V	34-100 W	x						x		basic	140,74nF	B10=7 B16=15, C10=7, C16=15	**862274**	803
48V	100 W							x		long-flat	451.2nF	B10A=3, B16A=5, C10A=7, C16A=11	**862270**	799
48V	120 W							x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	**872108**	801
48V	150 W		x	x	x			x		basic		B10A=5, B16A=9, C10A=10 C16A=18	**862275**	805
48V	50-150 W	x						x		long-flat		B10A=2, B16A=3, C10A=4, C16A=7	**862269**	802
48V	150 W							x		long-flat	451.2nF	B10A=3, B16A=5, C10A=6, C16A=10	**862271**	799
48V	80-240W	x						x		long-flat		B10A=2, B16A=3 C10A=4, C16A=6	**862281**	802
48V	320 W							x	x	IP	626.3nF	B10A=2, B16A=3, C10A=4, C16A=6	**872145**	800
48V	66-200 W	x						x	x	IP	6,6uF	B10=2, B16=3, C10=4 C16=7	**872143**	804
48V	200 W					x		x		IP		B10A=2, B16A=4, C10A=4, C16A=6	**872115**	807
48V	240 W		x	x	x			x		basic		B10A=3, B16A=5, C10A=6, C16A=10	**862276**	805
48V	240 W							x		long-flat	5600uF	B10A=1, B16A=2, C10A=3, C16A=5	**862272**	799
48V	600 W							x	x	IP		B10A=1, B16A=1, C10A=1, C16A=2	**872125**	801
48V	600 W		x					x	x	IP		B10A=1, B16A=1, C10A=1, C16A=2	**872126**	805

power supplies design

mini round / octo flat basic long-flat IP * special design

IP65

DEKO-LIGHT POWER SUPPLY UNITS CV | MINI DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**

Housing	Plastic	Width	27 mm
Power	4 W	Height	21 mm
Length	53 mm	Rated Input Voltage	220-240 V/AC

Article		Output Voltage	Output Current	Price
872127	■	12 V/DC	0-330 mA	**€ 9.95**
872128	■	24 V/DC	0-170 mA	**€ 9.95**

CV | 110 | SELV | 1 CH | IP65

IP65

DEKO-LIGHT POWER SUPPLY UNITS CV IP | OCTO DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**

Housing	Plastic	Width	48 mm
Power	12 W	Height	24 mm
Length	50 mm	Rated Input Voltage	220-240 V/AC

Article		Output Voltage	Output Current	Price
862229	■	12 V/DC	0-1000 mA	**€ 17.95**
862230	■	24 V/DC	0-500 mA	**€ 17.95**

CV | 110 | SELV | 1 CH | IP65

DEKO-LIGHT POWER SUPPLY UNITS CV | FLAT DESIGN

- **Ideal for concealed mounting in ceiling coves**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing Plastic Rated Input Voltage 220-240 V/AC

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
872629	■	12 V/DC	6.0 W	0-500 mA	98 mm	46 mm	11 mm	**€ 13.95**
862231	■	12 V/DC	12.0 W	0-1000 mA	128 mm	50 mm	13 mm	**€ 17.95**
862232	■	12 V/DC	20.0 W	0-1670 mA	128 mm	50 mm	13 mm	**€ 20.95**
862121	■	12 V/DC	50.0 W	0-4160 mA	185 mm	62 mm	22 mm	**€ 41.95**
872630	■	24 V/DC	6.0 W	0-250 mA	98 mm	46 mm	11 mm	**€ 13.95**
862233	■	24 V/DC	12.0 W	0-500 mA	128 mm	50 mm	13 mm	**€ 17.95**
862234	■	24 V/DC	20.0 W	0-830 mA	128 mm	50 mm	13 mm	**€ 20.95**
862122	■	24 V/DC	50.0 W	0-2100 mA	185 mm	62 mm	22 mm	**€ 41.95**

CV | 110 | M M | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CV | LONG-FLAT DESIGN

- **Ideal for concealed mounting in ceiling coves**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing Plastic Rated Input Voltage 220-240 V/AC

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
862123	■	12 V/DC	45.0 W	0-3750 mA	251 mm	30 mm	16 mm	**€ 39.95**
862093	□	12 V/DC	60.0 W	0-5000 mA	305 mm	30 mm	17 mm	**€ 47.95**
862125	■	12 V/DC	100.0 W	0-8340 mA	312 mm	30 mm	18.2 mm	**€ 77.95**
862172	■	12 V/DC	132.0 W	0-11000 mA	335 mm	30 mm	21.6 mm	**€ 103.95**
862124	■	24 V/DC	45.0 W	0-1870 mA	251 mm	30 mm	16 mm	**€ 39.95**
862094	□	24 V/DC	60.0 W	0-2500 mA	305 mm	30 mm	18.2 mm	**€ 47.95**
862126	■	24 V/DC	100.0 W	0-4170 mA	312 mm	30 mm	18.2 mm	**€ 77.95**
862173	■	24 V/DC	150.0 W	0-6250 mA	335 mm	30 mm	21.6 mm	**€ 103.95**
862265	■	24 V/DC	240.0 W	0-10000 mA	357 mm	32 mm	23 mm	**€ 127.95**
862270	■	48 V/DC	100.0 W	0-2080 mA	312 mm	30 mm	18.2 mm	**€ 77.95**
862271	■	48 V/DC	150.0 W	0-3125 mA	335 mm	30 mm	21.6 mm	**€ 103.95**
862272	■	48 V/DC	240.0 W	0-5000 mA	357 mm	32 mm	22.5 mm	**€ 127.95**

CV | 110 | M M | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CV | BASIC DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing Plastic Rated Input Voltage 220-240 V/AC

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
862162	■	12 V/DC	40.0 W	0-3300 mA	166 mm	52 mm	24 mm	**€ 37.95**
862127	■	12 V/DC	75.0 W	0-6300 mA	184 mm	61 mm	32 mm	**€ 59.95**
862165	■	12 V/DC	100.0 W	0-8300 mA	184 mm	61 mm	32 mm	**€ 77.95**
862167	■	12 V/DC	150.0 W	0-12500 mA	210 mm	67 mm	34 mm	**€ 103.95**
862163	■	24 V/DC	40.0 W	0-1700 mA	166 mm	52 mm	24 mm	**€ 37.95**
862164	■	24 V/DC	75.0 W	0-3100 mA	184 mm	61 mm	32 mm	**€ 59.95**
862166	■	24 V/DC	100.0 W	0-4200 mA	184 mm	61 mm	32 mm	**€ 77.95**
862168	■	24 V/DC	150.0 W	0-6250 mA	210 mm	67 mm	34 mm	**€ 103.95**

CV | 110 | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CV IP | IP DESIGN

IP67

- **Robust housing**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing Aluminium Rated Input Voltage 100-240 V/AC

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
872082	■	12 V/DC	40.0 W	0-3340 mA	176 mm	58 mm	30.5 mm	**€ 59.95**
872084	■	12 V/DC	75.0 W	0-6250 mA	186 mm	64 mm	39 mm	**€ 75.95**
872093	■	12 V/DC	100.0 W	0-8340 mA	186 mm	64 mm	39 mm	**€ 91.95**
872086	■	12 V/DC	150.0 W	0-12500 mA	191 mm	70 mm	40 mm	**€ 119.95**
872088	■	12 V/DC	200.0 W	0-16670 mA	249 mm	72 mm	41 mm	**€ 143.95**
872083	■	24 V/DC	40.0 W	0-1670 mA	176 mm	58 mm	30.5 mm	**€ 59.95**
872085	■	24 V/DC	75.0 W	0-3125 mA	186 mm	64 mm	39 mm	**€ 75.95**
872094	■	24 V/DC	100.0 W	0-4170 mA	186 mm	64 mm	39 mm	**€ 91.95**
872087	■	24 V/DC	150.0 W	0-6250 mA	191 mm	70 mm	40 mm	**€ 119.95**
872089	■	24 V/DC	240.0 W	0-10000 mA	249 mm	72 mm	40 mm	**€ 147.95**
872091	■	24 V/DC	320.0 W	0-13340 mA	252 mm	90 mm	44 mm	**€ 175.95**
872145	■	48 V/DC	320.0 W	0-6660 mA	252 mm	90 mm	44 mm	**€ 175.95**

CV | 110 | SELV | 1 CH | IP67

IP67

MEANWELL POWER SUPPLY UNITS CV IP | NPF SERIES

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**
- **Robust housing**

Housing	Plastic	Rated Input Voltage	90-305 V/AC
Output Voltage	48 V/DC		

Article		Power	Output Current	Length	Width	Height	Price
872105	■	40.0 W	0-840 mA	150 mm	53 mm	35 mm	**€ 67.95**
872106	■	60.0 W	0-1250 mA	150 mm	53 mm	35 mm	**€ 75.95**
872107	■	90.0 W	0-1880 mA	171 mm	63 mm	37.5 mm	**€ 95.95**
872108	■	120.0 W	0-2500 mA	191 mm	63 mm	37.5 mm	**€ 111.95**

CV | 110 | M M | SELV | 1 CH | IP67

IP67

MEANWELL POWER SUPPLY UNIT CV IP | ELG/HLG SERIES

- **Output voltage/current can be adjusted via potentiometer**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Length	280 mm
Output Voltage	48 V/DC	Width	144 mm
Power	600 W	Height	48.5 mm
Output Current	0-12500 mA	Rated Input Voltage	90-305 V/AC

Article		Price
872125	■	**€ 391.95**

CV | 110 | M M | SELV | 1 CH | IP67

IP67

ABN LED SAFETY TRANSFORMER CV DIM IP

- **Safety transformer [DC] in accordance with DIN 2006-7 EN 61558-2-6: 2010-04**
- **Reinforced double insulation [separate primary and secondary winding]**
- **Additional insulating plastic parts**
- **More stringent test conditions**
- **Suitable for applications in areas of increased personal protection in accordance with DIN EN 61558 for operating lights in swimming pools, fountains, wet rooms or similar.**
- **Primary dimming possible using leading-edge phase dimmers**
- **Maximum load: 80 % output in continuous operation**

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Output Voltage	24 V/DC	Channels	1

Article		Power	Length	Width	Height	Price
872045	■	12.0-60.0 W	150 mm	90 mm	70 mm	**€ 295.95**
872046	■	30.0-150.0 W	176 mm	116 mm	110 mm	**€ 495.95**

CV | 110 | 1 CH | IP67

DEKO-LIGHT NETZGERÄTE CV DIM / BAUFORM LONG-FLAT

- **dimmable with leading/trailing edge phase dimmers**
- **ideal for retrofitting existing installations, as primarily dimmable with rotary/ push-button dimmers [C-compatible]**
- **long, compact design**
- **not combinable with PWM dimmers such as RF, DMX, DALI, KNX**
- **flicker-free**
- **short-circuit and overload-proof**
- **overheating protection**

Housing	Plastic	Channels	1
Width	32 mm		

Article		Output Voltage	Power	Length	Height	Rated Input Voltage	Price
862282	■	24 V/DC	25.0-75.0 W	400 mm	21.6 mm	198-264 V/AC	**€ 79.95**
862268	■	24 V/DC	50.0-150.0 W	400 mm	21.6 mm	220-240 V/AC	**€ 103.95**
862280	■	24 V/DC	80.0-240.0 W	443 mm	23 mm	220-240 V/AC	**€ 127.95**
862283	■	48 V/DC	25.0-75.0 W	400 mm	21.6 mm	198-264 V/AC	**€ 79.95**
862269	■	48 V/DC	50.0-150.0 W	400 mm	21.6 mm	220-240 V/AC	**€ 103.95**
862281	■	48 V/DC	80.0-240.0 W	443 mm	23 mm	220-240 V/AC	**€ 127.95**

CV | M M | SELV | 1 CH | IP20

KGP/NEXIVO POWER SUPPLY UNITS CV DIM / LONG-FLAT DESIGN

- **Can be dimmed using trailing-edge phase dimmers**
- **Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers [C-compatible]**
- **Long, extremely compact design**
- **Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Polycarbonate	Height	18.5 mm
Output Voltage	24 V/DC	Rated Input Voltage	220-240 V/AC
Width	30 mm	Channels	1

Article		Power	Length	Price
862278	□	0.0-60.0 W	300 mm	**€ 143.95**
862277	□	0.0-30.0 W	260 mm	**€ 91.95**

CV | M M | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CV DIM | BASIC DESIGN

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers (C-compatible)**
- **Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Channels	1
Rated Input Voltage	220-240 V/AC		

Article		Output Voltage	Power	Length	Width	Height	Price
862240	■	12 V/DC	9.6-25.0 W	128 mm	52 mm	30 mm	**€ 43.95**
862220	■	12 V/DC	12.0-50.0 W	184 mm	61 mm	32 mm	**€ 59.95**
862241	■	12 V/DC	34.0-100.0 W	210 mm	67 mm	34 mm	**€ 115.95**
862221	■	24 V/DC	9.6-25.0 W	128 mm	52 mm	30 mm	**€ 43.95**
862222	■	24 V/DC	12.0-50.0 W	184 mm	61 mm	32 mm	**€ 59.95**
862242	■	24 V/DC	34.0-100.0 W	210 mm	67 mm	34 mm	**€ 115.95**
862274	■	48 V/DC	34.0-100.0 W	210 mm	67 mm	34 mm	**€ 115.95**

CV | 110 | M M | SELV | 1 CH | IP20

IP67

DEKO-LIGHT POWER SUPPLY UNITS CV DIM IP | IP DESIGN

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers [C-compatible]**
- **Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX**
- **Robust housing**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	40 mm	Channels	1

Article		Output Voltage	Power	Length	Width	Price
872135	■	12 V/DC	33.0-100.0 W	191 mm	70 mm	**€ 135.95**
872137	□	12 V/DC	66.0-200.0 W	249 mm	72 mm	**€ 165.95**
872136	■	24 V/DC	33.0-100.0 W	191 mm	70 mm	**€ 135.95**
872138	□	24 V/DC	66.0-200.0 W	249 mm	72 mm	**€ 165.95**
872142	□	48 V/DC	33.0-100.0 W	191 mm	70 mm	**€ 135.95**
872143	□	48 V/DC	66.0-200.0 W	249 mm	72 mm	**€ 165.95**

CV | 110 | SELV | 1 CH | IP67

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

DALI

DEKO-LIGHT POWER SUPPLY UNITS CV DIM | LCP DALI

- **Can be dimmed using DALI2/DALI1**
- **Can be dimmed using 0-10 V/1-10 V**
- **Can be dimmed using touch dimmer via 230 V push-button (iPush)**
- **New Intelli-Push function [shortcut synchronises all connected power supply units when needed]**
- **Power supply unit and PWM dimmer in one device**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Channels	1
Rated Input Voltage	220-240 V/AC		

Article		Output Voltage	Power	Length	Width	Height	Price
862253	☐	12 V/DC	40.0 W	185 mm	42.5 mm	28.5 mm	**€ 79.95**
862254	☐	12 V/DC	75.0 W	295 mm	40 mm	32 mm	**€ 103.95**
862255	☐	24 V/DC	40.0 W	185 mm	42.5 mm	28.5 mm	**€ 79.95**
862256	☐	24 V/DC	75.0 W	295 mm	40 mm	32 mm	**€ 103.95**
862262	☐	24 V/DC	150.0 W	295 mm	40 mm	32 mm	**€ 135.95**
862263	☐	24 V/DC	240.0 W	360 mm	40 mm	32 mm	**€ 175.95**
862273	☐	48 V/DC	75.0 W	295 mm	40 mm	32 mm	**€ 103.95**
862275	☐	48 V/DC	150.0 W	295 mm	40 mm	32 mm	**€ 135.95**
862276	☐	48 V/DC	240.0 W	360 mm	40 mm	32 mm	**€ 175.95**

CV | 110 | M M | SELV | 1 CH | IP20

IP67

MEANWELL POWER SUPPLY UNIT CV DIM IP | ELG/HLG SERIES

- **Can be dimmed using 0-10 V/1-10 V**
- **Flicker-free, secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Width	144 mm
Output Voltage	48 V/DC	Height	48.5 mm
Power	600 W	Rated Input Voltage	90-305 V/AC
Length	280 mm	Channels	1

Article		Price
872126	☐	**€ 399.95**

CV | 110 | M M | SELV | 1 CH | IP67

DALI

KGP/NEXIVO POWER SUPPLY UNITS CV DALI / LONG-FLAT DESIGN

- **Can be dimmed using DALI1/DALI2**
- **Power supply unit and DALI PWM dimmer in one device**
- **Extremely compact design**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Rated Input Voltage	100-305 V/AC
Output Voltage	24 V/DC	Channels	1
Width	30 mm		

Article		Power	Length	Height	Price
872146	☐	12.0-30.0 W	300 mm	16 mm	**€ 51.95**
872147	☐	26.0-60.0 W	350 mm	18 mm	**€ 63.95**
872148	☐	45.0-150.0 W	350 mm	18 mm	**€ 103.95**

CV | 110 | SELV | 1 CH | IP20

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

DEKO-LIGHT POWER SUPPLY UNITS CV DIM | LCP CASAMBI

- **Dimmable/can be controlled with Casambi via Bluetooth 4.0/5.1 Low Energy (BLE)**
- **Power supply unit and Casambi dimmer in one device**
- **Compact design**
- **Flicker-free (20 kHz)**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Functions	Bluetooth data transfer, Short-circuit proof, Protective extra-low voltage, Overloading protection, Lamp control gear 110, Furniture installation, Overtemperature protection
Output Voltage	24 V/DC		
Power	150 W		
Length	295 mm		
Width	40 mm		
Height	32 mm		
Rated Input Voltage	220-240 V/AC		

Article		Channels	Price
862299	☐	1	**€ 159.95**
862300	☐	2	**€ 167.95**
862301	☐	3 / 4	**€ 167.95**

CV | 110 | M M | SELV | IP20

MEANWELL POWER SUPPLY UNITS CV DIM | PWM KNX

- **Can be dimmed using KNX bus**
- **Flicker-free, secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Channels	1
Rated Input Voltage	90-305 V/AC		

Article		Output Voltage	Power	Length	Width	Height	Price
872109	■	12 V/DC	60.0 W	150 mm	53 mm	35 mm	**€ 127.95**
872110	■	12 V/DC	120.0 W	191 mm	63 mm	37.5 mm	**€ 167.95**
872111	■	12 V/DC	200.0 W	195 mm	68 mm	39.5 mm	**€ 195.95**
872112	■	24 V/DC	60.0 W	150 mm	53 mm	35 mm	**€ 127.95**
872113	■	24 V/DC	120.0 W	191 mm	63 mm	37.5 mm	**€ 167.95**
872114	■	24 V/DC	200.0 W	195 mm	68 mm	39.5 mm	**€ 195.95**
872115	■	48 V/DC	200.0 W	195 mm	68 mm	39.5 mm	**€ 195.95**

CV | 110 | M M | SELV | 1 CH | IP20

electr. data			dimmable via				usage / design			electrical limit values		power supply	
current strength	power	voltage	leading cut-off	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
260 mA	6,0-12,0W	23-46V	x				x		basic		B10A= 17, B16A=28 C10A=37, C16A=59	**862285**	814
350 mA	0,9-3,9 W	2,5-11V					x	x	mini		B10A=70, B16A=112, C10A=140, C16A=224	**872129**	811
350 mA	2,1-4,0 W	6-12V	x				x	x	mini	10.00nF	B10A=35, B16A=56, C10A=74, C16A=118	**872132**	813
350 mA	0,7-6,0 W	2-18V					x		flat	40.44nF	B10A=17, B16A=28, C10A=37, C16A=59	**872628**	812
350 mA	3,9-9,0 W	11-26V	x				x		basic		B10A=17, B16A=28, C10A=37, C16A=59	**862202**	814
350 mA	6,0-10,0 W	17-29V					x		mini		B10A=57, B16A=92, C10A=57, C16A=92	**862239**	812
350 mA	6,3-12,0 W	18-35V	x				x		basic	20,65pF	B10A=17, B16A=28, C10A=37, C16A=59	**862203**	814
350 mA	0,7-12,0 W	2-35V					x		flat	194,0uF	B10A=11, B16A=18, C10A=24, C16A=39	**862223**	812
350 mA	6,3-12,0 W	18-37V	x				x	x	octo	190uF	B10A=35, B16A=56, C10A=74, C16A=118	**862235**	813
350 mA	9,1-15,0 W	26-43V	x				x		basic		B10A=38, B16A=61, C10A=38, C16A=61	**862266**	815
350 mA	0,7- 18,0 W	2-52V					x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	**180512**	812
350 mA	9,8- 20,0 W	28-57V	x				x		basic		B10A=11, B16A=18, C10A=24, C16A=39	**862204**	814
350 mA	0,7- 20,0 W	2-57V					x		flat	195uF	B10A=11, B16A=18, C10A=24, C16A=39	**862224**	812
450 mA	9,9-19,0 W	22-42V	x				x		quick		B10A=11, B16A=18, C10A=24, C16A=39	**862257**	814
500 mA	2,0-4,0 W	4-8V					x	x	mini	85,0pF	B10A=70, B16A=112, C10A=140, C16A=224	**872130**	811
500 mA	2,0-4,0 W	4-8V	x				x	x	mini	4.75nF	B10A=35, B16A=56, C10A=74, C16A=118	**872014**	814
500 mA	1,0-6,0 W	2-12V					x		flat	38.48nF	B10A=17, B16A=28, C10A=37, C16A=59	**862130**	812
500 mA	1,0- 12,0 W	2-24V					x		flat	298uF	B10A=11, B16A=18, C10A=24, C16A=39	**862225**	812
500 mA	6,5-10,0 W	13-20V					x		mini		B10A=57, B16A=92, C10A=57, C16A=92	**862238**	812
500 mA	6,0- 12,0 W	12-24V	x				x	x	octo	186uF	B10A=35, B16A=56, C10A=74, C16A=118	**862236**	814
500 mA	1,0- 18,0 W	2-38V					x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	**180513**	812
500 mA	1,0- 20,0 W	2-40V					x		flat	292uF	B10A=11, B16A=18, C10A=24, C16A=39	**862226**	812
500 mA	10,0-20,0 W	20-40V	x				x		basic		B10A=11, B16A=18, C10A=24, C16A=39	**862205**	814
500 mA	15,0-30,0 W	30-60V					x		basic	366nF	B10A=11, B16A=18, C10A=24, C16A=39	**862196**	812
500 mA	20,0-40,0 W	40-80V					x		basic	356nF	B10A=8, B16A=14, C10A=18, C16A=29	**862197**	812
500 mA	20,0-40,0 W	40-80V	x				x		basic	29.84nF	B10A=35, B16A=56, C10A=35, C16A=56	**862136**	814

electr. data			dimmable via				usage / design			electrical limit values		power supply	
current strength	power	voltage	leading cut-off	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
700 mA	1,7-4,0 W	2-6V					x	x	mini	82pF	B10A=70, B16A=112, C10A=140, C16A=224	**872131**	811
700 mA	2,0-4,0 W	2,5-6V	x				x	x	mini	10nF	B10A=35, B16A=56, C10A=74, C16A=118	**872134**	813
700 mA	1,4-6,0 W	2-9V					x		flat	40.44nF	B10A=17, B16A=28, C10A=37, C16A=59	**862048**	812
700 mA	1,4- 12,0 W	2-17V					x		flat	427uF	B10A=11, B16A=18, C10A=24, C16A=39	**862227**	812
700 mA	7,0- 12,0 W	10-17V	x				x	x	octo	188uF	B10A=35, B16A=56, C10A=74, C16A=118	**862237**	813
700 mA	1,4- 18,0 W	2-26V					x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	**180514**	812
700 mA	1,4- 20,0 W	2-29V					x		flat	295uF	B10A=11, B16A=18, C10A=24, C16A=39	**862228**	812
700 mA	9,8- 20,0 W	14-28V	x				x		basic		B10A=11, B16A=18, C10A=24, C16A=39	**862207**	814
700 mA	9,1-30,0 W	13-43V					x		basic		B10A=11, B16A=18, C10A=24, C16A=39	**862198**	812
700 mA	20,3-35,0 W	29-57V					x		basic	359,3nF	B10A=8, B16A=14, C10A=18, C16A=29	**862199**	812
700 mA	19,6-40,0 W	28-56V	x				x		basic		B10A=35, B16A=56, C10A=35, C16A=56	**862208**	814
900mA	19,8-40,0 W	22-44V					x		basic	13.5pF	B10A=8, B16A=14, C10A=18, C16A=29	**862157**	812
900mA	19,8-40,0 W	22-44V	x				x		basic	30nF	B10A=35, B16A=56, C10A=35, C16A=56	**862264**	814
1050 mA	20,0-40,0 W	19-38V					x		basic		B10A=8, B16A=14, C10A=18, C16A=29	**862201**	812
1050 mA	20,0-40,0 W	19-38V	x				x		basic		B10A=35, B16A=56, C10A=35, C16A=56	**862209**	814
1050 mA	23,5-45,0 W	22-43V	x				x		basic	33,46nF	B10A=35, B16A=56, C10A=35, C16A=56	**862210**	814
1050 mA	23,1-45,0 W	22-43V	x				x		quick	33,46nF	B10A=35, B16A=56, C10A=35, C16A=56	**862258**	814
1300 mA	26,0-50,0 W	20-39V	x				x		basic		B10A=35, B16A=56, C10A=35, C16A=56	**862211**	814
1500 mA	40,0-60,0 W	27-42V	x				x		quick		B10A=25, B16A=41, C10A=25, C16A=41	**862259**	814
MULTI*	3,2- 12,0 W	15-54V		x	x		x		basic		B10A=23, B16A=37, C10A=46, C16A=74	**862190**	817
MULTI*	5,0- 25,0 W	20-60V		x	x		x		basic		B10A=23, B16A=37, C10A=46, C16A=74	**862191**	817
MULTI*	8,75-45,0 W	21-70V		x	x		x		basic		B10A=12, B16A=20, C10A=25, C16A=40	**862192**	817
MULTI*	14,7-45,0 W	14-43V		x	x		x		basic		B10A=12, B16A=20, C10A=25, C16A=40	**862193**	817
MULTI*	26,3-75,5 W	25-71V		x	x		x		basic		B10A=3, B16A=5, C10A=6, C16A=10	**862194**	817

* Due to the large number of possible settings, please refer to the detailed technical data on the specified product page.

power supplies design

mini round / octo flat basic long-flat IP * special design

TIPS AND TRICKS FOR CURRENT-STABLE POWER SUPPLIES

In contrast to voltage-stable power supplies [CV], current-stable power supply units, often abbreviated to CC [constant current], the output current is stable. This important factors that must be taken into focus during planning and installation.

- Do not connect LEDs to CC power supply units below voltage, as this can damage them and cause them to fail after a short period of operation.
- if possible: 1 luminaire = 1 power supply
- if necessary: operate max. 2 luminaires in a series connection on one power supply unit.
  However, the voltage range and the power of the power supply must be checked carefully.

Netzgerätedaten prüfen! Check driver data!



Installationshinweis für Netzgerät stromstabil [CC]: LED nicht unter Spannung anschließen!
installation instruction for power supply constant current [CC]: Don't connect LED under voltage!

IP65

DEKO-LIGHT POWER SUPPLY UNITS CC | MINI DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Height	21 mm
Length	53 mm	Rated Input Voltage	220-240 V/AC
Width	27 mm		

Article		Output Current	Power	Output Voltage	Price
872129	■	350 mA	0.9-3.9 W	2.5-11 V/DC	**€ 9.95**
872130	■	500 mA	2.0-4.0 W	4-8 V/DC	**€ 9.95**
872131	■	700 mA	1.7-4.0 W	2.5-6 V/DC	**€ 9.95**

CC | 110 | M M | SELV | 1 CH | IP65

HEP POWER SUPPLY UNITS CC | G5S10W

- **Compact design**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Height	20 mm
Length	58.1 mm	Rated Input Voltage	220-240 V/AC
Width	39.1 mm		

Article		Output Current	Power	Output Voltage	Price
862239	□	350 mA	6.0-10.0 W	17-29 V/DC	**€ 21.95**
862238	□	500 mA	6.5-10.0 W	13-32 V/DC	**€ 21.95**

CC | 110 | M M | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CC | FLAT DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing Plastic Rated Input Voltage 220-240 V/AC

Article		Output Current	Power	Output Voltage	Length	Width	Height	Price
862224	■	350 mA	0.7-20.0 W	2-57 V/DC	128 mm	50 mm	13 mm	**€ 22.95**
862223	■	350 mA	0.7-12.0 W	2-35 V/DC	128 mm	50 mm	13 mm	**€ 19.95**
872628	■	350 mA	0.7-6.0 W	2-18 V/DC	98 mm	46 mm	11 mm	**€ 13.95**
862226	■	500 mA	1.0-20.0 W	2-40 V/DC	128 mm	50 mm	13 mm	**€ 22.95**
862225	■	500 mA	1.0-12.0 W	2-24 V/DC	128 mm	50 mm	13 mm	**€ 19.95**
862130	■	500 mA	1.0-6.0 W	2-12 V/DC	98 mm	46 mm	11 mm	**€ 13.95**
862228	■	700 mA	1.4-20.0 W	2-29 V/DC	128 mm	50 mm	13 mm	**€ 22.95**
862227	■	700 mA	1.4-12.0 W	2-17 V/DC	128 mm	50 mm	13 mm	**€ 19.95**
862048	■	700 mA	1.4-6.0 W	2-9 V/DC	98 mm	46 mm	11 mm	**€ 13.95**

CC | 110 | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CC | BASIC DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing Plastic Rated Input Voltage 220-240 V/AC

Article		Output Current	Power	Output Voltage	Length	Width	Height	Price
180512	■	350 mA	0.7-18.0 W	2-52 V/DC	115 mm	45 mm	21 mm	**€ 18.95**
180513	■	500 mA	1.0-18.0 W	2-38 V/DC	115 mm	45 mm	21 mm	**€ 18.95**
862196	■	500 mA	15.0-30.0 W	30-60 V/DC	127 mm	43 mm	28 mm	**€ 21.95**
862197	■	500 mA	20.0-40.0 W	40-80 V/DC	127 mm	43 mm	28 mm	**€ 23.95**
180514	■	700 mA	1.4-18.0 W	2-26 V/DC	115 mm	45 mm	21 mm	**€ 18.95**
862198	■	700 mA	14.0-30.0 W	21-43 V/DC	127 mm	43 mm	28 mm	**€ 21.95**
862199	■	700 mA	20.0-40.0 W	29-57 V/DC	127 mm	43 mm	28 mm	**€ 23.95**
862157	■	900 mA	19.0-40.0 W	22-44 V/DC	127 mm	43 mm	28 mm	**€ 23.95**
862201	■	1050 mA	20.0-40.0 W	19-38 V/DC	127 mm	43 mm	28 mm	**€ 23.95**

CC | 110 | SELV | 1 CH | IP20

IP65

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | MINI DESIGN

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Rated Input Voltage	220-240 V/AC

Article		Output Current	Power	Output Voltage	Length	Width	Height	Price
872132	■	350 mA	2.1-4.0 W	6-12 V/DC	48 mm	30 mm	20 mm	**€ 15.95**
872014	■	500 mA	2.0-4.0 W	4-8 V/DC	53 mm	27 mm	21 mm	**€ 15.95**
872134	■	700 mA	2.0-4.0 W	2.5-6 V/DC	48 mm	30 mm	20 mm	**€ 15.95**

CC | 110 | M M | SELV | 1 CH | IP65

IP65

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | OCTO DESIGN

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Height	24 mm
Length	50 mm	Rated Input Voltage	220-240 V/AC
Width	48 mm		

Article		Output Current	Power	Output Voltage	Price
862235	■	350 mA	6.3-12.0 W	18-37 V/DC	**€ 23.95**
862236	■	500 mA	6.0-12.0 W	12-24 V/DC	**€ 23.95**
862237	■	700 mA	7.0-12.0 W	10-17 V/DC	**€ 23.95**

CC | 110 | M M | SELV | 1 CH | IP65

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | BASIC DESIGN

- **Can be dimmed using trailing-edge phase dimmers**
- **Flicker-free**
- **Short circuit, overload and overheating protection**

Housing Plastic Rated Input Voltage 220-240 V/AC

Article		Output Current	Power	Output Voltage	Length	Width	Height	Price
862285	■	260 mA	6.0-12.0 W	23-46 V/DC	115 mm	39 mm	22 mm	**€ 25.95**
862202	■	350 mA	4.5-9.0 W	13-26 V/DC	115 mm	39 mm	22 mm	**€ 22.95**
862203	■	350 mA	6.3-12.0 W	18-35 V/DC	115 mm	39 mm	22 mm	**€ 29.95**
862204	■	350 mA	9.8-20.0 W	28-57 V/DC	127 mm	44 mm	28 mm	**€ 31.95**
862205	■	500 mA	10.0-20.0 W	20-40 V/DC	127 mm	44 mm	28 mm	**€ 31.95**
862136	■	500 mA	20.0-40.0 W	40-80 V/DC	166 mm	52 mm	24 mm	**€ 37.95**
862207	■	700 mA	9.8-19.6 W	14-28 V/DC	127 mm	44 mm	28 mm	**€ 31.95**
862208	■	700 mA	19.0-40.0 W	28-56 V/DC	166 mm	52 mm	24 mm	**€ 37.95**
862264	■	900 mA	19.6-40.0 W	22-44 V/DC	166 mm	52 mm	25 mm	**€ 37.95**
862209	■	1050 mA	20.0-40.0 W	19-38 V/DC	166 mm	52 mm	25 mm	**€ 37.95**
862210	■	1050 mA	23.0-45.0 W	22-43 V/DC	166 mm	52 mm	25 mm	**€ 39.95**
862211	■	1300 mA	25.0-50.0 W	20-39 V/DC	166 mm	52 mm	25 mm	**€ 41.95**

CC | 110 | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | QUICK DESIGN

- **Particularly quick and easy to install with integrated three-pin feed-through wiring**
- **Push terminals for wires from 0.5 to 1.5 mm²**
- **Push terminals also on secondary side**
- **No additional installation material required**
- **Can be dimmed using compatible [C-compatible] trailing-edge phase dimmers**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing Plastic Height 32 mm
Length 208 mm Rated Input Voltage 220-240 V/AC
Width 60 mm

Article		Output Current	Power	Output Voltage	Price
862257	■	450 mA	9.9-19.0 W	22-42 V/DC	**€ 29.95**
862258	■	1050 mA	23.1-44.1 W	22-42 V/DC	**€ 37.95**
862259	■	1500 mA	40.5-63.0 W	27-42 V/DC	**€ 45.95**

CC | 110 | SELV | 1 CH | IP20

HEP POWER SUPPLY UNIT CC DIM | G6LT15W350LR-Z

- **Can be dimmed using trailing-edge phase dimmers**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Length	85 mm
Output Current	350 mA	Width	40.4 mm
Power	9.1-15 W	Height	22 mm
Output Voltage	26-43 V/DC	Rated Input Voltage	220-240 V/AC

Article		Price
862266		**€ 25.95**

CC | 110 | SELV | 1 CH | IP20

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

DEKO-LIGHT MULTI-CURRENT DALI 2.0 POWER SUPPLIES DALI 2 IE-12D| IE-25D | IE-45D | IE-45HD| IE-75D

A must for every electrician: the new MULT-CC DALI 2.0 power supplies from DEKO-LIGHT are a real all-purpose weapon for universal use.

They can be controlled via DALI1 or DALI2 [fully upward and downward compatible] or via Intelli-Push. In this case, the multi-current-power supplies do not require any additional control components and are controlled by means of cost-effective 230V standard push-buttons. With the new Intelli-Push function, they also have a pioneering synchronisation option if one of the connected power supplies no longer runs synchronously with the others.

In addition, the MULTI-power supplies can also be operated undimmed without control as a reliable and universal power supplier. With a total of five models, the new DALI series covers a CC current range from 180mA to 1600mA and power ratings from 4 to 75 watts.

- plastic housing
- compact housing design
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- current range adjustable via DIP switch
- DALI 2 BUS ready according to IEC 62386
- fully downward compatible with DALI 1
- dimming range: 1-100%
- dimmable via DALI or touch dimmer function [push] new Intelli-Push function [key combination synchronises all connected power supplies]
- can also be operated without control as universal power supply unit universal power supply [no dimming function]
- 3.2-75 watts and 37 CC variants in only 3 different housing sizes

design example 114 x 52 x 24 mm

design example 133 x 71 x 24 mm

design example 159 x 79 x 30 mm



controllable with DALI2, DALI1
or by touch dim using
a regular 230V push-button

TOUCH-DIM / INTELLI-PUSH VIA 230V PUSH BUTTON WITHOUT ADDITIONAL CONTROL:

press button short	switch lamp on/off
press button long	dim lamp bright/dark/bright
press button for 15 seconds	All connected power supplies are synchronised to the same brightness.

DALI

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | MULTI-CURRENT DALI

- **Can be dimmed using Dali1/Dali2**
- **Can be dimmed using 230 V push button [on/off, brightness]**
- **Intelli-Push function [shortcut synchronises all connected power supply units when needed]**
- **Current range adjustable using DIP switch**
- **Can be operated without actuation/dimming**
- **Dimming range 1-100 %**
- **Flicker-free**
- **Short circuit/overload protection, overheating protection**

Housing Plastic Rated Input Voltage 220-240 V/AC

Article		Technical Description	Length	Width	Height	Price
862190	■	180 mA/3.2-9.8 W/18-54 V 230 mA/4.0-12.0 W/18-52 V 260 mA/4.0-12.0 W/15-46 V 300 mA/4.5-12.0 W/15-42 V 350 mA/5.2-12.0 W/15-34 V 400 mA/6.0-12.0 W/15-30 V 450 mA/6.8-12.0 W/15-27 V 500 mA/7.5-12.0 W/15-24 V	119 mm	52 mm	22.5 mm	**€ 47.95**
862191	■	260 mA/5.0-15.5 W/20-60 V 350 mA/7.0-20.0 W/20-60 V 400 mA/8.0-24.0 W/20-60 V 450 mA/9.0-25.0 W/20-55 V 500 mA/10.0-25.0 W/20-50 V 550 mA/11.0-25.0 W/20-45 V 600 mA/12.0-25.0 W/20-42 V 700 mA/14.0-25.0 W/20-36 V	119 mm	52 mm	22.5 mm	**€ 51.95**
862192	■	350 mA/8.75-24.5 W/25-70 V 500 mA/12.5-35.0 W/25-70 V 600 mA/15.0-42.0 W/25-70 V 700 mA/17.5-45.0 W/25-64 V 800 mA/20.0-45.0 W/25-56 V 900 mA/22.5-45.0 W/25-50 V 1,050 mA/25.0-45.0 W/21-43 V	135 mm	72 mm	24 mm	**€ 55.95**
862193	■	1,050 mA/14.7-45.0 W/14-43 V 1,150 mA/16.1-45.0 W/14-39 V 1,200 mA/16.8-45.0 W/14-38 V 1,300 mA/18.2-45.0 W/14-35 V 1,400 mA/19.6-45.0 W/14-32 V 1,500 mA/21.0-45.0 W/14-30 V 1,600 mA/22.4-45.0 W/14-28 V	135 mm	72 mm	24 mm	**€ 55.95**
862194	■	1,050 mA 26.3-74.5 W/25-71 V 1,150 mA 28.8-74.8 W/25-65 V 1,200 mA 30.0-74.4 W/25-62 V 1,300 mA 32.5-75.5 W/25-58 V 1,400 mA 35.0-74.2 W/25-53 V 1,500 mA 37.5-75.0 W/25-50 V 1,600 mA 40.0-75.2 W/25-47 V	159 mm	79 mm	30 mm	**€ 67.95**

CC | 110 | M M | SELV | 1 CH | IP20

electr. data		dimmable via				usage / design			electrical limit values		power supply	
current strength	power	electronic power supply	conventional transformer	leading edge	leading cut-off	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
electronic power supply units:												
12V	0,0-70,0 W	x			x	x		basic	97.79nF	B10A=8, B16A=14, C10A=18, C16A=29	180515	819
12V	0,0-105,0 W	x			x	x		basic	139.58nF	B10A=5, B16A=9, C10A=12, C16A=19	180529	819
wound transformers:												
12V	11,5-20,0 W		x	x		x		*			000097	819
12V	34,5-60,0 W		x	x		x		*			000099	819
12V	60,5-105,0 W		x	x		x		*			000107	819
12V	86,5-150,0 W		x	x		x		*			000103	819
12V	115,0-200,0 W		x	x		x		*			000104	819
12V	172,5-300,0 W		x	x		x		*			000106	819
12V	287,5-500,0 W		x	x		x		*			000109	819

DEKO-LIGHT TRANSFORMER CV DIM | ULTRA 12 VOLT/AC

- **Can be dimmed using trailing-edge phase dimmers**
- **11.5 V lamp-friendly voltage**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**
- **180515: 0-70 W halogen or 0-50 W LED/max. 6 LEDs**
- **180529: 0-105 W halogen or 0-50 W LED/max. 6 LEDs**

Housing	Plastic	Width	44 mm
Output Voltage	11.5 V/AC	Height	28 mm
Length	113 mm	Rated Input Voltage	220-240 V/AC

Article		Power	Price
180529	■	0.0-105.0 W	**€ 18.95**
180515	■	0.0-70.0 W	**€ 14.95**

CV | 110 | M M | SELV | 1 CH | IP20

ABN TRANSFORMERS CV DIM | 12 VOLT/AC

- **Conventional wound transformer [L load]**
- **11.5 V lamp-friendly voltage**
- **Can be dimmed using leading-edge phase dimmers**

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Output Voltage	11.5 V/AC		

Article		Power	Apparent power	Length	Width	Height	Price
000097	□	11.5-20.0 W	20 VA	82 mm	56 mm	50 mm	**€ 71.95**
000099	□	34.5-60.0 W	60 VA	100 mm	70 mm	61 mm	**€ 105.95**
000107	□	60.0-105.0 W	105 VA	107 mm	78 mm	66 mm	**€ 129.95**
000103	□	86.5-150.0 W	150 VA	130 mm	88 mm	78 mm	**€ 154.95**
000104	□	115.0-200.0 W	200 VA	130 mm	88 mm	88 mm	**€ 179.95**
000106	□	172.0-300.0 W	300 VA	130 mm	88 mm	103 mm	**€ 199.95**
000109	□	287.5-500.0 W	500 VA	177 mm	107 mm	130 mm	**€ 349.95**

CV | 1 CH | IP20

Accessories for **000103**, **000104**, **000106**
000111 Housing Pyra 120-300 VA **€ 16.95**

Accessories for **000107**
000110 Housing Pyra 105 VA **€ 16.95**

ON
W
OFF
IP65

CONTROLLER

850 Casambi Bluetooth
852 DALI / DMX dimmer
824 RF-Smart

controller

■ □
page 826

■ □
page 827

■ □
page 828

■
page 831

■
page 832

■
page 834

■
page 835

□ ■
page 836

■
page 841

□
page 843

□
page 844

□
page 847

page 848

page 849

page 850

page 850

page 851

page 851

page 852

page 852

page 853

page 854

page 854

page 855

page 855

RF-SMART: COMPONENTS

We hereby present the multifunctional RF-smart control system from DEKO-LIGHT. It enables the switching and dimming of devices with 230V mains voltage and offers LED dimmers for LED strips with 1-5 channels from 12V to 48V voltage. Dimmers in IP67 design are available for outdoor use. The system is complemented by luminaires with an integrated RF module, such as outdoor spotlights and LED retrofit luminaires. RF-smart components can be controlled with RF radio remote controls and Zigbee 3.0 compatible radio modules. This enables control via smartphone, tablet or voice and offers comprehensive smart home functions. Installation is quick and easy.

RF-smart — simple control via RF remote controls

zigbee — smart control via ZigBee 3.0

Taster — control via push-button

remote controls
The remote controls can be used to control the components on different channels in one or more zones. The remote controls are available as mobile versions or for wall mounting.

- 1 zone [1-2 oder 3-5 channels]
- 4 zones [1-5 channels]
- 8 zones [1-5 channels]
- power supply via 2x AAA batteries [3V]
- 230V direct connection [optional]

PIR motion detector
The PIR motion detector detects movement at an angle of 120° and a range of 1 to 7 metres - ideal for precise, energy-efficient lighting control.

- power supply
  via 1x CR123A battery

page 848

repeater
With the repeater, the wireless range of the remote controls can be extended by up to 30 metres.

- 230V AC

page 847

illuminants
The LED retrofit illuminants are equipped with an RF-smart radio module and fit into standard GU10 and E27 sockets.

- GU10 RGB+CCT
- E27 A60/MAX RGB+CCT
- 230V AC
- controllable via remote control and ZigBee 3.0

RF-smart zigbee

page 863

page 865

page 866

luminaires
The RF-smart lights are equipped with a ZigBee-compatible wireless module and can therefore also be controlled via the market-leading smart home systems from Amazon, Google & Co.

- FLOOD RGB+CCT
- SPOT RGB+CCT
- 230V AC
- IP67 / IP44
- controllable via remote control and ZigBee 3.0

RF-smart zigbee

page 540

page 509

page 510

Triac dimmer
The triac dimmers work with phase cut-off dimming and enable the switching and/or dimming of devices with 230V mains voltage.

- 230V AC
- IP20 / IP67
- on/off, Dimmen
- controllable via remote control, push-button and ZigBee 3.0

RF-smart zigbee Taster

page 832

page 833

LED dimmer
The LED dimmers can be used to control LED stripes with 1-5 channels and 12V to 48V voltage.

- 12-48V DC
- IP20 / IP67
- on/off, dimming, automatic programmes, RGB/CCT colour settings
- controllable via remote control, push-button and ZigBee 3.0

RF-smart zigbee Taster

page 834

page 835

NEW RF-smart zigbee

DEKO-LIGHT RF-SMART STARTER-SET 4, 230V TRIAC DIMMER + RF PUSH-BUTTON REMOTE CONTROL

- **Easy commissioning and operation (on/off - light-dark-bright)**
- **Light switch haptics**
- **Fits perfectly into existing switch programmes**
- **Intelli-Push Dim function (on/off, brightness) via potential-free push-button**
- **can also be controlled with all RF-Smart remote controls**
- **controllable with all Zigbee 3.0 compatible controllers / apps (gateway required)**
- **Program and remote control synchronisation when operating multiple RF Smart components (repeater function)**
- **Control of 230 V (R/C) components**
- **Minimum brightness adjustable in ten levels**
- **Switch mode adjustable (dimming deactivated)**
- **Up to 10x LED-LM / 7x LED ballast can be connected (max. 300 W for R/C loads)**
- **one control zone**
- **Mounting using adhesive pad or screws**
- **Operation remote control with 1x CR 2032 battery (not included)**
- **Set consisting of: 1 x 843503 / 1 x 843535**

Housing	Plastic	Control	RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim
Power	1.0-300 W		
Output Current	1.36 A	Channels	1
Rated Input Voltage	100-240 V/AC		

Article	Price
843537	**€ 75.95**

1 CH IP20

Accessories

843536 Battery, Varta, CR2032, Lithium 3 V **€ 3.95**

RF-smart zigbee

DEKO-LIGHT RF-SMART STARTER-SET 1, 230V TRIAC DIMMER + RF-REMOTE CONTROL

- **Dimmable brightness**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with all RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of 230 V [R/C] components**
- **Minimum brightness adjustable in ten steps**
- **Adjustable switch mode [dimming disabled]**
- **Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]**
- **One control zone**
- **Remote control requires 2x AAA batteries [not included in the scope of delivery]**
- **Set consisting of: 1x 843503 + 1x 843508**

Housing	Plastic	Rated Input Voltage	100-240 V/AC
Length	49 mm	Control	RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim
Power	1.0-300 W		
Output Current	1.36 A	Channels	1

Article	Price
843500	**€ 79.95**

1 CH IP20

NEW RF-smart zigbee

DEKO-LIGHT RF-SMART STARTER-SET 5, LED DIMMER + RF PUSH-BUTTON REMOTE CONTROL SINGLE

- **Easy commissioning and operation (on/off - light-dark-bright)**
- **Light switch haptics**
- **Fits perfectly into existing switch programmes**
- **Intelli-Push Dim function (on/off, brightness) via pontential-free push-button**
- **Soft-On / Soft-Off for gentle switching on / off**
- **additionally controllable with all RF-Smart radio remote controls**
- **controllable with all Zigbee 3.0 compatible controllers / apps (gateway required)**
- **Program and remote control synchronisation when operating multiple RF Smart components (repeater function)**
- **Control of single components**
- **flicker-free (image/video recordings)**
- **Power: max. 20 A / controller, max. 10 A / channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**
- **one control zone**
- **Mounting with adhesive pad or screws**
- **Operation remote control with 1x CR2032 battery (not included)**
- **Set consisting of: 1 x 843505 / 1 x 843535**

Housing	Plastic	Control	RF-Smart, ZigBee 3.0, Intelli Push-Dim
Output Current	20 A		
Rated Input Voltage	12-48 V/DC	Channels	1

Article	Price
843538	**€ 75.95**

CV 1 CH IP20

Accessories

843536 Battery, Varta, CR2032, Lithium 3 V **€ 3.95**

RF-smart zigbee

DEKO-LIGHT RF-SMART STARTER-SET 2, LED-DIMMER + RF-REMOTE CONTROL SINGLE/CCT

- **Dimmable brightness and colour saturation**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with all RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of single/CCT components**
- **Flicker-free [images/videos]**
- **Power: max. 20 A/controller, max. 10 A/channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**
- **One control zone**
- **Remote control requires 2x AAA batteries [not included in the scope of delivery]**
- **Set consisting of: 1x 843505 + 1x 843508**

Housing	Plastic	Control	RF-Smart, ZigBee 3.0, Intelli Push-Dim
Output Current	20 A		
Rated Input Voltage	12-48 V/DC	Channels	1, 2

Article		Price
843501	■□	**€ 79.95**

CV | 1 CH | 2 CH | IP20

RF-smart zigbee

DEKO-LIGHT RF-SMART STARTER-SET 3, LED-DIMMER + RF-REMOTE CONTROL RGB/RGBW/RGB+CCT

- **Dimmable brightness and colour saturation**
- **16 million adjustable colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of RGB components**
- **Flicker-free [images/videos]**
- **Power: max. 20 A/controller, max. 10 A/channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**
- **One control zone**
- **Remote control requires 2x AAA batteries [not included in the scope of delivery]**
- **Set consisting of: 1x 843505 + 1x 843510**

Housing	Plastic	Control	RF-Smart, ZigBee 3.0, Intelli Push-Dim
Output Current	20 A		
Rated Input Voltage	12-48 V/DC	Channels	3

Article	Price
843502	**€ 79.95**

CV | 3 CH | IP20

NEW RF-smart zigbee

DEKO-LIGHT RF-SMART STARTER-SET 6, RGB/W/CCT

- **Brightness and colour saturation dimmable**
- **16 million colours or colour temperature adjustable**
- **18 automatic programmes pre-installed**
- **Convenient operation via stand / handheld remote control**
- **Soft-On / Soft-Off for gentle switching on / off**
- **Intelli-Push Dim function (on/off, brightness) via potential-free push-button**
- **Controllable with RF-Smart radio remote controls**
- **controllable with all Zigbee 3.0 compatible controllers / apps (gateway required)**
- **Program and remote control synchronisation when operating multiple RF Smart components (repeater function)**
- **Control of single / WW-CW / RGB / RGBW / RGB+CCT components**
- **flicker-free (image / video recordings)**
- **Power: max. 20 A / controller, max. 10 A / channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**
- **three control zones**
- **Operation remote control with 2 x AAA battery (not included)**
- **Set consisting of: 1 x 843505 / 1 x 843525**

Housing	Plastic	Control	RF-Smart, ZigBee 3.0, Intelli Push-Dim
Output Current	20 A		
Rated Input Voltage	12-48 V/DC	Channels	1, 2, 3, 4, 5

Article		Price
843542	■	**€ 91.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

RF-smart zigbee

DEKO-LIGHT RF-SMART TRIAC DIMMER 230 V

- **Dimmable brightness**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of 230 V (R/C) components**
- **Minimum brightness adjustable in ten steps**
- **Adjustable switch mode [dimming disabled]**
- **Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]**

Output Current	1.36 A	Power	1.0-300 W
Housing	Plastic	Rated Input Voltage	100-240 V/AC
Length	49 mm	Control	RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim
Width	49 mm		
Height	25 mm	Channels	1

Article		Price
843503	■	**€ 55.95**

1 CH IP20

IP67 RF-smart zigbee

DEKO-LIGHT RF-SMART OUTDOOR TRIAC-DIMMER 230V

- **Dimmable brightness**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of 230 V (R/C) components**
- **Minimum brightness adjustable in ten steps**
- **Adjustable switch mode [dimming disabled, additional load relays can be connected]**
- **Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]**
- **IP67 outdoor distribution board with up to four cable entry points from 4-14 mm and two blanking plugs**

Output Current	1.36 A	Power	1.0-300 W
Housing	Plastic	Rated Input Voltage	100-240 V/AC
Length	170 mm	Control	RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim
Width	155 mm		
Height	65 mm	Channels	1

Article		Price
843504	■	**€ 71.95**

1 CH IP67

DEKO-LIGHT RF-SMART LED-DIMMER 5-IN-1, 5 CHANNEL SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness and colour saturation**
- **16 million adjustable colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**
- **Flicker-free [images/videos]**
- **Power: max. 20 A/controller, max. 10 A/channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	120 mm	Control	RF-Smart, ZigBee 3.0, Intelli Push-Dim
Width	47 mm	Channels	1, 2, 3, 4, 5
Height	23 mm		
Output Current	20 A		

Article		Price
843505	■	**€ 55.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

IP67 RF-smart zigbee

DEKO-LIGHT RF-SMART OUTDOOR LED-DIMMER 5-IN-1, 5 CHANNEL SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness and colour saturation**
- **16 million adjustable colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**
- **Flicker-free [images/videos]**
- **Power: max. 20 A/controller, max. 10 A/channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**
- **Input/output pre-fitted on each 20 cm connecting cable**

Housing	Plastic	Output Current	20 A
Length	185 mm	Rated Input Voltage	12-48 V/DC
Width	87 mm	Control	RF-Smart, ZigBee 3.0
Height	31 mm	Channels	1, 2, 3, 4, 5

Article		Price
843506	■	**€ 87.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP67

RF-smart

DEKO-LIGHT RF-SMART RF-REMOTE CONTROL, SINGLE/CCT

- **Dimmable brightness**
- **Adjustable colour temperature, if necessary**
- **One control zone**
- **Range approx. 30 m**
- **Can be used as a wall-mounted or hand-held remote control [magnetic holder included in the scope of delivery]**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Control of single/CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Height	24 mm	Control	RF-Smart
Ø	70 mm	Channels	1, 2

Article		Price
843508	□	**€ 30.95**
843509	■	**€ 30.95**

1 CH | 2 CH | IP20

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

DEKO-LIGHT RF-SMART RF-REMOTE CONTROL, RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours**
- **Automatic programs can be controlled**
- **One control zone**
- **Range approx. 30 m**
- **Can be used as a wall-mounted or hand-held remote control [magnetic holder included in the scope of delivery]**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Control of RGB components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Height	24 mm	Control	RF-Smart
Ø	70 mm	Channels	3

Article		Price
843510	☐	**€ 30.95**
843511	■	**€ 30.95**

3 CH IP20

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

DEKO-LIGHT RF-SMART RF REMOTE CONTROL, 3 ZONES, SINGLE

- **Dimmable brightness**
- **Up to three different control zones**
- **Three storable scenes**
- **Range approx. 30 m**
- **Can be used as a stand/handheld remote control**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Controls single components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	143 mm	Control	RF-Smart
Width	57 mm	Channels	1
Height	44 mm		

Article		Price
843523	■	**€ 39.95**

1 CH | IP20

DEKO-LIGHT RF-SMART RF REMOTE CONTROL, 3 ZONES, SINGLE/CCT

- **Dimmable brightness**
- **Up to three different control zones**
- **Three storable scenes**
- **Range approx. 30 m**
- **Can be used as a stand/handheld remote control**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Controls CCT and/or single components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	143 mm	Control	RF-Smart
Width	57 mm	Channels	1, 2
Height	44 mm		

Article		Price
843524	■	**€ 39.95**

1 CH | 2 CH | IP20

DEKO-LIGHT RF-SMART RF-REMOTE CONTROL, 3 ZONES SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Can be used as a stand/handheld remote control**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Separate white light button**
- **Automatic program and program speed can be controlled**
- **Up to three different control zones**
- **Range approx. 30 m**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Controls single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	143 mm	Control	RF-Smart
Width	57 mm	Channels	1, 2, 3, 4, 5
Height	44 mm		

Article		Price
843525	■	**€ 39.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

DEKO-LIGHT RF-SMART RF-REMOTE CONTROL, 8 ZONES SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Separate white light button**
- **Automatic program and program speed can be controlled**
- **Up to eight different control zones**
- **Range approx. 30 m**
- **Wall bracket included in the scope of delivery**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	153 mm	Control	RF-Smart
Width	47 mm	Channels	1, 2, 3, 4, 5
Height	19 mm		

Article	Price
843512	**€ 39.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

DEKO-LIGHT RF-SMART PUSH-BUTTON WALL-MOUNTED REMOTE CONTROL 1 ZONE

- **Easy commissioning and operation (on/off - light-dark-bright)**
- **Light switch haptics**
- **Fits perfectly into existing switch programmes**
- **one control zone**
- **Range approx. 30 m**
- **Mounting with adhesive pad or screws**
- **Battery operation with 1x CR 2032 battery (not included)**
- **Low power consumption**
- **Control of single components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	86 mm	Control	RF-Smart
Width	86 mm	Channels	1
Height	14.5 mm		

Article	Price
843535	**€ 21.95**

1 CH IP20

Accessories

843536 Battery, Varta, CR2032, Lithium 3 V **€ 3.95**

DEKO-LIGHT RF-SMART RF-WALL REMOTE CONTROL, 4 ZONES, 3V, SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Automatic program and program speed can be controlled**
- **Separate white light button**
- **Up to four different control zones**
- **Range approx. 30 m**
- **Magnetic wall bracket included in the scope of delivery**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	86 mm	Control	RF-Smart
Width	86 mm	Channels	1, 2, 3, 4, 5
Height	16 mm		

Article		Price
843513	☐	**€ 55.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

RF-smart

DEKO-LIGHT RF-SMART RF WALL-MOUNTED REMOTE CONTROL, 4 ZONES, 230 V, SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Wall-mounted remote control for fixed installation**
- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Automatic program and program speed can be controlled**
- **Separate white light button**
- **Up to four different control zones**
- **Range approx. 30 m**
- **Simple operation**
- **Installation on 68 mm single switch box**
- **230 V/AC mains operation**
- **Low power consumption**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	100-240 V/AC
Length	86 mm	Control	RF-Smart
Width	86 mm	Channels	1, 2, 3, 4, 5
Height	9 mm		

Article		Price
843522	☐	**€ 59.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

DEKO-LIGHT RF-SMART RF WALL-MOUNTED REMOTE CONTROL, 8 ZONES, SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Automatic program and program speed can be controlled**
- **Separate white light button**
- **Up to eight different control zones**
- **Range approx. 30 m**
- **Delayed switch-off function [60 s]**
- **Simple commissioning**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Numerous installation options [68 mm switch socket for operating with optional 230 V power supply]**
- **Low power consumption**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	146 mm	Control	RF-Smart
Width	106 mm	Channels	1, 2, 3, 4, 5
Height	20 mm		

Article		Price
843514		**€ 87.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

Accessories

872144 RF-smart, 230 V power supply for 8-zone wall-mounted remote control (3 V DC) **€ 13.95**

IP67 RF-smart

DEKO-LIGHT RF-SMART RF-REPEATER

- **Extends the range of an RF remote control by up to 30 m**
- **Supports up to 12 remote controls and/or 12 zones simultaneously**
- **Suitable for outdoor and indoor use**
- **Incl. 1 m connecting cable with IP44 mains plug**
- **Compatible with all RF-smart remote controls**

Housing	Plastic	Height	34 mm
Length	103 mm	Rated Input Voltage	100-240 V/AC
Width	34 mm	Control	RF-Smart

Article		Price
843507		**€ 27.95**

IP67

DEKO-LIGHT RF-SMART PIR MOTION DETECTOR

- **Can be rotated/swivelled 360°**
- **Self-adhesive magnetic holder included in the scope of delivery**
- **Very simple installation and operation**
- **Detection angle: 120°**
- **Detection range: 1-7 m**
- **RF range: approx. 30 m**
- **Switches on all RF-smart dimmers, lights/lamps (even when combined with other RF-smart remote controls)**
- **Motion detector can switch several dimmers, lights/lamps at the same time**
- **Controls the night light mode of all RF-smart dimmers, lights/lamps (843512 required for programming)**
- **Preset switching time and daylight threshold value**
- **Switching time can be adjusted (843512 required for programming)**
- **Daylight threshold value can be adjusted (843512 required for programming)**
- **Battery-operated with 1x CR123A [not included in the scope of delivery]**
- **Low power consumption**

Housing	Plastic	Rated Input Voltage	3 V/DC
Height	56 mm	Control	RF-Smart
Ø	49 mm	Channels	1

Article		Price
843527	☐	**€ 30.95**

1 CH | IP54

Accessories

843528	Photo battery, CR 123 A, lithium 3 V / 1600 mAh	**€ 7.95**
843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20	**€ 55.95**
843504	RF-smart, Triac dimmer, 230 V, 300 W, IP67	**€ 71.95**
843505	RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP20	**€ 55.95**
843506	RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP67	**€ 87.95**
843532	RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree	**€ 37.95**
843533	RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad	**€ 37.95**
843534	RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad	**€ 51.95**
843518	RF-smart, Flood, 230 V, 30 W, RGB+CCT, IP65	**€ 199.95**
843519	RF-smart, Flood, 230 V, 50 W, RGB+CCT, IP65	**€ 279.95**
843520	RF-smart, Flood, 230 V, 100 W, RGB+CCT, IP65	**€ 439.95**
843521	RF-smart, Spot, 230 V, 25 W, RGB+CCT, IP65	**€ 191.95**
843530	Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, white	**€ 159.95**
843531	Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, black	**€ 159.95**

RF-SMART DMX GATEWAY

- **RF gateway for operation on standard DMX controllers**
- **Easy to couple DMX systems to the RF-smart system**
- **Controls all RF-smart dimmers, lights/lamps (even when combined with other RF-smart remote controls)**
- **DMX start address can be adjusted via menu keys**
- **Status LED**
- **Up to 16 differently controllable zones of 1-5 channels**
- **Suitable for single/CCT/RGB/W+CCT components**
- **Occupies 80 DMX channels (regardless of actual channel usage)**
- **Power supply via supplied USB cable (USB power adapter 5 VDC not included in the scope of delivery)**
- **Does not support the RF-smart repeater function**
- **RF range: approx. 30 m**

Housing	Plastic	Power	2.5 W
Length	188 mm	Rated Input Voltage	5 V/DC
Width	47 mm	Control	RF-Smart
Height	23 mm	Channels	1, 2, 3, 4, 5

Article		Price
843529	■	**€ 47.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

Accessories

930887	USB-A plug-in power supply 5 V DC, 1,000 mA, black	**€ 6.95**
843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20	**€ 55.95**
843504	RF-smart, Triac dimmer, 230 V, 300 W, IP67	**€ 71.95**
843505	RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP20	**€ 55.95**
843506	RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP67	**€ 87.95**
843532	RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree	**€ 37.95**
843533	RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad	**€ 37.95**
843534	RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad	**€ 51.95**
843518	RF-smart, Flood, 230 V, 30 W, RGB+CCT, IP65	**€ 199.95**
843519	RF-smart, Flood, 230 V, 50 W, RGB+CCT, IP65	**€ 279.95**
843520	RF-smart, Flood, 230 V, 100 W, RGB+CCT, IP65	**€ 439.95**
843521	RF-smart, Spot, 230 V, 25 W, RGB+CCT, IP65	**€ 191.95**
843530	Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, white	**€ 159.95**
843531	Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, black	**€ 159.95**

CASAMBI BLUETOOTH CBU-TED | 230 V SWITCHING/DIMMING

- **suitable for R loads [incandescent bulb, high-voltage halogen]**
- **suitable for C loads [dimmable high-voltage LED, electrical power supply units]**
- **Power in switching range: incandescent bulb, high-voltage halogen, high-voltage LED, electrical ballasts: max. 150 W**
- **Output in dimming range: dimmable high-voltage LED, electrical ballasts: max. 50 W/ max. two components**
- **suitable for 230 V AC lights**
- **Install the Casambi module in a distributor box, suspended ceiling or similar**
- **Control and configuration via smartphone app**

Housing	Plastic	Power	1.0-50 W
Length	40.4 mm	Rated Input Voltage	220-240 V/AC
Width	36.3 mm	Control	Casambi
Height	14 mm	Channels	1

Article		Price
843008	☐	**€ 115.95**

1 CH | IP20

CASAMBI BLUETOOTH CBU-ASD | DALI/0-10 V | 1-10 V

- **Module generates either DALI, 0-10 V or 1-10 V control signal**
- **Control signal for each ballast unit or power supply unit**
- **Install the Casambi module in a distributor box, suspended ceiling or similar**
- **Control and configuration via smartphone app**

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Length	56.5 mm	Control	Casambi
Width	35.8 mm	Channels	1
Height	22.3 mm		

Article		Price
843011	☐	**€ 119.95**

1 CH | IP20

CASAMBI BLUETOOTH CBU-PWM4 | LED ONE- TO FOUR-CHANNEL DIMMER

- **Module suitable for controlling 12 V/24 V LED strips**
- **One to four channels [WW, CW, WW-CW, RGB, RGBW]**
- **Power: 144 W at 24 V, 72 W at 12 V**
- **Install the Casambi module in a distributor box, suspended ceiling or similar**
- **Control and configuration via smartphone app**

Housing	Plastic	Output Current	6 A
Length	72.6 mm	Rated Input Voltage	12-24 V/DC
Width	30 mm	Control	Casambi
Height	18 mm	Channels	1, 2, 3, 4

Article		Price
843037	☐	**€ 143.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | IP20

CASAMBI BLUETOOTH WALL-MOUNTED CONTROLLER XPRESS

- **Bluetooth wall controller compatible with Casambi system**
- **Installation with screws or adhesive tape**
- **No wiring required**
- **Battery operation [3 V button cell]**
- **Configured via smartphone app**

Housing	Plastic	Height	12 mm
Length	90 mm	Rated Input Voltage	3 V/DC
Width	90 mm	Control	Casambi

Article		Price
843049	■	**€ 319.95**
843050	☐	**€ 319.95**

IP20

DEKO-LIGHT MULTI-DIMMER 4, 4-CHANNEL 3-IN-1 CONTROL/PWM DIMMER

- **Easy programming of all settings incl. memory function**
- **3-IN-1 control DMX / automatic / manual**
- **Use as 1, 2, 3, 4 channel dimmer, individually dimmable**
- **24 colour change programmes pre-installed [automatic mode]**
- **Flicker-free 2kHz for image and video recordings**
- **DMX signal / master-slave pluggable via CAT5**

Performance:

- **4x 60W [240W] at 12V, 4x 120W [480W] at 24V, 4x 240W [960W] at 48V**
- **max. 20A [4x 5A per channel]**

Housing	Metal	Output Current	20 A
Length	116 mm	Rated Input Voltage	12-48 V/DC
Width	57 mm	Channels	1, 2, 3, 4
Height	26.8 mm		

Article		Price
843279	■	**€ 91.95**

CV | DMX | 1 CH | 2 CH | 3 CH | 4 CH | IP20

DEKO-LIGHT R-DMX 3+1

- **complies with DMX 512/1990, RDM protocol/2009**
- **supports automatic DMX address assignment**
- **incl. DIN rail adapter and 2 m CAT5 cable [RJ45]**
- **flicker-free**

Performance:

- **4x 48W [192W] at 12V, 4x 96W [384W] at 24V**
- **max. 16A [4x 4A per channel]**

Housing	Metal	Output Current	16 A
Length	120 mm	Rated Input Voltage	12-24 V/DC
Width	43 mm	Channels	1, 2, 3, 4
Height	23 mm		

Article		Price
843273	■	**€ 69.95**

CV | DMX | 1 CH | 2 CH | 3 CH | 4 CH | IP20

DALI

DALI TRIAC DIMMER

- **Can be controlled using DALI1/DALI2, DT6, one channel**
- **Can alternatively be controlled using push-dim button [8-230 V/AC]**
- **Dimmable brightness/trailing-edge phase dimmers**
- **Adjustable minimum brightness [push-dim only]**
- **Optimal for extending DALI systems or installing in Triac dimmable lighting due to its compact size**
- **LED output [C load] max. 200 W/230 V/max. 10x LM or ECG**
- **Halogen output [R load] 400 W/230 V, no limit on the number of lamps**
- **Power consumption at DALI bus: max. 2 mA**

Housing	Plastic	Output Current	1.8 A
Length	45.5 mm	Rated Input Voltage	100-240 V/AC
Width	45.5 mm	Control	DALI 1 / DT6, DALI 2 / DT6, Push-Dim
Height	20.3 mm		
Power	1.0-400 W	Channels	1

Article		Price
843340	☐	**€ 59.95**

1 CH | IP20

Accessories

930942 DIN rail/mounting adapter for Dali Triac dimmer **€ 1.45**

DALI

DEKO-LIGHT DALI LED PWM DIMMER 12-48 V, 1/2 CHANNEL

- **DT6 = occupies 2 Dali channels**
- **2x 1-channel mode (WW/CW) or 1x 2 channel mode (WW-CW, CCT)**
- **Can be dimmed 0-100 %, overload protection, reverse polarity protection**
- **Flicker-free, suitable for videos (PWM 2 kHz)**
- **For 12 V-48 V DC (CV) LED strips/lights**
- **Output power: 2x 8 A = 16 A**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	167 mm	Control	DALI 1 / DT6, DALI 2 / DT6
Width	51 mm		
Height	23 mm	Channels	1, 2
Output Current	16 A		

Article		Price
843341	☐	**€ 67.95**

CV | 1 CH | 2 CH | IP20

DALI

DEKO-LIGHT DALI DT8 LED PWM DIMMER 12-48 V, 2 CHANNEL

- **DT8 = occupies 1 Dali channel**
- **1x 2-channel mode (WW-CW, CCT)**
- **Can be dimmed 0-100 %, overload protection, reverse polarity protection**
- **Flicker-free, suitable for videos (PWM 2 kHz)**
- **For 12 V-48 V DC (CV) LED strips/lights**
- **Output power: 2x 8 A = 16 A**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	167 mm	Control	DALI 1 / DT8, DALI 2 / DT8
Width	51 mm		
Height	23 mm	Channels	2
Output Current	16 A		

Article		Price
843342	☐	**€ 67.95**

CV | 2 CH | IP20

DALI

DEKO-LIGHT DALI LED PWM DIMMER 12-48 V, 3/4 CHANNEL

- **DT6 = occupies 4 Dali channels**
- **1x 3-channel mode (RGB) or 1x 4-channel mode (RGBW)**
- **Can be dimmed 0-100 %, overload protection, reverse polarity protection**
- **Flicker-free, suitable for videos (PWM 2 kHz)**
- **For 12 V-48 V DC (CV) LED strips/lights**
- **Output power: 4x 4 A = 16 A**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	167 mm	Control	DALI 1 / DT6, DALI 2 / DT6
Width	51 mm		
Height	23 mm	Channels	1, 2, 3, 4
Output Current	16 A		

Article	Price
843343	**€ 75.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | IP20

DALI

DEKO-LIGHT DALI DT8 LED PWM DIMMER 12-48 V, 4 CHANNEL

- **DT8 = occupies 1 Dali channel**
- **1x 4-channel mode (RGBW)**
- **Can be dimmed 0-100 %, overload protection, reverse polarity protection**
- **Flicker-free, suitable for videos (PWM 2 kHz)**
- **For 12 V-48 V DC (CV) LED strips/lights**
- **Output power: 4x 4 A = 16 A**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	167 mm	Control	DALI 1 / DT8, DALI 2 / DT8
Width	51 mm		
Height	23 mm	Channels	4
Output Current	16 A		

Article	Price
843344	**€ 75.95**

CV | 4 CH | IP20

ILLUMINANTS

860 MR16 / GU53
861 G9 - GU10
864 E27
867 GX53

page 860

page 860

page 861

page 861

page 862

page 862

page 864

page 864

page 867

illuminants

NEW

LEDVANCE LED MR16

Housing	Glass	Ø	50 mm
Light Beam Angle	36 Degree	Rated Input Voltage	12 V/AC/DC
Life Time L70 / B50	15000 h	CRI (Ra)	80

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Power Consumption	Height	EEI	Price
180368	Colourless	WW 3000 K	210 lm	2.0 W	2 kWh/1000h	44 mm	E	**€ 7.95**
180748	Colourless	WW 3000 K	345 lm	3.4 W	4 kWh/1000h	44 mm	E	**€ 7.95**
180309	Colourless	NW 4000 K	210 lm	2.1 W	3 kWh/1000h	46 mm	F	**€ 7.95**
180318	Colourless	NW 4000 K	345 lm	3.4 W	4 kWh/1000h	44 mm	E	**€ 7.95**

MR16 GU5,3 | CV | IP20 | 1 CH | III

LEDVANCE LED MR16 DIMMABLE

NEW | Ra>90

Housing	Glass	Rated Input Voltage	12 V/AC/DC
Light Beam Angle	36 Degree	CRI (Ra)	90
Life Time L70 / B50	25000 h	Control	Dimmable via optional power supply unit
Height	44 mm		
Ø	50 mm		

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Power Consumption	EEI	Price
180746	Colourless	WW 3000 K	230 lm	2.2 W	3 kWh/1000h	E	**€ 10.95**
180749	Colourless	WW 3000 K	345 lm	3.4 W	4 kWh/1000h	E	**€ 11.95**
180751	Colourless	WW 3000 K	621 lm	6.1 W	7 kWh/1000h	E	**€ 21.95**
180264	Colourless	NW 4000 K	230 lm	3.4 W	4 kWh/1000h	G	**€ 11.95**
180750	Colourless	NW 4000 K	345 lm	3.4 W	4 kWh/1000h	E	**€ 11.95**

MR16 GU5,3 | CV | IP20 | 1 CH | III

LEDVANCE LED P PIN G9

Housing	Plastic	Life Time L70 / B50	15000 h
Colour Temperature	2700 K	Rated Input Voltage	220-240 V/AC
Light Beam Angle	300 Degree	CRI (Ra)	80

Article	Housing Color		Luminous Flux	Power	Power Consumption	Height	Ø	EEI	Price
180295	Colourless	WW	200 lm	1.9 W	2 kWh/1000h	43 mm	14 mm	F	**€ 5.95**
180287	Colourless	WW	320 lm	2.6 W	3 kWh/1000h	43 mm	14 mm	E	**€ 7.95**
180286	Colourless	WW	470 lm	4.2 W	5 kWh/1000h	49 mm	18 mm	E	**€ 10.95**

G9 | CV | IP20 | 1 CH

NEW

LEDVANCE LED GU10

Housing	Glass	Life Time L70 / B50	15000 h
Colour Temperature	2700 K	Height	54 mm
Luminous Flux	350 lm	Ø	50 mm
Power	3.7 W	Rated Input Voltage	220-240 V/AC
Light Beam Angle	36 Degree	CRI (Ra)	80
Power Consumption	4 kWh/1000h		

Article	Housing Color		Price
180752	Silver	WW	**€ 5.95**

GU10 | IP20 | 1 CH | A↑G E

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

NEW

PHILIPS MASTER VALUE LED GU10 DIMMABLE

Housing	Glass	Rated Input Voltage	220-240 V/AC
Height	54 mm	Control	Trailing-edge dimmer
Ø	50 mm	Channels	1

Article	Housing Color	Colour Temp.	Luminous Flux	Power	Light Beam Angle	Power Consump.	EEI	Price
180296	Silver	WW 2700 K	270 lm	2.8 W	36 Degree	3 kWh/1000h	E	**€ 7.95**
180744	Silver	WW 2700 K	345 lm	4.0 W	36 Degree	4 kWh/1000h	F	**€ 8.95**
180319	Silver	WW 2700 K	355 lm	3.7 W	60 Degree	4 kWh/1000h	E	**€ 9.95**
180317	Silver	WW 3000 K	365 lm	3.7 W	36 Degree	4 kWh/1000h	E	**€ 11.95**
180753	Silver	WW 3000 K	365 lm	3.7 W	60 Degree	4 kWh/1000h	E	**€ 9.95**
180297	Silver	WW 3000 K	575 lm	5.5 W	36 Degree	6 kWh/1000h	E	**€ 13.95**
180747	Silver	NW 4000 K	380 lm	3.7 W	36 Degree	4 kWh/1000h	E	**€ 11.95**
180299	Silver	NW 4000 K	380 lm	3.7 W	60 Degree	4 kWh/1000h	E	**€ 11.95**
180298	Silver	NW 4000 K	575 lm	5.5 W	36 Degree	6 kWh/1000h	E	**€ 13.95**

GU10 | IP20 | 1 CH

NEW | Ra>90 | SDCM<5

OSRAM PARATHOM LED GU10 DIMMABLE

Housing	Glass	Height	52 mm
Colour Temperature	2700 K	Ø	50 mm
Luminous Flux	575 lm	Rated Input Voltage	220-240 V/AC
Power	6.1 W	CRI (Ra)	90
Light Beam Angle	60 Degree	Control	Trailing-edge dimmer
Power Consumption	7 kWh/1000h	Channels	1
Life Time L70 / B50	25000 h		

Article	Housing Color	Price
180745	Silver WW	**€ 13.95**

GU10 | IP20 | 1 CH | A↑G E

RF-smart RGB+CCT zigbee

DEKO-LIGHT RF-SMART LAMP GU10 RGB+CCT WITH RF ZIGBEE CONTROL

- **Dimmable brightness and colour saturation**
- **16 million available colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all controllers/apps compatible with Zigbee 3.0, such as Amazon Echo [Alexa], Google Assistant and Tuya [relevant gateway required, outdoor range up to 100 m]**

Housing	Plastic	Height	57 mm
Colour Temperature	2700-6500 K	Ø	50 mm
Luminous Flux	300 lm	Rated Input Voltage	100-240 V/AC
Power	4 W	CRI (Ra)	80
Light Beam Angle	25 Degree	Control	RF-Smart, ZigBee 3.0
Power Consumption	4 kWh/1000h	Channels	5
Life Time L70 / B50	50000 h		

Article	Housing Color	Colour Temperature	Price
843532	White	RGB WW CW 2700-6500 K	**€ 37.95**

GU10 IP20 5 CH A↑G F

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 55.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 87.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 59.95**
843523	RF-smart, Standard Remote, black, 3 zones, Single	**€ 39.95**
843524	RF-smart, Standard Remote, black, 3 zones, Single/CCT	**€ 39.95**
843525	RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843527	RF-smart, PIR motion detector, white, 120deg/7m, 3V	**€ 30.95**
843529	RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT	**€ 47.95**

NEW

LEDVANCE LED RETROFIT E27 A60 DIMMABLE

Housing	Glass	Power Consumption	6 kWh/1000h
Colour Temperature	2700 K	Life Time L70 / B50	15000 h
Luminous Flux	806 lm	Rated Input Voltage	220-240 V/AC
Power	5.9 W	CRI (Ra)	80
Light Beam Angle	300 Degree	Control	Trailing-edge dimmer
Height	105 mm	Channels	1
Ø	60 mm		

Article	Housing Color		Price
180754	Colourless	WW	**€ 6.95**

E27 | IP20 | 1 CH | A↑G D

LEDVANCE LED CLASSIC E27 A75 DIMMABLE

Housing	Glass	Power Consumption	8 kWh/1000h
Colour Temperature	2700 K	Life Time L70 / B50	15000 h
Luminous Flux	1055 lm	Rated Input Voltage	220-240 V/AC
Power	7.5 W	CRI (Ra)	80
Light Beam Angle	360 Degree	Control	Trailing-edge dimmer
Height	105 mm	Channels	1
Ø	60 mm		

Article	Housing Color		Price
180277	Colourless	WW	**€ 10.95**

E27 | IP20 | 1 CH | A↑G D

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

RF-smart RGB+CCT zigbee

DEKO-LIGHT RF-SMART LAMP E27 A60 RGB+CCT WITH RF ZIGBEE CONTROL

- **Dimmable brightness and colour saturation**
- **16 million available colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all controllers/apps compatible with Zigbee 3.0, such as Amazon Echo [Alexa], Google Assistant and Tuya [relevant gateway required, outdoor range up to 100 m]**

Housing	Plastic	Power Consumption	6 kWh/1000h
Luminous Flux	550 lm	Life Time L70 / B50	50000 h
Power	6 W	Rated Input Voltage	100-240 V/AC
Light Beam Angle	220 Degree	CRI (Ra)	80
Height	100 mm	Control	RF-Smart, ZigBee 3.0
Ø	57 mm	Channels	5

Article	Housing Color	Colour Temperature	Price
843533	White	RGB WW CW 2700-6500 K	**€ 37.95**

E27 IP20 5 CH A↑G F

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 30.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 55.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 87.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 59.95**
843523	RF-smart, Standard Remote, black, 3 zones, Single	**€ 39.95**
843524	RF-smart, Standard Remote, black, 3 zones, Single/CCT	**€ 39.95**
843525	RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 39.95**
843527	RF-smart, PIR motion detector, white, 120deg/7m, 3V	**€ 30.95**
843529	RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT	**€ 47.95**

RF-smart RGB+CCT zigbee

DEKO-LIGHT RF-SMART LAMP E27 MAX RGB+CCT WITH RF ZIGBEE CONTROL

- **Dimmable brightness and colour saturation**
- **16 million available colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all controllers/apps compatible with Zigbee 3.0, such as Amazon Echo [Alexa], Google Assistant and Tuya [relevant gateway required, outdoor range up to 100 m]**

Housing	Plastic	Power Consumption	12 kWh/1000h
Luminous Flux	1100 lm	Life Time L70 / B50	50000 h
Power	12 W	Rated Input Voltage	100-240 V/AC
Light Beam Angle	220 Degree	CRI (Ra)	80
Height	147 mm	Control	RF-Smart, ZigBee 3.0
Ø	70 mm	Channels	5

Article	Housing Color	Colour Temperature	Price
843534	White	RGB WW CW 2700-6500 K	**€ 51.95**

E27 IP20 5 CH A↑G F

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20		**€ 30.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20		**€ 30.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT		**€ 55.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT		**€ 87.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT		**€ 59.95**
843523	RF-smart, Standard Remote, black, 3 zones, Single		**€ 39.95**
843524	RF-smart, Standard Remote, black, 3 zones, Single/CCT		**€ 39.95**
843525	RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT		**€ 39.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT		**€ 39.95**
843527	RF-smart, PIR motion detector, white, 120deg/7m, 3V		**€ 30.95**
843529	RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT		**€ 47.95**

ISOLED LED GX53

Housing	Aluminium	Height	28 mm
Power	6 W	Ø	75 mm
Light Beam Angle	120 Degree	Rated Input Voltage	220-240 V/AC
Power Consumption	6 kWh/1000h	CRI (Ra)	80
Life Time L70 / B50	25000 h		

Article	Housing Color	Colour Temperature	Luminous Flux	Price
180196	White	WW 3000 K	500 lm	**€ 17.95**
180195	White	NW 4000 K	525 lm	**€ 17.95**

GX53 | IP20 | 1 CH | A↑G D

KEBA
CE
M636 IP68 Max depth 6m
MIN 2305
MAX 3325
2AA 450VAC
The screws of cover are tightened
with 0.6Nm in IP test

ACCESSORIES

872 indoor
875 outdoor
883 chemical products

page 872

page 873

page 874

page 874

page 875

page 875

page 876

page 881

page 882

page 883



SAFETY SPACER

- **For safe installation of downlights in ceilings with insulating material**
- **Creates the necessary clearance around the light to enable better air circulation**
- **Observe the installation requirements of the specific light.**
- **For ceiling installation rings from dia. 62 to 90 mm**

Housing	Plastic	Ø	62 mm
Height	80 mm		

Article	Housing Color	Price
829063	Black	**€ 3.45**

SOCKET GU5,3

- **Heat-resistant connecting cable**
- **Ceramic fitting**

Housing	Ceramic	Power	35 W
Ø	17 mm	Secondary Connection End	Open cables
Rated Input Voltage	12 V/AC/DC	Connection Type	Open cables

Article	Housing Color	Length	Height	Secondary Cable Length	Price
100200	White		150 mm	0.15 m	**€ 0.75**
100250	White	500 mm	500 mm	0.5 m	**€ 1.25**

CV III

SOCKET GU10 (PROTECTION CLASS II)

Housing	Ceramic	Power	35 W
Height	150 mm	Primary Cable Length	15 cm
Ø	28 mm	Primary Connection End	With free strand / conductor ends
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Price
100202	White	**€ 1.55**

IP20 GU10

SOCKET GU10 (SAFETY CLASS I)

- **With spacer and connection box**
- **Separate connection for protective conductors**
- **When using installation rings, VDE regulations require a screw connection between the spacer and installation ring**

Housing	Ceramic	Primary Cable Length	10 cm
Rated Input Voltage	220-240 V/AC	Primary Connection End	Screw terminal
Power	35 W		

Article	Housing Color	Price
100204	White	**€ 3.25**

IP20 | GU10

DEKO-LIGHT QUICK CONNECTION BOX 2-WAY 230 V

- **Fast through-wiring of power supplies or lamps**
- **3-pin quick terminal for cables from 0.5 to 1.5 mm²**
- **15 cm pre-installed 3-pin cable for connecting SKI/SKII power supply units/lamps**
- **Quick-action closure secured with additional screw**
- **For inserting into ceilings with a round cut-out from 68 mm and a 25 mm ceiling cavity**

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Length	80 mm	Rated Current	16 A
Width	40 mm	Primary Connection End	Connection box IP20
Height	25 mm	Secondary Connection End	Open cables

Article	Housing Color	Price
930694	Black	**€ 4.95**

IP20

TRIAC-DIMMER TRAILING EDGE

- Suitable for dimming:
- **R loads (incandescent bulb) 10-350 W**
- **C loads (electrical ballasts) 10-350 W**
- **Max. five ballasts**
- **Adjustable minimum load/brightness**
- **Perfectly matched to DEKO-LIGHT power supply units**
- **Suitable for 68 mm flush-mounted/cavity wall sockets**

Housing	Plastic	Power	355 W
Length	83.5 mm	Control	Trailing-edge dimmer
Width	83.5 mm	Rated Current	1.6 A
Height	43.5 mm	Connection Type	Clamp
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Price
930060	White	**€ 53.95**

IP20 | 1 CH

IP67

OVERVOLTAGE PROTECTION WITH CONTROL DISPLAY

- **Compact protection of lights in the event of problems with the mains supply**
- **Prevents premature failure**
- **In the event of a fault, the overvoltage protection trips, protecting the light by disconnecting it from the mains supply**
- **Control LED to indicate the operating status**
- **Suitable for single-phase, non-dimmable lights**
- **With mounting bracket for installation in light fittings or junction boxes**

Housing	Plastic	Rated Current	10 A
Length	37 mm	Primary Connection End	With free strand / conductor ends
Width	30 mm	Secondary Connection End	Open cables
Height	20 mm		
Rated Input Voltage	230-277 V/AC		

Article	Housing Color	Price
843055	Black	**€ 15.95**

IP67

GROUND SPIKE WITH THREADED BUSHING

- **Robust design**
- **For anchoring surface-mounted spotlights in soil**

Article	Housing Color	Housing	Height	Ø	Price
930426	Black	Aluminium	170 mm	33 mm	**€ 7.95**
930427	Black	Aluminium	219 mm	43.8 mm	**€ 9.95**
700229	Black	Plastic	160 mm	43 mm	**€ 3.95**
730349	Black	Plastic	210 mm	45 mm	**€ 5.45**
700230	Black	Plastic	210 mm	50 mm	**€ 3.95**

WALL BRACKET/DISPLAY ARM

- **Robust housing**
- **Load capacity: max. 4.5 kg**
- **Ideal for illuminating advertising boards on façades**
- **Accessories for façade lighting**
- **Supplied without installation materials due to wide range of possible applications**

Housing	Metal	Width	150 mm
Length	800 mm	Height	100 mm

Article	Housing Color	Price
930659	Black	**€ 47.95**

WEIPU DISTRIBUTOR BOX

- **for wiring 12V/24V/48V DC outdoor components**
- **reverse polarity protected**
- **Robust design**
- **2 socket outlets**

Housing	Plastic	Height	38 mm
Length	57 mm	Rated Input Voltage	12-48 V/DC
Width	57 mm	Rated Current	8.5 A

Article	Secondary Connection End	Connection Type	Price
730300	WEIPU socket 2-pole	WEIPU plug 2-pole	**€ 51.95**
730301	WEIPU socket 4-pole	WEIPU plug 4-pole	**€ 54.95**
940010	WEIPU socket 5-pole	WEIPU plug 5-pole	**€ 62.95**

IP67

WEIPU HQ SOCKET / PLUG | 2-PIN

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Height	65 mm	Rated Current	8.5 A
Ø	27 mm		

Article	Connection Type	Price
940060	WEIPU plug 2-pole	**€ 10.95**
940058	WEIPU socket 2-pole	**€ 10.95**
940059	WEIPU socket 2-pole	**€ 10.95**

CV | IP67 | III

IP67

WEIPU HQ SOCKET / PLUG | 4-PIN

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Height	65 mm	Rated Current	8.5 A
Ø	27 mm		

Article	Connection Type	Price
940062	WEIPU plug 4-pole	**€ 11.95**
940061	WEIPU socket 4-pole	**€ 11.95**
940063	WEIPU socket 4-pole	**€ 11.95**

CV | IP67 | III

IP67

WEIPU HQ SOCKET / PLUG | 5-PIN

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Height	65 mm	Rated Current	8.5 A
Ø	27 mm		

Article	Connection Type	Price
940057	WEIPU plug 5-pole	**€ 12.95**
940056	WEIPU socket 5-pole	**€ 12.95**

CV | IP67 | III

IP67

WEIPU HQ FEEDER CABLE | SOCKET 2-PIN

Housing	Plastic	Rated Current	8.5 A
Ø	27 mm	Connection Type	WEIPU socket 2-pole
Rated Input Voltage	12-48 V/DC		

Article	Height	Price
940037	1000 mm	**€ 17.95**
940038	3000 mm	**€ 23.95**
940039	5000 mm	**€ 29.95**

CV IP67

IP67

WEIPU HQ FEEDER CABLE | SOCKET 4-PIN

Housing	Plastic	Rated Current	8.5 A
Ø	27 mm	Connection Type	WEIPU socket 4-pole
Rated Input Voltage	12-48 V/DC		

Article	Height	Price
940033	1000 mm	**€ 21.95**
940034	3000 mm	**€ 33.95**
940035	5000 mm	**€ 44.95**

CV IP67

IP67

WEIPU HQ FEEDER CABLE | SOCKET | 5-PIN

Housing	Plastic	Rated Current	8.5 A
Ø	27 mm	Connection Type	WEIPU socket 5-pole
Rated Input Voltage	12-48 V/DC		

Article	Height	Price
940029	1000 mm	**€ 25.95**
940030	3000 mm	**€ 37.95**
940031	5000 mm	**€ 47.95**

CV IP67

IP67

WEIPU HQ CONNECTION CABLE | 2-PIN

Housing	Plastic	Rated Current	8.5 A
Ø	27 mm	Secondary Connection End	WEIPU socket 2-pole
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU plug 2-pole

Article	Height	Price
940049	1000 mm	**€ 27.95**
940050	3000 mm	**€ 33.95**
940051	5000 mm	**€ 39.95**

CV IP67 III

IP67

WEIPU HQ CONNECTION CABLE | 4-PIN

Housing	Plastic	Rated Current	8.5 A
Ø	27 mm	Secondary Connection End	WEIPU socket 4-pole
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU plug 4-pole

Article	Height	Price
940045	1000 mm	**€ 33.95**
940046	3000 mm	**€ 45.95**
940047	5000 mm	**€ 54.95**

CV IP67 III

IP67

WEIPU HQ CONNECTION CABLE | 5-PIN

Housing	Plastic	Rated Current	8.5 A
Ø	27 mm	Secondary Connection End	WEIPU socket 5-pole
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU plug 5-pole

Article	Height	Price
940041	1000 mm	**€ 37.95**
940042	3000 mm	**€ 48.95**
940043	5000 mm	**€ 57.95**

CV IP67 III

IP68

MULTI OUTDOOR CABLE CONNECTOR | CONNECTION SLEEVE

- **Watertight M25 cable glands**
- **For two cables measuring 4-14 mm**
- **For two to five wires measuring 0.5-4 mm²**
- **Adapter sleeves included in scope of delivery**

Housing	PA 6.6 - Polyamide 6.6	Height	32.56 mm
Length	112.53 mm	Rated Input Voltage	12-450 V/AC
Width	29.5 mm	Rated Current	24 A

Article	Housing Color	Price
930571	Black, Yellow	**€ 7.95**

IP68
max.2m

IP68

MULTI OUTDOOR Y-SHAPED CABLE CONNECTOR | CONNECTION SLEEVE

- **Waterproof M25 cable glands**
- **For three cables measuring 4-14 mm (adapter sleeves included in the scope of delivery)**
- **For two to three wires measuring 0.5-4 mm²**

Housing	PA 6.6 - Polyamide 6.6	Height	32.56 mm
Length	139.71 mm	Rated Input Voltage	12-450 V/AC
Width	71.88 mm	Rated Current	24 A

Article	Housing Color	Price
930573	Black, Yellow	**€ 8.95**

IP68
max.2m

IP66

MULTI OUTDOOR CABLE DISTRIBUTOR TWO-WAY

- **For wiring low-voltage and 230 V outdoor components**
- **Robust housing**
- **For wires measuring 0.5-2.5 mm²**
- **For two cables measuring 5-12 mm**
- **Versatile thanks to the adapter sleeves included in the scope of delivery**
- **Watertight M20 cable glands**
- **Cover: Quick-action coupling (screwless)**

Housing	PA 6.6 - Polyamide 6.6	Rated Input Voltage	12-450 V/AC
Height	46.31 mm	Rated Current	24 A
Ø	65.33 mm		

Article	Housing Color	Price
930578	Black	**€ 5.95**

IP66

IP68

MULTI OUTDOOR CABLE DISTRIBUTOR TWO-WAY

- **Watertight M20 cable glands**
- **For two cables measuring 5-12 mm**
- **Adapter sleeves included in scope of delivery**
- **For wires measuring 0.5-2.5 mm²**
- **Screwed cover (screws included in scope of delivery)**

Housing	PA 6.6 - Polyamide 6.6	Height	42 mm
Length	125 mm	Rated Input Voltage	12-450 V/AC
Width	70 mm	Rated Current	24 A

Article	Housing Color	Price
930712	Black	**€ 7.95**

IP68
max.2m

IP68

MULTI OUTDOOR CABLE DISTRIBUTOR FOUR-WAY

- **Watertight M25 cable glands**
- **For two to four cables measuring 4-14 mm**
- **Adapter sleeves and two blanking plugs included in scope of delivery**
- **For wires measuring 0.5-4.0 mm²**
- **Screwed cover (screws included in scope of delivery)**

Housing	PA 6.6 - Polyamide 6.6	Height	35.3 mm
Length	112.54 mm	Rated Input Voltage	12-450 V/AC
Width	93.3 mm	Rated Current	24 A

Article	Housing Color	Price
930575	Black	**€ 9.95**

IP68
max.2m

IP68

MULTI OUTDOOR CABLE DISTRIBUTOR FOUR-WAY

- **Watertight M25 cable glands**
- **For two to four cables measuring 4-14 mm**
- **Adapter sleeves and two blanking plugs included in scope of delivery**
- **For wires measuring 0.5-4.0 mm²**
- **Screwed cover (screws included in scope of delivery)**

Housing	PA 6.6 - Polyamide 6.6	Height	35.3 mm
Length	112.54 mm	Rated Input Voltage	12-450 V/AC
Width	93.3 mm	Rated Current	24 A

Article	Housing Color	Price
930735	Black	**€ 15.95**

IP68
max.2m

IP68

MULTI OUTDOOR CABLE DISTRIBUTOR TEN-WAY

- **Watertight M25 cable glands**
- **For two to ten cables measuring 4-14 mm**
- **Adapter sleeves and eight blanking plugs included in scope of delivery**
- **For wires measuring 0.5-4 mm²**
- **Screwed cover (screws included in scope of delivery)**
- **For wiring low-voltage and 230 V outdoor components**
- **Versatile thanks to the adapter sleeves included in the scope of delivery**

Housing	PA 6.6 - Polyamide 6.6	Height	49.1 mm
Length	182.95 mm	Rated Input Voltage	12-450 V/AC
Width	135.3 mm	Rated Current	24 A

Article	Housing Color	Price
930574	Black	**€ 31.95**

IP68
max.2m

GEL ADHESIVE FOR BONDING END CAPS

- **Cyanoacrylate instant adhesive**
- **3 g tube**
- **Strong initial bond**
- **Excellent adhesion to almost all surfaces, such as metals, steel, stainless steel, zinc-plated steel, aluminium, plastics (e.g. ABS, GFRP, hard PC) and ceramic materials**
- **Curing time: 8-12 hours**
- **Observe the safety and application instructions**

Length	60 mm	Height	10 mm
Width	20 mm		

Article	Price
930593	**€ 4.95**

ASSEMBLY ADHESIVE

- **Bond+Seal Power**
- **310 ml cartridge**
- **Heavy-duty, elastic 1-component structural adhesive**
- **Excellent adhesion to almost all surfaces, such as metals, steel, stainless steel, galvanised steel, aluminium, plastics (e.g. ABS, GFRP, hard PVC) or ceramic materials**
- **UV-resistant**
- **Approved for use with foodstuffs according to NSF (NSF, P1 registered: 136996)**
- **High degree of initial strength**
- **Can be painted over with all commercially available paint systems (except alkyd resin paints)**

Height	230 mm	Ø	49 mm

Article	Price
930105	**€ 28.95**

NATURAL STONE SEALANT

- **310 ml cartridge**
- **Suitable for bonding profile covers and for use in wet rooms**
- **Does not attack the surface of LEDs/strips**
- **Permanently elastic**
- **Highly resistant to weathering, UV and ageing and excellent colour fastness**
- **Ideal for high loads outdoors**

Height	230 mm	Ø	49 mm

Article	Price
930104	**€ 31.95**

ELECTRIC CHARACTERISTICS

CV constant voltage

CC constant current

SELV safety extra-long voltage

flicker free

solar panel

USB charging socket

battery operation

LAMP

E14 base of lamp

FUNCTIONALITY

swivel-mounted +
rotatable and swivel-mounted + rotatable

radiation direction

SURFACE

NANO coating IP XX [see product description]
lotus effect: Water rolls off and takes all dirty surface particles with it.

surface paintable /
individual design

CONTROL

movement sensor [IR / HF]

presence detector

DMX DMX control

dimmable

1 CH 4-6 CH number of channels

EL emergency power supply

SAFETY

IP65 IP protection class

walkable

passable

safety lamp control gear

components may be installed on fixtures of materials, the fire behavior of which is not always known.

110 max. surface temperature of lamp control gear

D lights with limited surface temperature

protection class I

protection class II
[protective isolation]

III protection class III
[protective low voltage]

RGBWW RGBNW RGBCW RGB

light colours / channels

CCT RGB+CCT

selectable light colour

hcl

human centric lighting

dtw

dim to warm

Ra>90

Colour rendering index RA

SDCM<5

colour consistency SDCM

UGR<6

UGR

power switch

power switch

L1 L2 L3 Phase

phase switch

tool-free installation

corridor function

RF-smart zigbee DALI RF Bluetooth WiFi

control type

BEG

BEG eligible

suitable for VDU workstations

passable

Through-wiring possible

on off

light can be switched separately

IP23 IP40 IP44 IP54 IP55 IP65 IP66 IP67 IP68 IP68

IP protection

seawater resistant

IK10

IK Impact resistance

1/2 2/2

mix'n match

Nightsaver

EVERYTHING IN VIEW

Optik Eberle, retail trade, conversion

design:
Optik Eberle
Marktstraße 24
75305 Neuenbürg
optik-eberle.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Andris Balodis

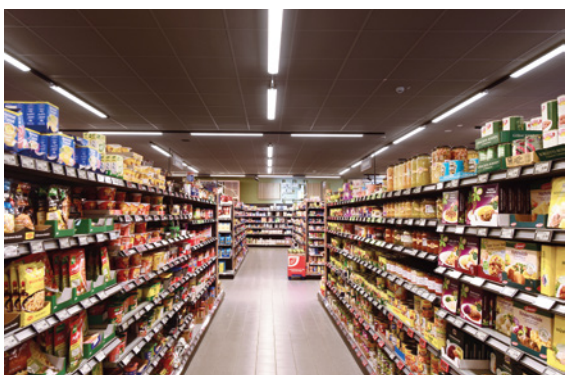

FLEXIBLE SHOPPING EXPERIENCE

EDEKA, retail trade, refurbishment

realisation:
meerLICHT
Lunser Dorfstraße 12
27321 Thedinghausen
meerlicht.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Andris Balodis

DRAWING WITH LIGHT

La Croix Architekten, office, new building

design and lighting design:
La Croix Architekten
Reitteilstraße 8
76297 Stutensee
lacroix-architekten.de

scope:
product delivery

photo:
Daniel Vieser . Architekturfotografie,Hildesheim/Karlsruhe

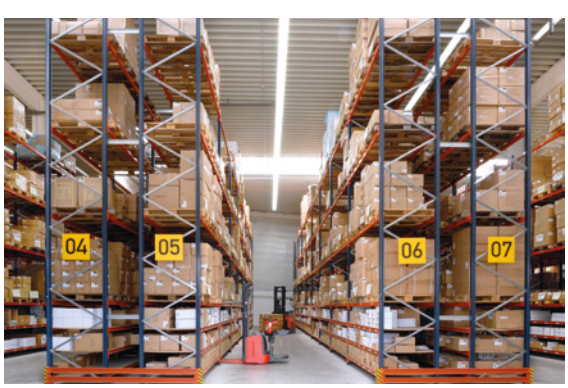

NEW LIGHT FOR MORE EFFICIENCY

high-bay warehouse, LED light-band system, refurbishment

realisation:
Elektrotechnik
Mike Kronenwett
Bahnhofstraße 8
76307 Karlsbad

extent:
consulting inkl. Amortisationsrechnung,
lighting design, 3D visualization, Projektlieferung

photo:
Roman Schinzel

OFFICE AND BIORHYTHM

EMSR, office building, new building

design and realisation:
EMSR-Technik GmbH
Dieselstraße 32
61200 Wölfersheim
emsrtechnik.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Roman Schinzel

MODERN LOUNGE

Base One / Mohr Solutions, Ingenieure company building, conversion

design and realisation:
OKTEC GmbH
Wiesenstraße 8/1
73054 Eislingen
ok-tec.de

lighting design:
lighting design Rottke
lichtplanung-rottke.de

scope:
consulting, product delivery

photo:
Alexander Cevolani

LINEAR AND TRANSPARENT

mars solutions, office- and event areas, core refurbishment

design and realisation:
OKTEC GmbH
Wiesenstraße 8/1
73054 Eislingen
ok-tec.de

lighting design:
lighting design Rottke
lichtplanung-rottke.de

scope:
consulting, product delivery

photo:
Alexander Cevolani

MODERN THERAPY CENTRE

Physiotherapie Senger, practice rooms, refurbishment

design and realisation:
Elektro Huml GmbH
Egmatinger Straße 9
85635 Siegertsbrunn
elektro-huml.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Tanja Dörfner

MORE LIGHT AND QUALITY OF LIFE

Wilhelmshilfe e.V., nursing home, refurbishment

design and realisation:
OKTEC GmbH
Wiesenstraße 8/1
73054 Eislingen
ok-tec.de

lighting design:
lighting design Rottke
lichtplanung-rottke.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Alexander Cevolani

MODERN LEARNING

Mühlbachschule, educational institution, refurbishment

design:
K+H | KILIAN + PARTNER
kh-architekten.de

realisation:
Endlichhofer Elektrotechnik
endlichhofer.de

lighting design:
Ingenieurbüro Markus Reuder
reuder.de

scope:
product delivery

photo:
Daniel Vieser . Architekturfotografie, Hildesheim/Karlsruhe

LIGHT FOR THE HIDDEN CHAMPION

WIBU-Systems, company, new building

design:
Architekturbüro archis
archis.de

project development:
IBA Immobilien
iba-heinze.de

project management:
mdbm
mdbm-baumanagement.de

general contractor:
Wolff+Müller
wolff-mueller.de

electrical installation:
Prinzing Elektrotechnik
prinzing-elektro.de

scope:
consulting, lighting design, product delivery

photos:
Andris Balodis

EVERY PLATE IN THE IDEAL LIGHT

Becks, restaurant, general refurbishment

design and realisation:
SH-Lichttechnik
Wörthstraße 74
72766 Reutlingen

lighting design:
Sven Hackius

scope:
consulting, product delivery

photo:
Andris Balodis

LIGHT IN THE ROCK

Mawell, hotel, new building

design:
KommInvest GmbH & Co. KG
komm-invest.de

realisation:
FARMBAU Fertigsysteme GmbH
farmbau.eu

lighting design:
Lichtdesign Gommel

scope:
consulting, product delivery

photo:
Andris Balodis

GARDEN DREAM IN BERLIN

private building, garden landscape, new building

design and realisation:
Gärten von Klein GmbH & Co. KG
Gut-Asselborn Nr. 1
51429 Bergisch Gladbach
gaertenvonklein.de

lighting design:
Günter Klein

scope:
consulting, product delivery

photo:
Grit Erlebach

LINEARES LICHT BIS IN DEN LETZTEN WINKEL

private building, linear light, new building

design and realisation:
BES T – Bellemann Elektro Service Team GmbH
Letzenbergstraße 37a
69231 Rauenberg-Malschenberg

lighting design:
Michael Berger
best-elektro.de

scope:
product delivery

0
000097 ... 819
000099 ... 819
000103 ... 819
000104 ... 819
000106 ... 819
000107 ... 819
000109 ... 819

1
100032 ... 157
100078 ... 156
100079 ... 156
100084 ... 149
100088 ... 149
100089 ... 149
100111 ... 526
100114 ... 526
100122 ... 149
100123 ... 152
100124 ... 153
100125 ... 152
100133 ... 530
100138 ... 153
100139 ... 152
100140 ... 146
100141 ... 146
100142 ... 147
100143 ... 146
100144 ... 146
100145 ... 147
100146 ... 148
100147 ... 148
100148 ... 149
100149 ... 146
100150 ... 146
100151 ... 148
100152 ... 159
100153 ... 159
100154 ... 152
100156 ... 159
100157 ... 159
100158 ... 154
100159 ... 158
100160 ... 158
100200 ... 872
100202 ... 872
100204 ... 873
100250 ... 872
110017 ... 91
110019 ... 90
110038 ... 86
110039 ... 86
110040 ... 86
110041 ... 86
110042 ... 86
110043 ... 86
110044 ... 87
110045 ... 87
110046 ... 87
110047 ... 87
110048 ... 87
110049 ... 87
110050 ... 88
110051 ... 88
110052 ... 88
110053 ... 88
110054 ... 88
110055 ... 88
110056 ... 89
110057 ... 89
110058 ... 89
110059 ... 89
110060 ... 89
110061 ... 89
122416 ... 78
122417 ... 79
180195 ... 867
180196 ... 867
180264 ... 860
180277 ... 864
180286 ... 861
180287 ... 861
180295 ... 861
180296 ... 862
180297 ... 862
180298 ... 862
180299 ... 862
180309 ... 860
180317 ... 862
180318 ... 860
180319 ... 862
180368 ... 860
180512 ... 812
180513 ... 812
180514 ... 812
180515 ... 819
180529 ... 819
180730 ... 33
180731 ... 33
180732 ... 34
180733 ... 34
180734 ... 35
180735 ... 35
180736 ... 35
180737 ... 35
180741 ... 35
180742 ... 35
180743 ... 35
180744 ... 862
180745 ... 862
180746 ... 860
180747 ... 862
180748 ... 860
180749 ... 860
180750 ... 860
180751 ... 860
180752 ... 861
180753 ... 862
180754 ... 864

3
341183 ... 164
341184 ... 164
341194 ... 162
341195 ... 162
341196 ... 162
341200 ... 163
341202 ... 163
341236 ... 181
341237 ... 181
341242 ... 180
341243 ... 180
341249 ... 164
341250 ... 164
341333 ... 184
341334 ... 184
341335 ... 184
341336 ... 184
341337 ... 182
341338 ... 182
341339 ... 182
341340 ... 182
341341 ... 167
341342 ... 167
341343 ... 168
341344 ... 168
341345 ... 186
341346 ... 186
341347 ... 186
341348 ... 186
341349 ... 186
341350 ... 186
341351 ... 186
341352 ... 186
342177 ... 26
342178 ... 26
342181 ... 26
342182 ... 26
342189 ... 22
342190 ... 22
342191 ... 22
342192 ... 22
342193 ... 22
342194 ... 22
342195 ... 22
342196 ... 22
342197 ... 22
342198 ... 22
342199 ... 22
342200 ... 22
342201 ... 20
342202 ... 20
342203 ... 20
342204 ... 20
342205 ... 20
342206 ... 20
342207 ... 20
342208 ... 20
342209 ... 20
342210 ... 20
342211 ... 20
342212 ... 20
342213 ... 24
342214 ... 24
342219 ... 202
342220 ... 202
342221 ... 202
342228 ... 212
342229 ... 212
342230 ... 212
342231 ... 214
342232 ... 214
342233 ... 214
342237 ... 24
342238 ... 24
342241 ... 24
342242 ... 24
342243 ... 28
342244 ... 28
342245 ... 28
342246 ... 28
342247 ... 29
342248 ... 29
342251 ... 200
342252 ... 200
342253 ... 200
342254 ... 30
342255 ... 30
342256 ... 30
342257 ... 30
342258 ... 204
342259 ... 204
342260 ... 204
342261 ... 205
342262 ... 205
342263 ... 205
343022 ... 209
343025 ... 195
343026 ... 195
343030 ... 206
343032 ... 207
343037 ... 190
343038 ... 190
343039 ... 192
343040 ... 192
346015 ... 194
346016 ... 194
346026 ... 196
346027 ... 196
346028 ... 196
346063 ... 213
346064 ... 213
346065 ... 213
346066 ... 215
346067 ... 215
346068 ... 215
346086 ... 191
346087 ... 191
346088 ... 192
346089 ... 192
348022 ... 78
348023 ... 78
348024 ... 79
348025 ... 79
348071 ... 485
348072 ... 485
348107 ... 56
348122 ... 57
348123 ... 58
348124 ... 54
348125 ... 55
348127 ... 59
348153 ... 60
348154 ... 60
348155 ... 60
348156 ... 60
348157 ... 60
348158 ... 60
348159 ... 60
348160 ... 60
348161 ... 62
348162 ... 62
348163 ... 62
348164 ... 62
348165 ... 62
348166 ... 62
348167 ... 62
348168 ... 62
348175 ... 55
348176 ... 59
348177 ... 58
348178 ... 57
348179 ... 54
348180 ... 44
348181 ... 44
348182 ... 44
348183 ... 44
348186 ... 42
348187 ... 42
348188 ... 42
348189 ... 42
348190 ... 42
348191 ... 42
348192 ... 42
348193 ... 42
348194 ... 42
348195 ... 42
348196 ... 42
348197 ... 42
348198 ... 40
348199 ... 40
348200 ... 40
348201 ... 40
348202 ... 40
348203 ... 40
348204 ... 40
348205 ... 40
348206 ... 40
348207 ... 40
348208 ... 40
348209 ... 40
348210 ... 56
348213 ... 64
348214 ... 64
348215 ... 64
348216 ... 64
348223 ... 65
348224 ... 65
348225 ... 65
348226 ... 65
348233 ... 57

348234 57
348235 58
348236 58
348237 66
348238 66
348239 67
348240 67
348241 68
348242 68
348243 69
348244 69
348245 70
348246 70
348247 70
348248 70
348249 70
348250 70
348251 72
348252 72
348253 72
348254 72
348255 72
348256 72
348258 80
348259 80
348260 80
348261 83
348262 83
348263 83
348264 76
348265 76
348266 76
348267 76
348268 76
348269 76
348270 76
348271 76
348272 76
348273 76
348274 76
348275 76
348276 48
348277 48
348278 48
348279 50
348280 50
348281 50
348285 51
348286 51

5

565193 108
565194 109
565327 140
565328 140
565329 140
565337 106
565338 106
565339 106
565342 124
565343 122
565344 125
565351 125
565352 138
565353 138
565354 124
565355 98
565356 98
565357 98
565358 98
565359 98
565360 98
565361 122
565371 98
565372 98
565373 98
565374 98
565375 98
565376 98
565377 98
565378 98
565379 98
565380 99
565381 99
565382 99
565383 99
565384 99
565385 106
565386 106
565387 106
565388 100
565389 100
565390 100
565391 100
565392 100
565393 100
565394 100
565395 100
565396 100
565397 100
565398 100
565399 100
565400 100
565401 100
565402 100
565403 101
565404 101
565405 101
565406 101
565407 101
565408 120
565409 120
565410 130
565411 130
565412 130
565413 130
565414 130
565415 130
565416 130
565417 130
565418 130
565419 130
565420 130
565421 130
565422 132
565423 132
565424 132
565425 132
565426 133
565427 133
565428 133
565429 133
565430 134
565431 134
565432 134
565433 134
565434 134
565435 134
565436 134
565437 134
565438 134
565439 134
565440 134
565441 134
565442 135
565443 135
565444 135
565445 135
565446 136
565447 136
565448 136
565449 136
565450 103
565451 103
565452 103
565453 103
565454 103
565455 104
565456 104
565457 104
565458 104
565459 105
565460 105
565461 105
565462 105
565463 113
565464 113
565465 113
565466 113
565467 113
565468 113
565469 113
565470 113
565471 113
565472 113
565473 113
565474 113
565475 113
565476 113
565477 113
565478 113
565479 113
565480 113
565733 174
565734 174
565736 176
565737 176
565745 129
565746 129
565747 129
565748 129
565749 129
565750 129
565751 129
565752 129
565753 129
565754 129
565755 92
565756 92
565757 92
565758 92

6

620033 46
620034 46
620035 46
620036 46
620037 46
620038 46
620039 46
620040 46
620041 46
620042 46
620043 46
620044 46
620045 46
620046 46
620047 46
620048 46
620049 46
620050 46
620051 46
620052 46
620053 46
620054 46
620055 46
620056 46
620123 478
620124 478
620125 478
620126 478
620127 478
620194 414
620195 414
620196 414
620197 414
620198 414
620199 414
620200 414
620201 414
620202 416
620203 416
620204 416
620205 416
620206 416
620207 416
620208 416
620209 416
688020 544
688021 544

7

700229 875
700230 875
707036 391
707037 391
707038 391
707039 391
707040 390
707041 390
707042 390
707043 390
707044 389
707054 391
707055 391
707056 390
707057 390
707079 383
707080 383
707081 383
707094 386
707095 386
707096 386
707097 386
707098 386
707099 386
707100 386
707101 386
707102 386
707103 386
707104 386
707105 386
707106 386
707107 386
707108 386
707109 386
707116 404
707117 404
707118 404
707119 404
707120 404
707121 404
707122 404
707123 404
707124 400
707125 400
707128 400
707129 400
707131 389
707132 408
707133 408
707134 368
707135 368
707136 368
707137 368
707141 376
707142 376
707143 376
707144 376
707145 377
707146 377
707147 369

707148 369
707149 369
707150 369
707151 369
707152 369
707153 369
707154 369
707155 287
707156 287
707161 408
707162 408
707163 295
707164 295
707165 296
707166 296
707167 296
707168 296
707175 297
707176 297
707177 297
707178 297
707183 406
707184 406
707187 292
707188 292
707189 378
707190 378
707191 378
707192 378
707193 379
707194 379
707195 376
707196 376
707197 376
707198 376
707199 377
707200 377
707201 294
707202 294
707203 409
707204 409
707205 378
707206 378
707207 378
707208 378
707209 379
707210 379
707211 298
707212 298
707213 407
707214 407
707215 299
707216 299
707217 401
707218 401
707219 372
707220 372
707221 372
707222 372
707223 373
707224 373
707226 244
707227 244
707228 244
707229 247
707230 247
707231 247
707232 403
707233 403
707234 399
707235 399
707238 399
707239 399
707240 402
707241 402
707242 402
707243 402
707244 398
707245 398
707246 384
707247 384
707248 384
707249 290
707250 290
707251 381
707252 381
707253 289
707254 289
707255 381
707256 381
707257 289
707258 289
707264 365
707265 365
707266 365
707267 365
707268 364
707269 364
707270 364
707271 364
707274 248
707277 248
707280 249
707283 249
707284 366
707285 366
707286 366
707287 366
707292 366
707293 366
707294 366
707295 366
707296 367
707297 367
707298 367
707299 367
707304 367
707305 367
707306 367
707307 367
707328 375
707329 375
707330 375
707331 375
707332 375
707333 375
707334 375
707335 375
710000 310
710002 310
710003 310
710005 310
710006 310
710008 310
710009 314
710011 314
710012 314
710014 314
710015 316
710017 316
710018 316, 348
710020 316, 348
710024 330, 360
710026 330, 360
710027 318
710029 318
710030 318
710032 318
710033 319
710035 319
710036 317
710038 317
710039 315
710041 315
710042 315
710044 315
710045 313
710047 313
710048 324, 356
710050 324, 356
710051 327, 359
710053 327, 359
710054 331, 361
710056 331, 361
710057 322, 354
710059 322, 354
710060 331, 361
710062 331, 361
710063 321, 353
710065 321, 353
710066 320, 352
710068 320, 352
710077 320, 352
710078 323, 355
710079 320, 352
710082 326, 358
710083 326, 358
710084 323, 355
710086 323, 355
710087 323, 355
710094 324, 356
710096 324, 356
710097 328
710099 328
710103 320, 352
710104 322, 354
710106 322, 354
710107 345
710108 321, 353
710109 321, 353
710110 325, 357
710112 325, 357
710113 312, 343
710114 312, 343
710115 312, 343
710116 312, 343
710117 325, 357
710118 325, 357
710500 340
710501 340
710502 340
710503 340
710504 340
710505 340
710506 344
710507 344
710508 344
710509 344
710510 344
710511 344
710512 341
710513 341
710514 346
710515 346
710516 346
710517 346
710520 347
710521 347
710523 347
710524 347
710525 348
710526 348
710527 349
710528 349
710530 350
710531 350
710532 350
710533 350
710535 351
710536 351
710538 320, 352
710539 360
710540 360
720000 270
720001 270
720002 270
720003 270
720004 270
720005 270
720006 274
720007 274
720008 274
720009 274
720010 275
720011 275
720012 275
720013 275
720014 276
720015 276
720016 276
720017 276
720018 277
720019 277
720020 278
720021 278
720022 278
720023 278
720024 279
720025 279
720026 277
720027 277
720028 279
720029 279
720030 280
720031 280
720032 282
720033 282
720034 283
720035 283
720036 281
720037 281
720038 280
720039 280
720040 282
720041 282
720042 273
720043 273
720044 273
720045 273
720046 283
720047 283
730255 534
730262 537
730266 529
730267 529
730276 532
730289 535
730292 537
730296 531
730300 875
730301 875
730330 474
730336 526
730349 875
730408 484
730432 537
730434 537
730454 533
730459 525
730474 524
730475 524
730478 524
730479 524
730483 229
730484 230
730485 231
730486 229
730487 230
730488 231
730489 229
730490 230
730491 231

730492 428
730493 428
730494 428
730495 424
730496 424
730497 424
730498 424
730499 422
730500 422
730501 422
730502 422
730503 422
730504 422
730505 422
730506 422
730509 229
730510 229
730511 229
730519 427
730520 427
730521 427
731015 464
731019 464
731020 464
731024 464
731025 464
731026 464
731029 465
731030 465
731031 458
731060 474
731099 471
731100 471
731126 478
731127 468
731129 472
731130 462
731131 462
731133 459
731134 472
731135 472
731136 472
731138 476
731139 477
731140 476
731141 477
731144 459
731151 461
731153 460
731154 460
731155 460
731156 460
731157 461
731158 480
731159 480
731160 232
731161 232
731162 232
731163 234
731164 234
731165 234
731166 235
731167 235
731168 235
731169 450
731170 450
731171 450
731172 450
731173 450
731174 450
731175 451
731176 451
731177 451
731178 451
731179 451
731180 451
731181 456
731182 456
731183 456
731184 456
731185 456
731186 456
731187 457
731188 457
731189 457
731190 457
731191 457
731192 457
731193 449
731194 449
731195 449
731196 448
731197 448
731198 448
731199 455
731200 455
731201 455
731202 454
731203 454
731204 454
731205 452
731206 452
731207 452
731208 453
731209 453
731210 453
731211 444
731212 444
731213 444
731214 445
731215 445
731216 445
731217 446
731218 446
731219 446
731220 447
731221 447
731222 447
731223 466
731224 466
731225 467
731226 467
731227 474
731228 462
731229 462
731230 462
731231 462
731232 462
731233 462
732049 528
732050 528
732071 520
732072 520
732079 521
732080 521
732094 513
732095 513
732096 541
732097 541
732098 541
732102 541
732108 514
732109 515
732110 516
732127 514
732128 515
732129 516
732143 528
732156 222
732157 225
732158 222
732159 225
732160 512
732161 512
732162 219
732163 220
733004 436
733040 432
733041 432
733042 432
733043 434
733044 434
733045 434
733054 498
733055 498
733064 502
733065 502
733066 500
733067 500
733068 438
733069 438
733070 504
733071 504
733072 430
733073 430
763025 488
763026 490

8

829063 872
836011 494
836014 494
836930 494
836931 494
840124 762
840147 756
840158 748
840159 748
840164 745
840165 745
840166 745
840167 745
840175 749
840178 756
840179 756
840180 756
840186 753
840187 753
840192 762
840193 762
840194 762
840210 749
840236 759
840239 757
840254 754
840256 755
840267 749
840276 752
840289 767
840291 747
840293 787
840294 787
840295 787
840308 765
840309 765
840317 783
840318 782
840319 783
840320 782
840331 763
840332 763
840333 764
840334 764
840337 782
840338 783
840339 782
840340 783
840349 751
840350 750
840353 758
840373 760
840378 761
840386 785
840387 785
840388 785
840389 785
840390 785
840391 785
840392 787
840393 780
840394 780
840395 780
840396 781
840397 781
840398 781
840399 778
840400 779
840401 780
840402 780
840403 780
840404 781
840405 781
840406 781
840407 778
840408 779
840409 729
840410 729
840411 729
840412 729
840414 730
840416 730
840417 769
840418 769
840419 769
840420 732
840421 732
840422 732
840423 732
840424 732
840425 732
840426 732
840427 732
840428 732
840429 732
840430 734
840431 734
840432 734
840433 734
840434 772
840435 773
840436 772
840437 773
840438 772
840439 773
840440 780
840441 781
840442 780
840443 781
840444 780
840445 781
840446 778
840447 779
840448 774
840449 775
840450 774
840451 775
840452 774
840453 775
840454 776
840455 777
840456 776
840457 777
840458 776
840459 777
840460 776
840461 777
840462 776
840463 777
840464 776
840465 777
840466 742
840467 742

840468 742
840469 742
840470 743
840471 743
840472 743
840473 743
840474 736
840475 736
840476 736
840477 737
840478 737
840479 737
840480 738
840481 739
840482 740
840483 741
843008 850
843011 850
843037 851
843049 851
843050 851
843055 874
843273 852
843279 852
843340 853
843341 854
843342 854
843343 855
843344 855
843500 827
843501 829
843502 830
843503 832
843504 833
843505 834
843506 835
843507 847
843508 836
843509 836
843510 837
843511 837
843512 841
843513 844
843514 846
843518 540
843519 540
843520 540
843521 508
843522 845
843523 838
843524 839
843525 840
843527 848
843529 849
843530 392
843531 392
843532 863
843533 865
843534 866
843535 843
843537 826
843538 828
843539 508
843540 511
843542 831
862048 812
862093 799
862094 799
862121 799
862122 799
862123 799
862124 799
862125 799
862126 799
862127 800
862130 812
862136 814
862157 812
862162 800
862163 800
862164 800
862165 800
862166 800
862167 800
862168 800
862172 799
862173 799
862180 329
862181 329
862182 329
862183 329
862184 329
862185 329
862190 817
862191 817
862192 817
862193 817
862194 817
862196 812
862197 812
862198 812
862199 812
862201 812
862202 814
862203 814
862204 814
862205 814
862207 814
862208 814
862209 814
862210 814
862211 814
862220 803
862221 803
862222 803
862223 812
862224 812
862225 812
862226 812
862227 812
862228 812
862229 798
862230 798
862231 799
862232 799
862233 799
862234 799
862235 813
862236 813
862237 813
862238 811
862239 811
862240 803
862241 803
862242 803
862253 805
862254 805
862255 805
862256 805
862257 814
862258 814
862259 814
862262 805
862263 805
862264 814
862265 799
862266 815
862268 802
862269 802
862270 799
862271 799
862272 799
862273 805
862274 803
862275 805
862276 805
862277 803
862278 803
862280 802
862281 802
862282 802
862283 802
862285 814
862299 807
862300 807
862301 807
872014 813
872045 802
872046 802
872082 800
872083 800
872084 800
872085 800
872086 800
872087 800
872088 800
872089 800
872091 800
872093 800
872094 800
872105 801
872106 801
872107 801
872108 801
872109 807
872110 807
872111 807
872112 807
872113 807
872114 807
872115 807
872125 801
872126 805
872127 798
872128 798
872129 811
872130 811
872131 811
872132 813
872134 813
872135 804
872136 804
872137 804
872138 804
872142 804
872143 804
872145 800
872146 806
872147 806
872148 806
872628 812
872629 799
872630 799

9

930060 874
930104 883
930105 883
930301 77, 187, 193, 291, 385
930302 77, 187, 193, 291, 385
930303 77, 187, 193, 291, 385
930345 787
930346 787
930347 787
930348 787
930349 787
930350 787
930366 77, 187, 193, 291, 385
930406 787
930413 489
930414 489
930415 489
930416 489
930417 489
930418 489
930419 489
930420 489
930421 489
930422 489
930423 489
930424 489
930426 875
930427 875
930461 490
930468 490
930469 490
930470 490
930471 490
930472 490
930473 490
930474 490
930475 490
930476 490
930477 490
930478 490
930512 756
930517 759
930571 879
930573 879
930574 882
930575 881
930578 880
930593 883
930659 875
930694 873
930712 880
930735 881
930908 32
930909 32
930913 36
930914 36
930920 257
930922 257
930946 257
930947 257
930954 259
930955 259
930956 260
930957 260
930958 261
930959 261
930965 32
930966 32
930967 95, 137
930968 95, 137
930969 95, 137
930970 95, 137
930971 95, 137
930972 95, 137
930973 95, 137
930974 95, 137
930975 95, 137
930976 95, 137
931007 175
931009 175
931010 177
931012 177
931013 175
931015 175
931016 177
931018 177
931019 175
931021 175
931022 177
931024 177
931025 175
931027 175
931028 177
931030 177
931031 175
931033 175
931034 177

931036 177
931037 175
931039 175
931040 177
931042 177
931043 95, 137
931044 95, 137
931045 95, 137
931046 95, 137
931047 95, 137
931048 95, 137
931049 95, 137
931050 95, 137
931051 95, 137
931052 95, 137
931053 77, 291, 385
931054 77, 291, 385
931055 77, 291, 385
931056 77, 291, 385
931057 77, 291, 385
931058 77, 291, 385
931059 187, 193
931060 187, 193
931061 187, 193
931062 187, 193
931063 187, 193
931064 187, 193
931088 258
931089 258
931090 260
931091 260
931168 250
931169 251
940010 875
940029 877
940030 877
940031 877
940033 877
940034 877
940035 877
940037 877
940038 877
940039 877
940041 878
940042 878
940043 878
940045 878
940046 878
940047 878
940049 878
940050 878
940051 878
940056 876
940057 876
940058 876
940059 876
940060 876
940061 876
940062 876
940063 876
950216 554
950217 554
950218 554
950219 554
950220 554
950221 554
950222 554
950223 554
950224 554
950225 554
950226 554
950227 554
950228 554
950229 554
950230 554
950231 554
950232 554
950233 554
950234 555
950235 555
950236 555
950237 555
950238 555
950239 555
950240 555
950241 555
950242 555
950243 555
950244 555
950245 555
950246 555
950247 555
950248 555
950249 555
950250 555
950251 555
950252 556
950253 556
950254 556
950255 556
950256 556
950257 556
950258 556
950259 556
950260 556
950261 556
950262 556
950263 556
950264 556
950265 556
950266 556
950267 556
950268 556
950269 556
950270 557
950271 557
950272 557
950273 557
950274 557
950275 557
950276 557
950277 557
950278 557
950279 557
950280 557
950281 557
950282 557
950283 557
950284 557
950285 557
950286 557
950287 557
950918 558
950919 558
950920 558
950921 558
950922 558
950923 558
950924 558
950925 558
950926 558
950927 558
950928 558
950929 558
950930 558
950931 558
950932 558
950933 558
950934 558
950935 558
970001 628
970003 628
970005 628
970021 632
970023 632
970025 632
970028 632
970041 636
970043 636
970045 636
970048 636
970061 640
970063 640
970065 640
970068 640
970081 624
970085 624
970101 630
970103 630
970105 630
970121 634
970123 634
970125 634
970128 634
970141 638
970143 638
970145 638
970148 638
970161 642
970163 642
970165 642
970168 642
970181 626
970183 626
970185 626
970280 660
970281 660
970284 660
970285 660
970301 672
970303 672
970305 672
970401 674
970403 674
970404 674
970460 668
970470 670
970502 664
970503 664
970522 666
970523 666
970550 678
970551 678
970560 680
970561 680
970570 682
970571 682
970572 582
970573 582
970574 582
970575 582
970576 582
970577 582
970578 583
970579 583
970580 583
970581 583
970582 583
970583 583
970584 584
970585 584
970586 584
970587 584
970588 584
970589 584
970741 714
970800 594
970801 594
970802 594
970803 594
970804 595
970805 595
970806 595
970807 595
970808 595
970809 595
970820 598
970821 598
970822 598
970823 598
970824 598
970825 598
970826 598
970827 598
970828 598
970829 603
970830 603
970831 603
970832 603
970833 599
970834 599
970835 599
970836 599
970837 599
970838 599
970839 599
970840 599
970841 599
970842 608
970843 608
970844 608
970845 608
970846 608
970847 608
970848 608
970849 608
970850 608
970851 610
970852 610
970853 610
970854 610
970855 610
970856 610
970857 610
970858 610
970859 610
970860 609
970861 609
970862 609
970863 609
970864 609
970865 609
970866 609
970867 609
970868 609
970869 602
970870 602
970871 602
970872 602
975001 644
975003 644
975005 644
975021 648
975023 648
975025 648
975041 652
975045 652
975049 652
975101 646
975103 646
975105 646
975121 650
975123 650
975125 650
975141 654
975143 654
975145 654
975161 656
975163 656
975165 656
975361 706
975365 706

975371 708
975375 708
975381 710
975385 710
975411 676
975412 676
975471 688
975475 688
975483 690
975485 690
975491 686
975495 686
975501 694
975511 698
975516 700
975521 702
975525 696
975530 692
975741 716
975781 718
988170 605
988171 605
988172 605
988173 605

KS Licht – Su mayorista de iluminación de Essen

Contacto, atención al cliente e información para los clientes
LIGHT Impressions 2026 | 2027

Directamente vinculado a la gama de productos, el asesoramiento y el servicio de proyectos

En la tienda online de KS Multi Brand Business encontrará productos actuales, novedades y ofertas, así como información que le ayudará en el asesoramiento, la elaboración de presupuestos y la gestión de proyectos:

- Comprobación online de la disponibilidad de productos
- Catálogos, catálogos para hojear y enlaces a productos
- Datos técnicos, textos de licitación, curvas de distribución luminosa y archivos LDT
- Búsqueda y pedido cómodos de piezas de recambio
- Visualización de sus condiciones individuales, así como de las condiciones de entrega y pago
- Recomendaciones de productos adecuados, variantes y productos alternativos
- Contacto directo con nuestro equipo de ventas

Información para el cliente

Todos los precios son netos, más el IVA legal correspondiente. Los precios de venta indicados son precios recomendados. Con la publicación de este catálogo, las listas de precios anteriores dejan de tener validez.
Las imágenes, colores, formas, acabados y datos técnicos tienen carácter ilustrativo y no son vinculantes. Sujeto a modificaciones y errores.
El envío se realiza, por regla general, a portes debidos desde fábrica.
Para pedidos con un valor neto inferior a 70,00 €, se aplicará un recargo por cantidad mínima de 8,00 €.

Pedidos y entregas

Al realizar un pedido, indique siempre el número de artículo, el color y la cantidad. Esto reduce las consultas y agiliza la tramitación.
Se ofrecen entregas urgentes y directas previa solicitud.
Los productos fabricados a medida, los componentes seleccionados a petición del cliente y las lámparas no se pueden cambiar.
Se aplican nuestras Condiciones Generales de Contratación, disponibles en www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-luz.es
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH

Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0
E-Mail: verkauf@ks-germany.com

Onlineshop: ks-luz.es
Internet: www.ks-germany.com